INCH-POUND

A-A-55757A
13 February 2012
SUPERSEDING
A-A-55757
11 September 1995

COMMERCIAL ITEM DESCRIPTION

RUBBER, SILICONE; GASKET, SHAPE 13

The General Services Administration has authorized the use of this Commercial Item Description for all Federal Agencies.

1. SCOPE. This commercial item description (CID) covers a silicone rubber gasket, shape 13 (see figure 1).

2. CLASSIFICATION. The silicone rubber shall be of the following class and grade as specified. The designated grade number corresponds to the nominal Shore Durometer A hardness value.

Class 2B – High temperature resistant and low compression set
Grade – 40

3. SALIENT CHARACTERISTICS.

3.1 Dimensional and physical requirements. Dimensional and physical requirements shall conform to Figure 1 and Table I. Dimensional tolerances shall conform to the applicable commercial tolerances specified in CID A-A-59588.

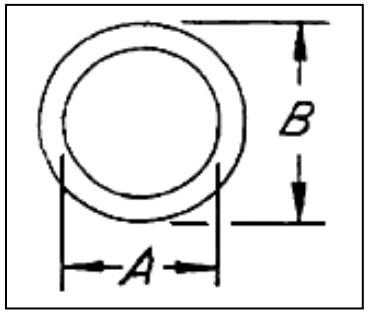

Figure 1. Gasket.

Comments, suggestions, or questions on this document should be addressed to Defense Supply Center Philadelphia (DSCP), ATTN: DSCP-NASA, 700 Robbins Avenue, Philadelphia, PA 19111-5096 or e-mail to dscpg&inspecomments@dla.mil . Since contact information can change, you may want to verify the currency of this address information using ASSIST Online database at https://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

TABLE I. Part Numbers and Dimensions.

Part No.	A Aperture Diameter	B Outside Diameter	Part No.	A Aperture Diameter	B Outside Diameter
AA55757-001D4	17.625	18.875	AA55757-006D4	17.125	18.375
AA55757-002D4	19.000	20.375	AA55757-007D4	16.375	17.312
AA55757-003D4	16.625	18.250	AA55757-008D4	17.438	18.375
AA55757-004D4	18.375	19.375	AA55757-009D4	16.438	17.375
AA55757-005D4	16.375	18.375	AA55757-010D4	15.375	16.312

Notes: 1. Dimensions are in inches.
2. Nonmetallic hardness rating 35.0 min and 45.0 max. Shore Durometer A.
3. Temperature rating: -62°C to 218.50°C (-80°F to 450°F)..
4. Cross-sectional shape style: 164.
5. Cross-sectional thickness: .125.

3.2 Material. Material shall be silicone rubber formulated and processed to meet the physical and mechanical properties per the specified class and grade, when tested in accordance with ASTM test methods specified in Table I of CID A-A-59588.

3.3 Color. Unless otherwise specified, the color of the silicone rubber shall be the natural color of the compound furnished.

3.4 Workmanship. The end product shall be clean, smooth finished, and free from dirt, flash or rough edges.

3.5 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of ASTM SI 10, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

7. NOTES.

7.1 Part identification number (PIN): the following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PINs to be used for items acquired to this description are created as follows:

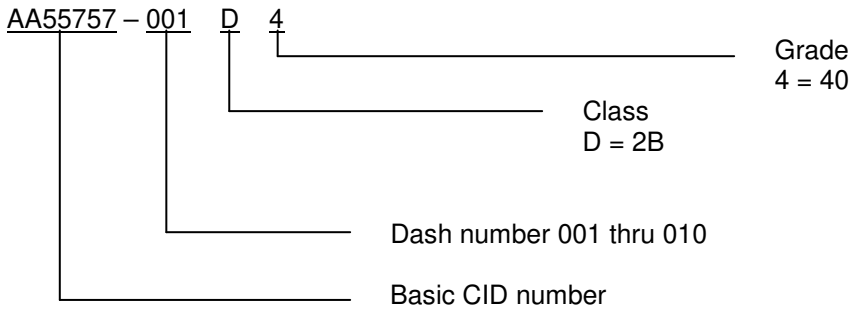

7.2 Ordering data. The contract or order should specify the following:

a. Title, number, and date of this CID.
b. Class and grade required.
c. Length.
d. Color required if other than natural color of compound furnished.
e. Packaging requirements.

7.3 Source of documents.

7.3.1 ASTM standards. ASTM standards are available from the ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959 or online at http://www.astm.org .

7.3.2 FAR. The Federal Acquisition Regulation is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402 or online at http://www.arnet.gov/far .

7.3.3 Government documents. Federal and military documents are available online at https://assist.daps.dla.mil/quicksearch/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.

7.4 Utilization caution. Use of this material in items that may come in contact with human skin, food, or portable water is not recommended without prior approval of the appropriate medical service.

7.5 Key words.

Class
Grade
Low compression

7.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

Military interests:

Civil Agency Coordinating Activity:
GSA-FAS

Custodians:
Army – MR
Navy – AS
Air Force - 11

Preparing activity:
DLA - IS

(Project 9320-2012-012)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.