INCH-POUND

A-A-55762A
5 May 2011
SUPERSEDING
A-A-55762
13 September 1995

COMMERCIAL ITEM DESCRIPTION

RUBBER, SILICONE; STRIP, SHAPE 18

The General Services Administration has authorized the use of this Commercial Item Description for all Federal Agencies.

1. SCOPE. This commercial item description (CID) covers a silicone rubber strip of various classes and grades, with shape 18 (see figure 1).

2. CLASSIFICATION. The silicone rubber will be of the following classes and grades as specified. The designated grade number corresponds to the nominal Shore Durometer A hardness value.

Class 1A – Low temperature resistant
Grade – 40, 50, 60, 70, and 80

Class 1B – Low temperature resistant and low compression set at high temperature
Grade – 40, 50, 60, 70, and 80

Class 2A – High temperature resistant
Grade – 25, 40, 50, 60, 70, and 80

Class 2B – High temperature resistant and low compression set
Grade – 25, 40, 50, 60, 70, and 80

Class 3A – Low temperature, tear and flex resistant
Grade – 30, 50, and 60

Class 3B – Tear and flex resistant
Grade – 30, 50, 60, 70, and 80

Comments, suggestions, or questions on this document should be addressed to Defense Supply Center Philadelphia (DSCP), ATTN: DSCP-NASA, 700 Robbins Avenue, Philadelphia, PA 19111-5096 or e-mail to dscpg&inspecomments@dla.mil . Since contact information can change, you may want to verify the currency of this address information using ASSIST Online database at https://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Dimensional and physical requirements. Dimensional and physical requirements shall conform to figure 1. Dimensional tolerance shall conform to the applicable commercial tolerance specified in CID A-A-59588.

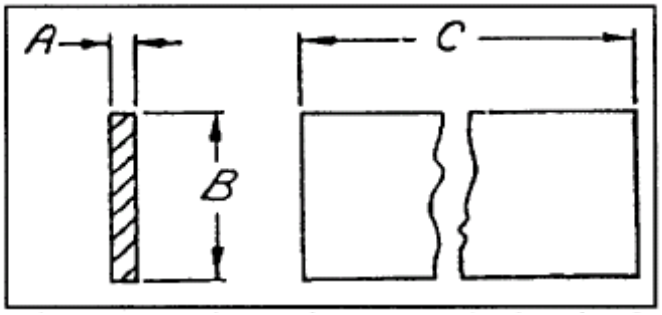

Figure 1. Dimensional and physical requirements.

Table I. Dash sizes and dimensions.

DASH SIZE	A WIDTH	B HEIGHT	C LENGTH	NHR MIN	NHR MAX	MIN TENSILE STRENGTH P.S.I	TEMP RATING ºF
001-C-5	0.015	0.400	9.8	45.0	55.0	700	-80 to 425
002-D-7	0.032	1.500	15.0	65.0	75.0	650	-80 to 425
003-A-5	0.031	2.000	3.0	45.0	55.0	700	-100 to 425
004-C-6	0.031	2.000	6.0	55.0	65.0	650	-80 to 425
005-C-5	0.047	0.750	25.0	45.0	55.0	700	-80 to 425
006-C-5	0.047	0.750	27.0	45.0	55.0	700	-80 to 425
007-C-5	0.047	0.750	73.0	45.0	55.0	700	-80 to 425
008-C-5	0.047	0.750	130.0	45.0	55.0	700	-80 to 425
009-C-5	0.750	0.750	198.0	45.0	55.0	700	-80 to 425
010-C-5	0.062	1.500	144.0	45.0	55.0	700	-80 to 425
011-D-4	0.062	3.000	6.0	35.0	45.0	700	-100 to 425
012-C-5	0.062	4.000	72.5	45.0	55.0	700	-80 to 425
013-B-*	0.090	0.500	1.5	35.0	75.0	600	-100 to 425
014-A-4	0.090	0.880	1.6	35.0	45.0	700	-100 to 425
015-C-5	0.090	1.880	13.5	45.0	55.0	700	-80 to 425
016-D-5	0.093	0.250	A/A	45.0	55.0	700	-80 to 425
017-A-4	0.125	0.550	6.6	35.0	55.0	700	-100 to 425
018-C-5	0.125	0.500	19.0	45.0	55.0	700	-80 to 425
019-D-4	0.125	0.500	54.3	35.0	45.0	700	-80 to 425
020-D-4	0.125	1.000	56.6	35.0	45.0	700	-80 to 425
021-D-4	0.125	1.000	63.3	35.0	45.0	700	-80 to 425
022-C-5	0.125	1.062	144.0	45.0	55.0	700	-80 to 425
023-F-3	0.250	0.500	66.0	25.0	35.0	1000	-94 to 400
**024-C-8	0.250	0.910	10.2	75.0	85.0	500	-100 to 425
025-C-5	0.250	2.000	34.2	45.0	55.0	700	-80 to 425
026-D-6	0.250	5.000	80.3	55.0	65.0	650	-80 to 425
027-C-5	0.375	0.625	A/A	45.0	55.0	700	-80 to 425
028-C-5	0.375	1.250	25.3	45.0	55.0	700	-80 to 425
029-D-4	0.375	2.000	14.3	35.0	45.0	700	-80 to 425

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

030-B-5	0.562	0.562	144.0	45.0 - 55.0	700	-100 to 425
031-E-5	0.750	0.250	72.0	45.0 - 55.0	1200	-100 to 425
032-E-3	0.750	5.000	1200.0	20.0 - 35.0	850	-130 to 400
034-F-6	4.000	0.063	8.0	55.0 - 65.0	1200	-94 to 400
035-B-5	0.730	0.078	5.7	45.0 - 55.0	700	-100 to 425
***036-F-3	0.080	0.375	180.0	25.0 - 35.0	1000	-94 to 400

* Grades 40 to 70 acceptable.
** Special features: 0.120 in X 45° chamfer on 4 corners.
*** Unless otherwise specified, color should be gray.

Notes: 1. Unless otherwise noted, dimensions are in inches.
2. NHR: Nonmetallic hardness rating, Shore Durometer A.
3. Minimum tensile strength in pounds per square inch.
4. Surface condition: Smooth both sides.
5. A/A – Any acceptable.

3.2 Material. Material shall be silicone rubber formulated and processed to meet the physical and mechanical properties per the specified class and grade, when tested in accordance with ASTM test methods specified in Table I of CID A-A-59588.

3.3 Color. Unless otherwise specified, the color of the silicone rubber shall be the natural color of the compound furnished.

3.4 Workmanship. The end product shall be clean, smooth finished, and free from dirt, flash or rough edges.

3.5 Marking. Unless otherwise specified (see ordering data), sheet material and strips (cut from sheet) shall be marked with the following information: Basic CID number, class, grade, designations, and the supplier's designations. The class and grade designations separated by a dash, shall be enclosed within parentheses. The markings shall be legible and placed in rows of constantly 5 inches apart. The supplier's designation (compound number) shall appear immediately below the constantly recurring description symbols. The symbols shall be legible and shall be not less than 3/8 inches high. The symbols shall be applied by suitable means, using a black colored marking fluid to mark white colored silicones and a white colored marking fluid to mark other than white colored silicones. The marking shall not be obliterated by normal handling or by the action of petroleum-based oils.

3.6 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of ASTM SI 10, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE.

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

7. NOTES.

7.1 Part identification number (PIN): the following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PINs to be used for items acquired to this description are created as follows: Basic CID number + dash size from Table I. Do not use unassigned dash size.

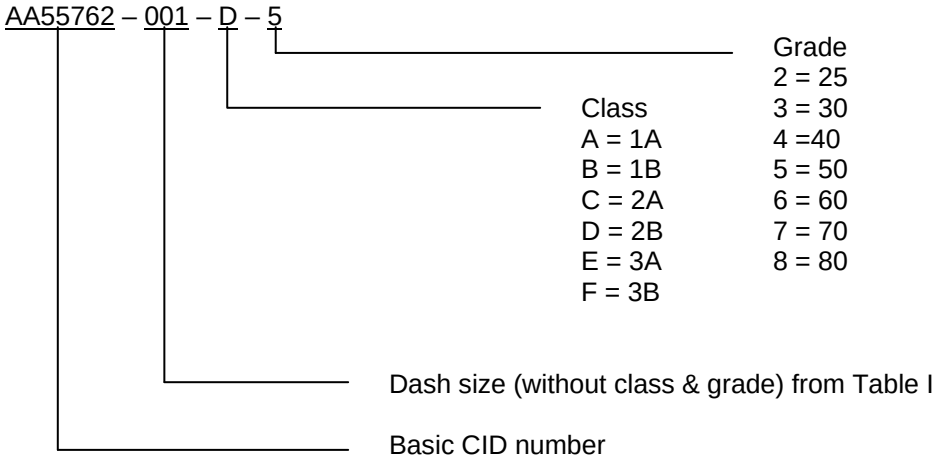

7.2 Ordering data. The contract or order should specify the following:

a. Title, number, and date of this CID.
b. Dash size from Table I.
c. Marking if different (see 3.5).
d. Packaging requirements.

7.3 Source of documents.

7.3.1 ASTM SI10 is available from the ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959 or online at http://www.astm.org .

7.3.2 FAR. The Federal Acquisition Regulation is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402 or online at http://www.arnet.gov/far .

7.3.3 Government documents. Federal and military documents are available online at https://assist.daps.dla.mil/quicksearch/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.

7.4 Utilization caution. Use of this material in items that may come in contact with human skin, food, or portable water is not recommended without prior approval of the appropriate medical service.

7.5 Key words.

Class
Flex resistant
Grade
Low compression

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.

7.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Military interests:

Custodians:
Army – MR
Navy – AS
Air Force - 11

Preparing activity:
DLA - IS

(Project 9320-2011-014)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:56Z
Check the source to verify that this is the current version before use.