INCH-POUND

MIL-DTL-83528/3D
15 November 2001
SUPERSEDING
MIL-G-83528/3C
10 July 1992

DETAIL SPECIFICATION SHEET

# GASKETING MATERIAL, CONDUCTIVE, SHIELDING GASKET, ELECTRONIC, ELASTOMER, EMI/RFI, SOLID "D" SHAPED STRIP

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-DTL-83528.

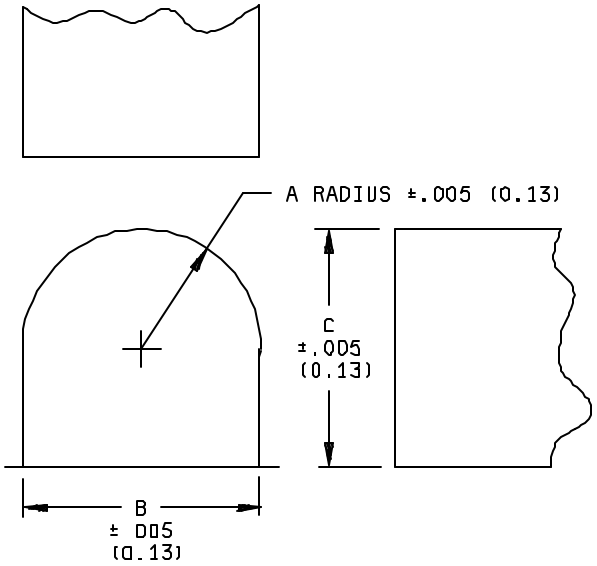


NOTES:
1. Dimensions are in inches; metric equivalents are given in parenthesis and are for general information only.
2. Tolerance on flash shall be ± .008 (0.20 mm) on the extension and ± .005 (0.13 mm) on the thickness.
3. Length shall be as specified on the purchase order.

FIGURE 1. EMI/RFI "D" shape strip gasket.


DISTRIBUTION STATEMENT A . Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and interface: See figure 1 and table I.

Material: Type A, B, C, D, E, F, H, J, K, L, or M.

Part or Identifying Number (PIN): See table I.

Supersession information: See table II.

TABLE I. Dimensions.

| PIN 1/ M83528/003X | Dimension A ± .005 2/ | Dimension B ± .005 2/ 3/ | Dimension C ± .005 2/ 3/ | Cross section 4/ area ($cm^2$) |
|---|---|---|---|---|
| 001 | .031 (0.78) | .062 (1.57) | .068 (1.73) | .025 |
| 002 | .047 (1.19) | .094 (2.39) | .078 (1.98) | .041 |
| 003 | .039 (0.99) | .078 (1.98) | .089 (2.26) | .041 |
| 004 | .047 (1.19) | .094 (2.39) | .094 (2.39) | .050 |
| 005 | .031 (0.78) | .062 (1.57) | .100 (2.54) | .037 |
| 006 | .075 (1.91) | .150 (3.81) | .110 (2.79) | .091 |
| 007 | .061 (1.55) | .122 (3.10) | .135 (3.43) | .097 |
| 008 | .059 (1.49) | .118 (3.00) | .156 (3.96) | .109 |
| 009 | .078 (1.98) | .156 (3.96) | .156 (3.96) | .140 |
| 010 | .089 (2.26) | .178 (4.52) | .175 (4.45) | .179 |
| 011 | .094 (2.39) | .188 (4.78) | .188 (4.78) | .203 |
| 012 | .125 (3.18) | .250 (6.35) | .250 (6.35) | .360 |

1/ "X" in the PIN shall be replaced by the applicable material type. Complete PIN example: M38528/003A001.
2/ Dimensions are in inches; metric equivalents are given in parenthesis and are for general information only.
3/ For dimensions over .200 the tolerance shall be ± .008.
4/ For calculation of volume resistivity (for reference only).

TABLE II. Supersession information.

| PIN 1/ M83528/003X | Superseded DESC drawing PIN 85104X 1/ |
|---|---|
| 001 | 002 |
| 002 | 003 |
| 003 | 004 |
| 004 | 010 |
| 005 | 005 |
| 006 | 006 |
| 007 2/ | 007 |
| 008 | 008 |
| 009 | N/A |
| 010 | 009 |
| 011 | 012 |
| 012 | 013 |

1/ "X" in the PIN indicates the applicable material type.
2/ Dimensions of this part are not identical to the superseded part. However, this is an authorized substitution.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.

Custodian:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Air Force – 19, 99
NSA – NS

Preparing activity:
DLA - CC

(Project 5999-0375-03)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:39Z
Check the source to verify that this is the current version before use.