INCH-POUND

MIL-PRF-83532/2B
AMENDMENT 1
10 November 1999

PERFORMANCE SPECIFICATION SHEET

DELAY LINES, 14-PIN DIP COMPATIBLE, 5 TAP

This amendment forms a part of MIL-PRF-83532/2B, dated 30 December 1991, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 5

Output rise time, delete "(applied to leading and trailing edge)" and substitute "(applied to leading edge only): "

Output rise time (applied to leading edge only), delete and substitute:

"5 ns maximum. Measurement conditions (-55°C ≤ T_C ≤ +125°C): V_{CC} = 5.0 V dc; T_{RI} ≤ 3 ns. The load circuit shall be as follows (C_L includes probe and test fixture capacitance):

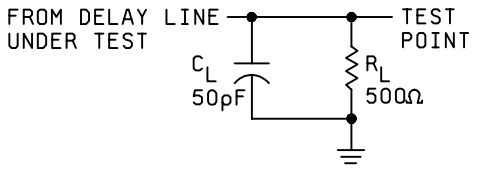

"

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5999-0358)

Review activities:
Navy - AS, CG, MC, SH
Air Force - 19, 99

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T08:42Z
Check the source to verify that this is the current version before use.