MIL-A-45941(WC)

7 December 1971

SUPERSEDING
(See Section 6)

MILITARY SPECIFICATION

ARMAMENT SUBSYSTEM, HELICOPTER, 7.62MM
MACHINE GUN: DOOR MOUNTED, LIGHT WEIGHT, M23
(Less M60D Machine Gun)

1. SCOPE

1.1 This specification covers one type light weight armament subsystem providing two pintle mounted 7.62mm, M60D machine guns for right hand and left hand door installation on UH-1D type helicopter.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-P-116	-	Preservation, Methods of.
MIL-I-6866	-	Inspection, Penetrant Method of.
MIL-I-6868	-	Inspection Process, Magnetic Particle.
MIL-W-8604	-	Welding of Aluminum Alloys; Process for.
MIL-W-8611	-	Welding, Metal Arc and Gas, Steel, and Corrosion and Heat Resistant Alloys; Process for.
MIL-W-13855	-	Weapons, Small Arms and Aircraft Armament Subsystems, General Specification for.
MIL-I-45607	-	Inspection Equipment, Acquisition, Maintenance and Disposition of.

STANDARDS

Military

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-109	-	Quality Assurance Terms and Definitions.
MIL-STD-1261	-	Welding Procedures for Constructional Steels.

FSC 1005

Source: https://assist.dla.mil -- Downloaded: 202640-22T04:24Z
Check the source to verify that this is the current version before use.

DRAWINGS

U.S. Army Weapons Command		
D11699747	-	Armament Subsystem, Helicopter, 7.62mm Machine Gun: Door Mounted, Light Weight, M23
IEL11013166	-	Index of Inspection Equipment Lists

(Product drawings referenced in this specification are specified on Drawing D11699747 and related assembly drawings; acceptance inspection equipment drawings form a part of Drawing IEL11699747.)

PUBLICATIONS

U.S. Army Weapons Command		
P8428049	-	Packaging Data Sheet for Armament Subsystem, Helicopter: M23

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article. Requirement for submission of the first article shall be as specified in the contract (see 6.1). Unless otherwise specified (see 6.1), first article shall include the pilot pack (see 5.1).

3.2 Materials and construction. The armament subsystem and parts shall conform to the materials and construction requirements specified herein, on Drawing D11699747 and drawings applicable thereto, and shall be in accordance with the applicable materials and construction provisions of MIL-W-13855.

3.3 Design. The armament subsystem and parts shall conform to the design specified herein, on Drawing D11699747 and drawings applicable thereto, and shall be in accordance with the applicable design provisions of MIL-W-13855.

3.3.1 Welding.

3.3.1.1 Certification of welding. Unless otherwise specified (see 6.1), prior to production of any weldments, the contractor or manufacturer shall have Government approval of welding procedures and test specimens. Welding of parts and subassemblies shall be in accordance with the applicable drawing and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T04:24Z
Check the source to verify that this is the current version before use.

3.3.1.2 Welded joints. All welded joints of parts and subassemblies shall be sound and free from cracks. Welded joints shall be magnetic particle inspected in accordance with MIL-I-6868 and penetrant inspected in accordance with MIL-I-6866 as applicable.

3.3.2 Pintle and pintle post assembly.

3.3.2.1 Pintle. The pintle shall assemble in the pintle post and be retained in the pintle post by ball bearings. The pintle shall rotate throughout its full range of travel without binding.

3.3.2.2 Pintle post. The pintle post shall assemble in the base mount assembly for either right or left side door mounting, and be securely attached so that there shall be no relative movement. Welding of the pintle post assembly shall be in accordance with MIL-W-8611.

3.3.3 Ammunition box and cover assembly. The ammunition box shall readily assemble to and disassemble from the ammunition box brackets on the base mount assembly, and when assembled shall be securely retained in place by the latches. The cover assembly shall readily assemble to the ammunition box and the latches be snapped securely in place so that there be no relative movement and can be manually removed by hand pressure.

3.3.4 Empty cartridge bag. The empty cartridge bag shall be capable of being retained and removed from the cartridge bag frame assembly.

3.3.5 Empty cartridge bag frame assembly. The empty cartridge bag frame assembly shall be capable of being attached to and removed from the weapon. The latch shall move freely through its full range of travel without binding, and when released is returned to its original position by spring action. Welding of the cartridge bag frame shall be in accordance with MIL-STD-1261.

3.3.6 Ammunition chute and brace assembly. The ammunition chute with the brace assembly shall chute linked ammunition from the ammunition box to the weapon, and shall be capable of being manually assembled to and disassembled from the ammunition box and the weapon by the end fittings.

3.3.7 Base mount assembly. The base mount assembly shall be capable of being assembled with pintle post, ammunition box, and forward and aft beam for either right or left door mounting. Welding of the base mount shall be in accordance with MIL-W-8604.

3.3.8 Endurance. The armament subsystem shall have a 90% probability of firing 10,000 rounds, and withstanding 100 cycles of rough handling without malfunctions, unserviceable parts or cracking of welded joints with a 10% confidence level. Testing shall be as specified in 4.4.2.3 and 4.6.1. A malfunction is defined as one which a failure of the mount or a component of the mount precludes further firing without replacement or repair of the mount or component of the mount.

Source: https://assist.dla.mil -- Downloaded: 20260410-22T04:24Z
Check the source to verify that this is the current version before use.

3.3.9 Interchangeability. Unless otherwise specified on the drawings, all parts shall be interchangeable. (In normal assembly operations there shall be no objections interposed to preferential assembly of parts provided that all parts are dimensionally acceptable.) Armament subsystems and repair parts shall be capable of meeting the interchangeability test. Testing shall be as specified in 4.4.3.3 and 4.6 2.

3.3.10 Targeting. The armament subsystem with M60D machine gun assembled to both right hand mount and left hand mount shall meet the target requirements defined in Figures 1a, 1b, 2a and 2b (see 4.4.2.2 5).

3.4 Marking. Each armament subsystem shall be clearly marked in accordance with the applicable drawings and MIL-W-13855.

3.5 Workmanship. Workmanship shall be in accordance with the workmanship requirements of MIL-W-13855.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality assurance terms and definitions. Quality assurance terms and definitions used herein are in accordance with MIL-STD-109.

4.3 First article inspection. The first article shall be selected from early production and submitted for testing in accordance with the contract requirements (see 6.1). The first article shall be representative of production processes to be used during quantity production. The first article shall be inspected and tested for all requirements specified herein.

4.4 Quality conformance inspection.

4.4.1 Inspection lot. The formation, size, and presentation of inspection lots of armament subsystems, parts, and packaging shall be in accordance with MIL-STD-105. Inspection lots shall be as large as practicable in consideration of quality history, manufacturing conditions, and contractor's delivery schedule, and within the limitations of MIL-W-13855. Armament subsystems shall be assembled from lots of component parts that have met all inspection requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 202640-22T04:24Z
Check the source to verify that this is the currenversion before use.

4.4.2 Examination.

4.4.2.1 Component parts and concurrent repair parts. Examination of component parts and concurrent repair parts shall be performed in accordance with the criteria specified in the contract (see 6.1). The contractor's examination of these parts shall be accomplished prior to their assembly into the end item or submission for acceptance as repair parts.

4.4.2.2 Armament subsystem. Final examination of armament subsystems shall be performed after completion of all testing and just prior to preservation and packaging. Unless otherwise specified herein, each armament subsystem shall be examined as specified below. Each step in the examination shall include a visual examination for proper cleaning and presence of the specified protective coating and to determine the general quality, completeness of manufacture, assembly, clarity and legibility of markings and workmanship. Armament subsystems failing to meet the requirements shall be rejected.

4.4.2.2.1 Pintle post assembly.

a. Manually examine the pintle to assure that it is retained in the bearing by the ball bearings and that it can be manually rotated throughout its full range of travel.

b. Visually examine to assure the ball bearing retaining set screw is securely staked in place.

c. Manually examine the stowage cradle to assure that it is securely retained on the pintle post assembly by the bolts and nuts and shall move throughout its full range of travel without binding.

d. Visually and manually examine all welded joints of the pintle post assembly to assure secure or missing welds.

e. Manually examine the sleeve spacer to assure it is securely retained in place.

4.4.2.2 2 Ammunition boxes.

a. Manually examine the ammunition boxes to assure they readily assemble to and disassemble from the ammunition box brackets on the base mount and when assembled are securely retained in place by the latches.

b. Visually and manually examine the decals to assure they are securely applied to the boxes as specified on the applicable drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:24Z
Check the source to verify that this is the current version before use.

c. Manually examine the cover assemblies to assure they can be snapped securely in place so that there shall be no relative movement and can be manually removed by hand pressure.

d. Manually examine the cover assembly handles to assure they can rotate freely without binding when finger pressure is applied.

e. Visually and manually examine the cover windows to assure they are securely applied to the covers as specified on the applicable drawing.

f. Visually and manually examine all riveted joints to assure secure riveting and that there is no relative movement of the riveted parts.

4.4.2.2.3 Empty cartridge bag.

a. Visually and manually examine the empty cartridge bag to assure that the latch moves freely throughout its full range of travel and when released is returned to its original position by spring action.

b. Visually and manually examine all welded joints of the cartridge bag frame assembly to assure secure or missing welds.

4.4.2.2.4 Ammunition chute and chute brace assembly.

a. Manually examine the ammunition chute end fitting locking pins to assure they are capable of being manually depressed to flush or below the pin housing tube and when released are returned to the free length position under spring action.

b. Manually examine the ammunition chute end fitting latches to assure they are capable of being depressed by finger pressure and when released are returned to the latch position under spring action.

c. Manually examine the chute brace assembly to assure it is capable of being assembled to and disassembled from the ammunition chute and when assembled is securely retained on the ammunition chute without buckling the chute.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:24Z
Check the source to verify that this is the current version before use.

4.4.2.2.5 Armament subsystem assembly.

a. Visually and manually examine all welded joints to assure secure or missing welds.

b. Examine assembleability of the machinegun to the pintle post assembly using approved inspection equipment that simulates the maximum mounting conditions of the M60D machinegun.

c. Using a Government standard M60D machinegun, and equipment as depicted on Figures 1a, 1b, 2a and 2b, examine to assure that the elevating and traversing limits of the armament subsystem are within the requirements indicated on Figures 1a, 1b, 2a and 2b as applicable for right and left hand mount assemblies. Control of components shall be exercised to meet these limits.

4.4.2.3 Packaging. Examination of packaging of armament subsystems shall be performed in accordance with the classification of defects and acceptable quality levels (AQL's) specified in 4.4.2.3.1. Sample size shall be in accordance with MIL-STD-105, using inspection level I. The following provisions shall apply:

a. The AQL's are specified as percent defective.
b. The AQL listed for each defect shall be applied to the individual defect, not to a group of defects.
c. Examination for packaging defects specified in 4.4.2.3.1 shall apply to each item of the applicable sample of armament subsystems, interior packages, or exterior containers, as applicable.

4.4.2.3.1 Classification of defects for packaging. (Unless otherwise specified in each listed defect, the packaging requirements are specified on Packaging Data Sheet P8428049).

Categories	Defect	AQL
Critical:	None defined.	
Major:		
101	Illegible or incorrect marking.	1.0
102	Improper loaction of marking.	1.0
103	Improper level of packaging or packing (see procurement documents).	1.0
104	Inadequate cleaning and drying.	1.5
105	Improper preservation application.	1.5
106	Improper closure of unit package.	1.5
Minor:	None defined.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:24Z
Check the source to verify that this is the current version before use.

4.4.2.4 Armament subsystems which have passed all examinations after successful completion of testing shall be stamped with the Department of Defense complete inspection approval stamp on each of the base assemblies next to the pintle post assembly holes. The Government representative will control the stamps used for such stampings and observe the stamping operations as required to assure successful completion of all required examination and tests.

4.4.3 Testing.

4.4.3.1 Failure data. Unless otherwise specified herein, all tests shall be conducted on a complete armament subsystem exclusive of Government Furnished Property. If test requirements cited herein are not met, acceptance of the subsystem shall be deferred and the contractor shall accomplish as applicable, the following actions:

a. Conduct a failure analysis study performing a dimensional physical and visual examination of the components which are suspected to be the cause of failure or malfunction.

b. Evaluate and correct the applicable production processes and procedures to prevent recurrence of the same defect(s) in future production.

c. Examine subsystems, partially assembled subsystems and components (including components and subassemblies at in-process or final assembly) to insure that material containing the same defect is purged from the inventory and not presented to the Government for acceptance.

d. Upon instructions from USAWECOM, ATTN: AMSWE-QA, resume testing of the subsystem or retest an additional subsystem from the same lot.

4.4.3.2 Endurance testing.

4.4.3.2.1 Lot size. The endurance test lot shall consist of 50 armament subsystems.

4.4.3.2.2 Procedure. One mount assembly (one-half of the armament subsystem) selected by the Government representative from each endurance test lot shall be tested by the contractor using the test method specified in 4.6.1. Mount assemblies selected for the endurance test may be either left hand mounts or right hand mounts and shall be a representative of all armament subsystems produced. If the endurance requirements of 3.3.8

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:24Z
Check the source to verify that this is the current version before use.

are not met, acceptance of armament subsystems shall be deferred and the contractor shall perform the corrective actions as specified in 4.4.3.1. The Government representative shall varify the results of failure analysis and assure that corrective action, as applicable, has been accomplished. Malfunctions attributable to the machinegun, ammunition or links shall not be counted against the armament subsystem being tested, however, such malfunctions shall be recorded.

4.4.3.3 Interchangeability testing.

4.4.3.3.1 Armament subsystems. The contractor shall subject three armament subsystems selected by the Government representative from each 25 armament subsystems produced, for interchangeability, using the test method specified in 4.6.2. Armament subsystems taken for interchangeability shall have been found satisfactory in all other examinations and tests. The three armament subsystems shall be examined for and shall comply with the requirements for elevating and traversing limits specified in 3.3.10 before and after interchange of parts. Failure of the armament subsystems to meet the requirements specified in 3.3.9 and 3.3.10 shall cause rejection of the represented lot.

4.4.3.4 Component parts and concurrent repair parts testing. Raw material testing, part testing, and certification shall be performed in accordance with the criteria specified in the contract (see 6.1). This will include chemical analysis and physical tests of materials, and tests of protective finish, heat treatment, bonding, and function of parts as applicable. The contractor shall accomplish these tests prior to assembly of parts into the end item.

4.4.3.5 Packaging testing. The contractor shall furnish the Government representative with certification that the packaging materials conform to the applicable packaging data sheets and specifications.

4.4.3.5.1 Determination of cleanliness testing. The contractor shall test items from each inspection lot for determination of cleanliness using the test method specified in 4.6.3.1. Sampling shall be in accordance with MIL-P-116.

4.4.3.5.2 Heat-sealed seam and vacuum retention testing. The contractor shall test level A unit packages from each inspection lot for heat-sealed seam and vacuum retention using the test methods specified in 4.6.3.2 and 4.6.3.3 respectively. Sampling shall be in accordance with MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:24Z
Check the source to verify that this is the current version before use.

4.4.3.5.3 Repair parts. Testing of packaging of repair parts shall be performed in accordance with the criteria specified in the contract (see 6.1).

4.5 Inspection equipment. Unless otherwise specified in the procurement documents (see 6.1), responsibility for acquisition, maintenance and disposition of measuring and testing equipment prescribed on lists contained on the Index of Inspection Equipment Lists, Drawing IEL11013166 and for all other inspection equipment required to perform inspection required by applicable specifications, shall be in accordance with MIL-I-45607.

4.6 Test method.

4.6.1 Endurance test. Testing of armament subsystems for endurance shall be accomplished with the mount assembly attached to a fixture simulating the mounting structure of the helicopter. A Government standard M60D machinegun shall be used for the test (see 6.1). Ammunition used for the test shall be Government standard 7.62mm M59 or M80 ball cartridges linked with Government standard 7.62mm M13 links (see 6.1).

4.6.1.1 A total of 10,000 rounds shall be fired from the test mount assembly regardless of the number of malfunctions or unserviceable parts requiring replacement in order to complete the test.

4.6.1.2 The ammunition (550 rounds) shall be loaded into the ammunition box with a Government standard 7.62mm dummy inert cartridge separating each 100 rounds. The ammunition shall be fed from the ammunition box to the machinegun through the chuting. One end of the chuting shall be attached to the ammunition box and the other end shall be attached to the machinegun using the ammunition chute adapter. The empty cartridge bag shall be attached to the machinegun to catch and retain the fired cartridge cases and links.

4.6.1.3 Firing shall be accomplished in 200 round series. The first 100 rounds of each series shall be fired in interrupted bursts with at least 10 intentional breaks in firing. The second 100 rounds of each series shall be fired in one continuous burst.

4.6.1.4 In addition to the firing, the armament subsystem shall be tested for rough handling by placing the mounted machinegun with the ammunition chuting attached in the maximum position of depression (muzzle in the lowest position without engaging the stowage cradle). From this position, the machinegun shall be released and allowed to fall of its own weight throughout the full range of travel on the mount assembly. This shall be accomplished twice following each 200 round series.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:24Z
Check the source to verify that this is the current version before use.

4.6.1.5 The machinegun shall be cooled to ambient temperature after each 200 rounds of firing using cooling aids other than water. The machinegun may be cleaned and oiled after each 2,000 rounds of firing. At the close of each day's firing, the machinegun and mount assembly shall be protected against corrosion.

No mount assembly parts shall be altered and only parts broken or worn to the extent that they are unserviceable shall be replaced.

4.6.1.6 Welded joints of the mount assembly shall be checked for cracks using the magnetic particle inspection process in accordance with MIL-I-6868 and penetrant inspection process in accordance with MIL-I-6866 as applicable before and after the endurance test.

4.6.1.7 Complete accurate records shall be kept for each endurance test, showing each malfunction and part replacement including the number of the round at which each occurred and corrective action taken.

4.6.1.8 Disposition of the endurance tested mount assemblies shall be as specified in the contract (see 6.1).

4.6.2 Interchangeability test. Armament subsystems shall be tested for interchange of parts by disassembling and then reassembling parts using the parts and pre-arranged system specified below. Interchange of parts shall be accomplished by dividing the parts of each armament subsystem into three groups of non-mating parts as shown below and distributing the groups into three different trays until each tray contains parts for a complete armament subsystem. Groups of parts from the first armament subsystem shall be taken in order and placed in trays 1 through 3; groups of parts from the second armament subsystem shall be taken in order and placed in trays 2,3, and 1; groups of parts from the third armament subsystem shall be taken in order and placed in trays 3, 1, and 2. Commercial parts such as screws, spring pins, etc., shall be placed in the same tray as their mating or associate part. Any commercial part tendered unserviceable by disassembly shall be replaced without penalty to the interchangeability test. The armament subsystems shall be reassembled using only those parts which are in the same tray.

Groups of non-mating parts

Group I	Group II
Base assembly, mount (11699733)	Cradle, stowage (11699722)
Setscrew (11699670)	Nut, pintle post (11699724)
Spacer, sleeve (11699725)	Pintle, gun mount (11699721)

Group III

Beam, aft (11699728)
Beam, forward (11699727)
Post subassembly, pintle (11699806)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:24Z
Check the source to verify that this is the current version before use.

4.6 3 Packaging tests.

4.6.3.1 Determination of cleanliness. The surfaces of each sample unit shall be subjected to the determination of cleanliness test specified in MIL-P-116, except that the wipe test shall not be applicable to parts with black oxide or anodized protective coatings.

4.6.3.2 Heat-sealed seam. The sample level A unit packages shall be subjected to the heat-sealed seam test specified in MIL-P-116.

4.6.3.3 Vacuum retention. A sufficient vacuum shall be drawn to cause the flexible barrier of level A unit packages to cling snugly to the enclosed item. Care shall be exercised to insure that an excessive amount of vacuum is not applied which might cause puncture or rupture of the barrier.

4.6.3.3.1 Interpretation of results. After remaining undisturbed at room temperature for two hours, the barrier shall be examined to determine whether it is still taut and retracts against the item when drawn away and quickly released.

5. PREPARATION FOR DELIVERY

5.1 Pilot pack. A pilot pack consisting of complete and packed unit, packaged and packed in accordance with Packaging Data Sheet P8428049 to the level of protection specified in the contract (see 6.1) and forwarded as specified in 3.1.

5.2 Preservation, packaging, packing and marking. The armament subsystem with equipment shall be preserved, unit packaged, packed and marked in accordance with the requirements of Packaging Data Sheet P8428049 for the level of protection specified (see 6.1).

5.3 Repair parts. Repair parts shall be prepared for delivery in accordance with the applicable packaging data sheets specified in the contract (see 6.1).

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Lists of drawings and specifications pertinent to the armament subsystem, showing applicable revision dates.
c. Inspection criteria for components (see 4.4.2.1).
d. Index to inspection equipment list pertinent to the armament subsystem showing applicable revision dates.

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:24Z
Check the source to verify that this is the current version before use.

e. Number of first article samples required (see 3.1).
f. That packages opened for examination shall be repackaged by the contractor at the contractor's expense.
g. Disposition of endurance tested mounts (see 4.5.9.6).
h. Shipping instructions for first article and pilot pack if different (see 3.1 and 5.1).
i. Selection of applicable levels of preservation, packaging, and packing (see 5.1 and 5.2).
j. Packaging instructions for repair parts (see 5.3).
k. Place of final inspection and acceptance (see "Notes" in MIL-W-13855).
l. List of acceptance inspection equipment to be furnished the contractor and responsibilities for other Government property to be furnished the contractor (see 4.5 and 6.8).
m. Responsibilities for furnishing ammunition, links and machinegun (see 4.6.1).
n. Certification of welding procedures and test specimens if different (see 3.3.1).
o. Procedures and methods for demilitarizing and disposing of rejected material.
p. Disposition of Government furnished property.
q. Responsibility for test firing facilities and operating procedures (see 6.2).

6.2 Test firing facilities and operating procedures shall be designed by the contractor in conformance with local, state, and federal regulations and suitable for carrying out prescribed firing tests with safety of operating and visiting personnel. Copies of these contractor designs shall be forwarded to the contracting officer. Government facilities may be viewed upon application to the contracting officer.

6.3 When action by a testing agency is required, work programing will be effected with the testing agency at the earliest practicable date.

6.4 To avoid delay in test firing, the contractor should maintain a minimum of two months' supply of ammunition as determined by anticipated firing requirements.

6.5 Contract data requirements. Monthly reports of the results of final examination, endurance test and interchangeability tests shall be specified for delivery on the DD Form 1423 included in the contract.

6.6 Supersession data. This specification includes the requirements of Springfield Armory Purchase Description SAPD-284A, dated 6 August 1965.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:24Z
Check the source to verify that this is the current version before use.

6.7 When warranted, the contract should specify the application of MIL-Q-9858 or MIL-I-45208, as appropriate, on the Management Control Systems Summary List, DD Form 1660.

6.8 Unless otherwise specified (see 6.1 i), the contract should specify the application of MIL-I-45607 and MIL-C-45662 on the Management Control Summary List, DD Form 1660.

Custodians:
Army - WC

Preparing activity:
Army - WC

Project number:
1005-A423

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:24Z
Check the source to verify that this is the current version before use.

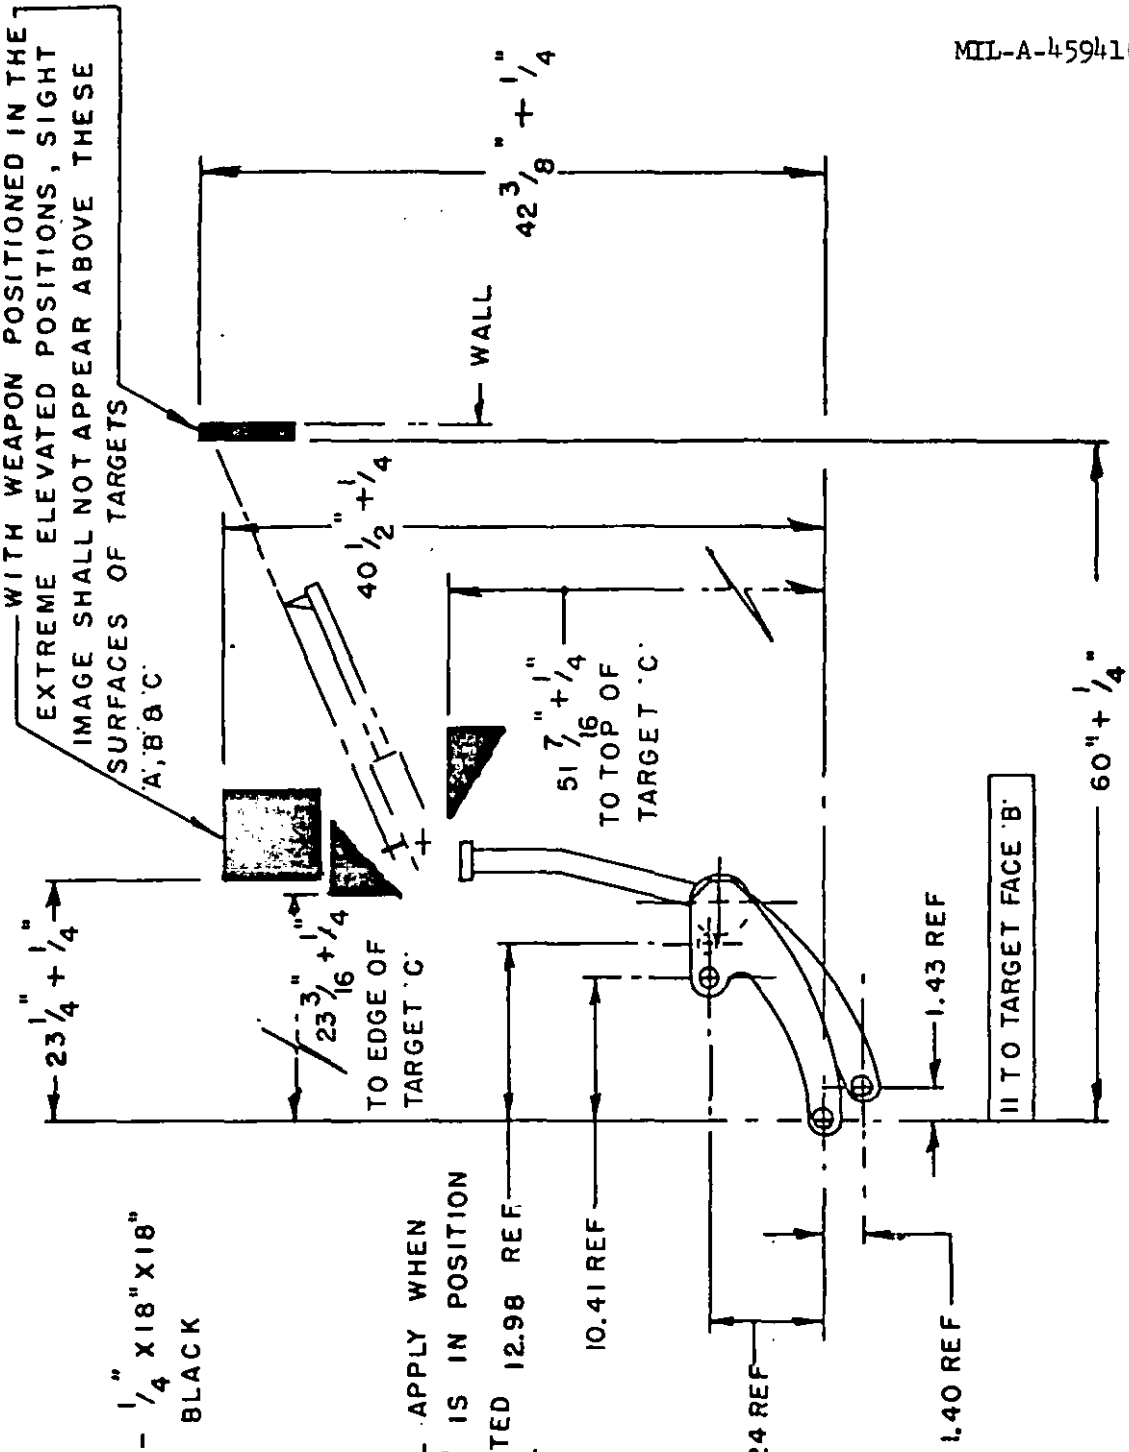


Figure 1a. Right hand mount- Elevating and traversing limits.

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:24Z
Check the source to verify that this is the current version before use.


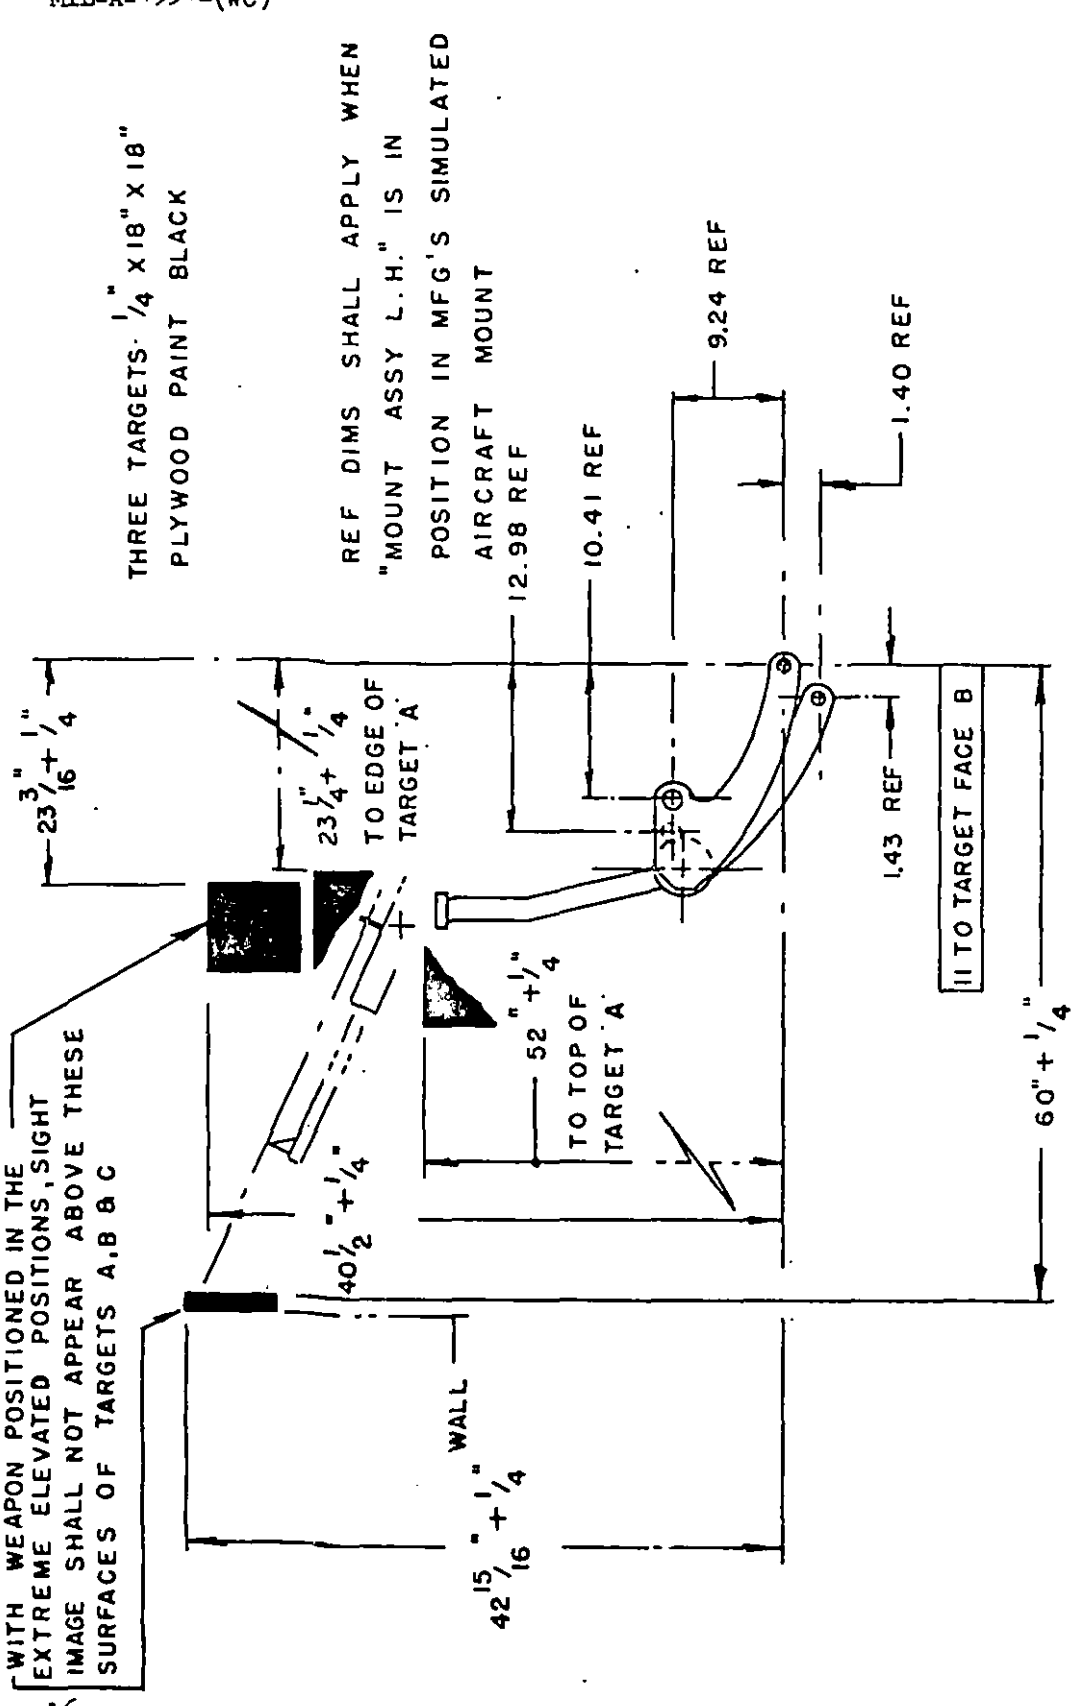


Figure 2a. Left hand mount - Elevating and traversing limits.

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:24Z
Check the source to verify that this is the current version before use.

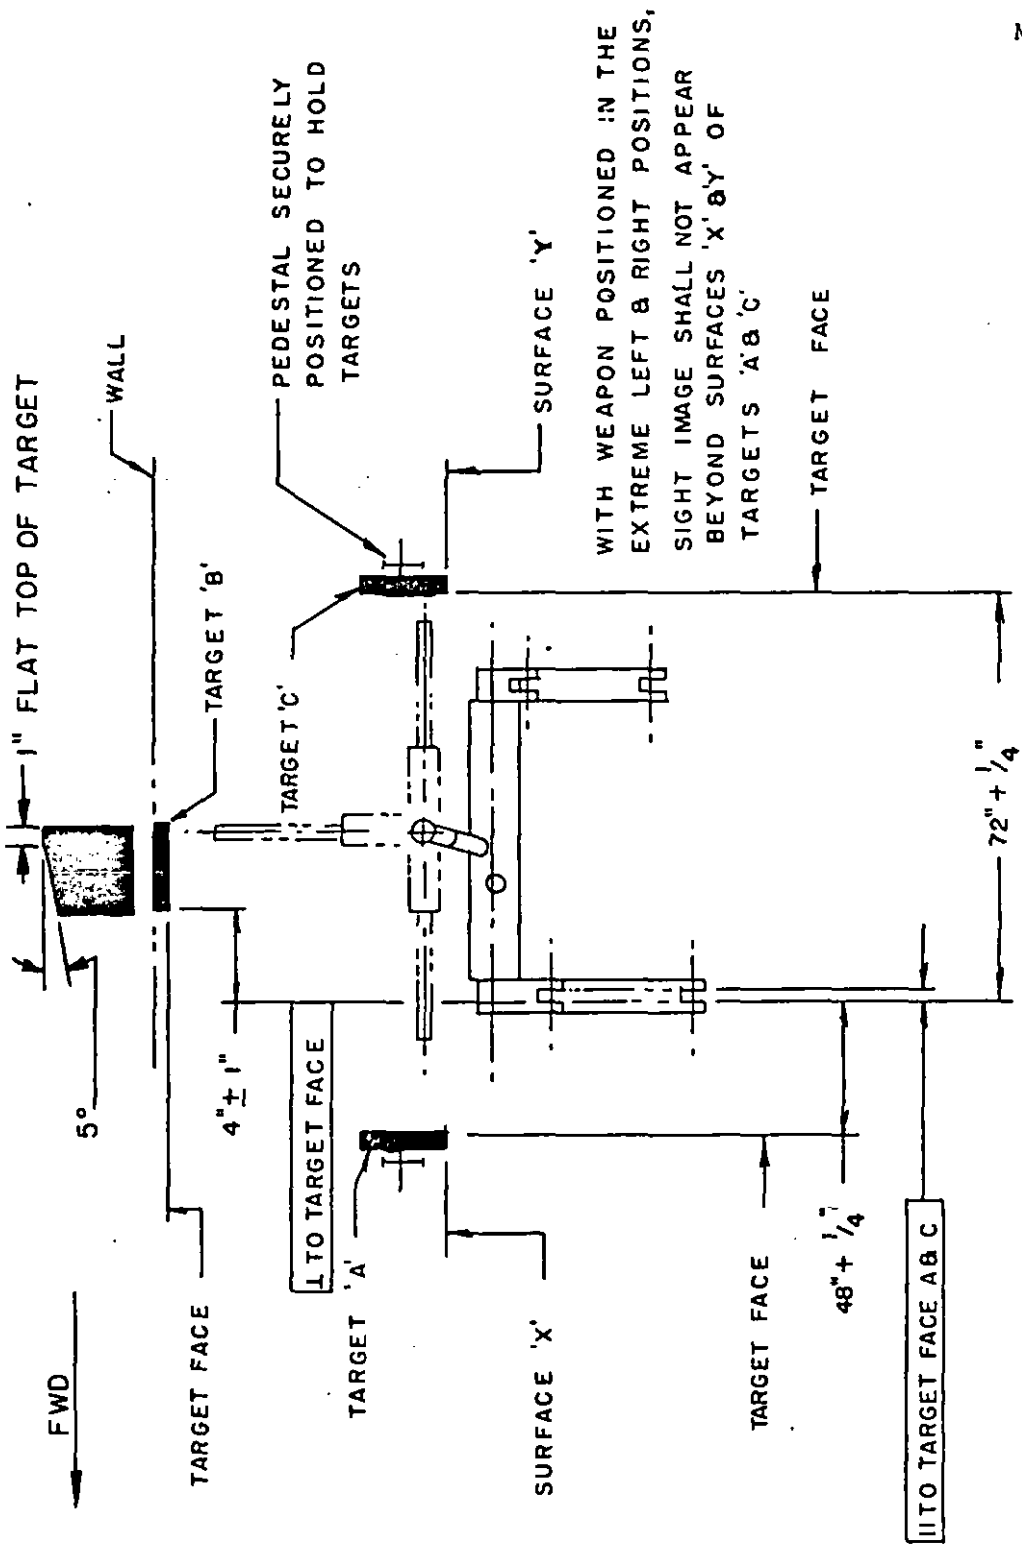

TARGET LOCATIONS - WHEN "MOUNT ASSY L.H." IS IN POSITION IN MFG'S SIMULATED AIRCRAFT MOUNT

Figure 2b. Left hand mount - Elevating and traversing limits.

Source: https://assist.dla.mil -- Downloaded: 202640-22T04:24Z
Check the source to verify that this is the current version before use.

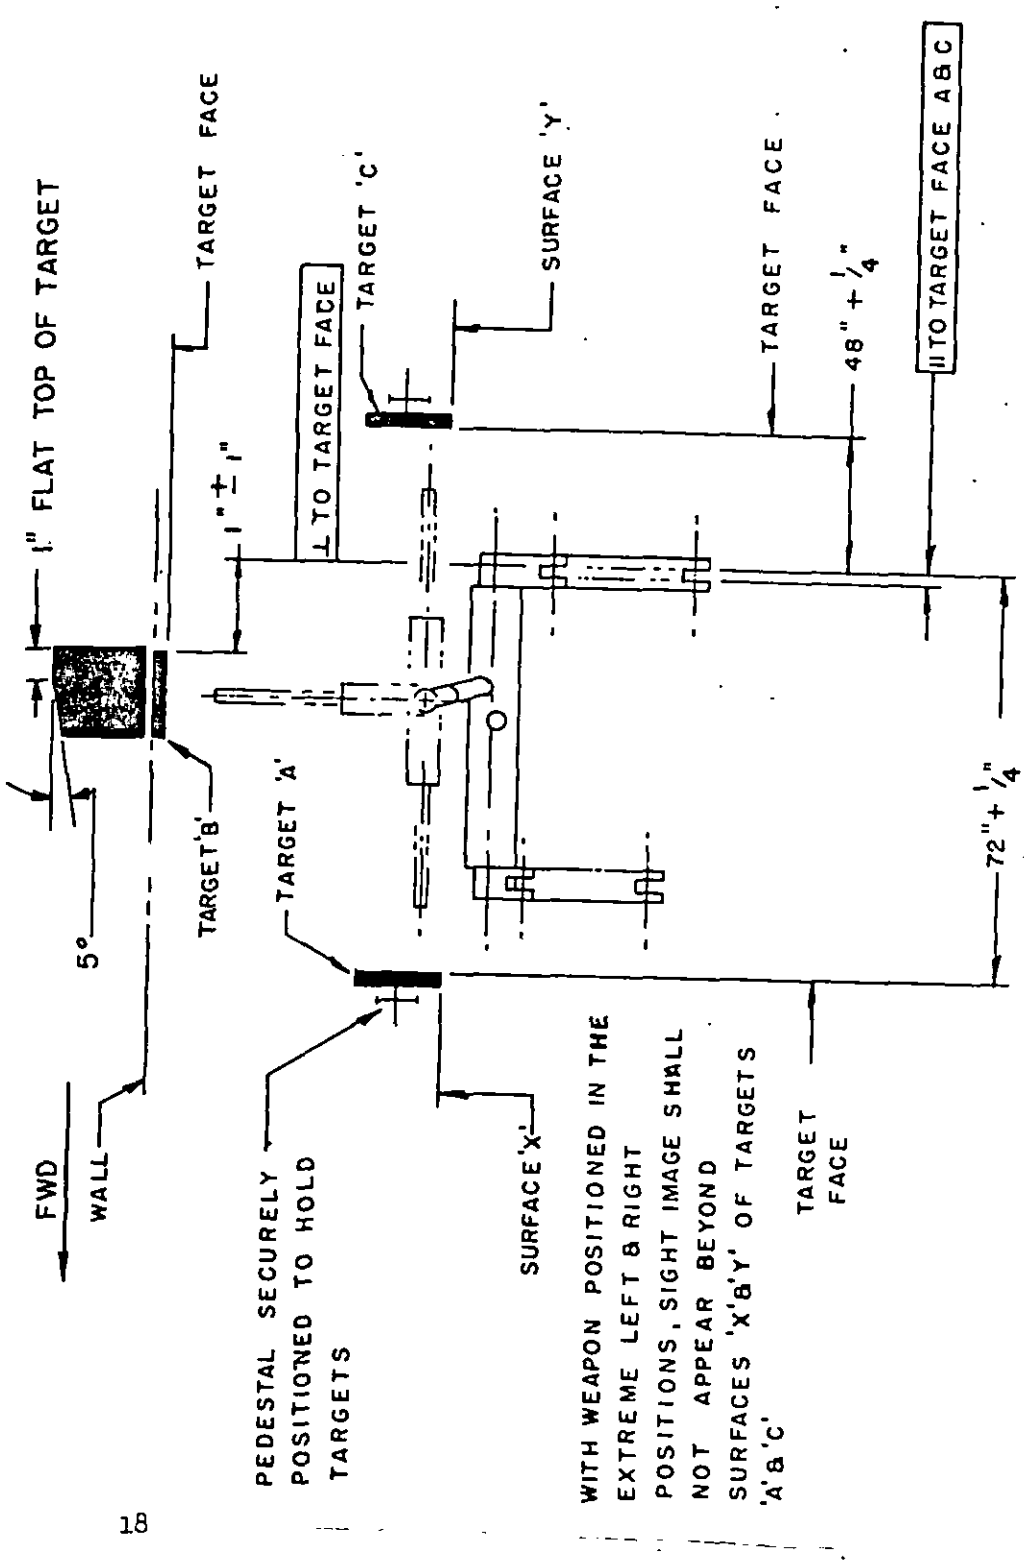


Figure 1b. Right hand mount - Elevating and traversing limits.

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:24Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 68 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:24Z
Check the source to verify that this is the current version before use.