11 May 1972
SUPERSEDING
(See Section 6)

MILITARY SPECIFICATION

# ARMAMENT SUBSYSTEM, HELICOPTER, 7.62MM MACHINE GUN: RAMP MOUNTED, LIGHT WEIGHT, M41 (Less M60D Machine Gun)

## 1. SCOPE

1.1 This specification covers one type light weight armament subsystem providing a pintle mounted 7.62mm, M60D machine gun for ramp installation on CH-47A heilcopter.

## 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

| Military | | |
|---|---|---|
| MIL-P-116 | - | Preservation, Methods of. |
| MIL-I-6866 | - | Inspection, Penetrant Method of. |
| MIL-I-6868 | - | Inspection Process, Magnetic Particle. |
| MIL-W-8611 | - | Welding, Metal Arc and Gas, Steels and Corrosion and Heat Resistant Alloys; Process for. |
| MIL-W-12332 | - | Welding, Resistance, Spot, Seam and Projection, For Fabrication Assemblies of Low Carbon Steel. |
| MIL-W-13855 | - | Weapons, Small Arms and Aircraft Armament Subsystems, General Specification for. |
| MIL-I-45607 | - | Inspection Equipment, Acquisition, Maintenance and Disposition of. |

FSC 1005

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

STANDARDS

| | | |
|---|---|---|
| Military | | |
| MIL-STD-105 | - | Sampling Procedures and Tables for Inspection by Attributes. |
| MIL-STD-109 | - | Quality Assurance Terms and Definitions. |
| MIL-STD-1261 | - | Welding Procedures for Constructional Steels. |

DRAWINGS

| | | |
|---|---|---|
| U.S. Army Weapons Command | | |
| D8436675 | - | Mount, Machine Gun, Rear Ramp. |
| IEL8436675 | - | Index of Inspection Equipment List. |

(Part drawings referenced in this specification form a part of Drawing D8436675; Inspection equipment drawings form a part of Drawing IEL8436675.)

PUBLICATIONS

| | | |
|---|---|---|
| Military | | |
| P8436598 | - | Packaging Data Sheet for Armament Subsystem: Helicopter, 7.62MM Machine Gun: Ramp Mounted, Light-Weight, M41, W/E. |

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions shall be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 First article. Requirement for submission of the first article shall be as specified in the contract (see 6.1). Unless otherwise specified (see 6.1), the first article shall include the pilot pack (see 5.1).

3.2 Materials and construction. The armament subsystem and parts shall conform to the materials and construction requirements specified herein, on Drawing D8436675 and drawings applicable thereto, and shall be in accordance with the applicable materials and construction provisions of MIL-W-13855.

3.3 Design. The armament subsystem and parts shall conform to the design specified herein, on Drawing D8436675 and drawings applicable thereto, and shall be in accordance with the applicable design provisions of MIL-W-13855.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

3.3.1 Welding.

3.3.1.1 Certification of welding. Unless otherwise specified (see 6.1), prior to production of any weldments, the contractor or manufacturer shall have Government approval of welding procedures and test specimens. Welding of parts and subassemblies shall be in accordance with the applicable drawing and as specified herein.

3.3.1.2 Welded joints. All welded joints of parts and subassemblies shall be sound and free from cracks. Welded joints shall be magnetic particle inspected in accordance with MIL-I-6868 and penetrant inspected in accordance with MIL-I-6866 as applicable.

3.3.2 Gun mount assembly.

3.3.2.1 Post assembly. The post assembly shall be capable of assembly to the rear ramp mount of the aircraft and be securely attached to the rear ramp mount by the two (2) mounting pins and the quick release pin. Welding of the post assembly shall be in accordance with MIL-W-8611.

3.3.2.1.1 Cams and stops. The post assembly shall incorporate mechanical cams and stops to preclude firing of the weapon into any part of the aircraft.

3.3.2.2 Quick release pin. The quick release pin shall readily assemble to and disassemble from the rear ramp mount of the aircraft, and when assembled shall be retained in the rear ramp mount by the ball detent. The quick release pin shall be securely attached to the post assembly by the cable (see 3.3.7).

3.3.2.3 Pintle. The pintle shall assemble in the post assembly and be retained in the post assembly by the split bearing and spring pin. The pintle shall rotate throughout its full range of travel without binding.

3.3.3 Ammunition box. The ammunition box shall readily assembly to and disassemble from the weapon and be retained on the weapon bracket assembly. The ammunition retaining rod shall move freely throughout its full range of travel and be held securely in position by the spring clip. The ejector plunger shall move freely throughout its full range of travel and be returned to its original position by spring action. Welding of the ammunition box shall be in accordance with MIL-STD-1261, and shall withstand the weld peel test in accordance with MIL-W-12332.

3.3.4 Empty cartridge bag. The empty cartridge bag shall be capable of being retained on and removed from the cartridge bag frame assembly.

3.3.5 Empty cartridge bag frame assembly. The empty cartridge bag frame assembly shall be capable of being attached to and removed from the weapon. The latch shall move freely through its full range of travel without binding, and when released shall return to its original position by spring action. Welding of the cartridge bag frame shall be in accordance with MIL-STD-1261.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

3.3.6 Elastic cord assembly. The elastic cord assembly shall be securely retained on the mount bracket. The elastic cord shall withstand a gradual applied stretch load of 75 pounds ± 5 pounds without damage or permanent stretch. Testing shall be as specified in 4.4.3.2.

3.3.7 Cable and sleeve crimp tensile load. The crimped sleeves on the cable shall be capable of withstanding the tensile load of 50 pounds without evidence of the cable pulling out of the sleeve. Testing shall be as specified in 4.4.3.3.

3.4 Endurance. The armament subsystem shall have a 90 percent probability of firing 10,000 rounds, and withstanding 100 cycles of rough handling without malfunctions, unserviceable parts, or cracking of welded joints with a 10 percent confidence level. Testing shall be as specified in 4.4.3.4.

3.5 Targeting. The armament subsystem with M60D machine gun assembled to the mount shall have an azimuth of $101^{o}$ $-4^{o}$ included angle, an elevation of $12.5^{o}$, to $69^{o}$ depression, and shall meet the target requirements defined in Figures 1a and 1b (see 4.4.2.4).

3.6 Marking. Each armament subsystem shall be clearly marked in accordance with the applicable drawings and MIL-W-13855.

3.7 Workmanship. Workmanship shall be in accordance with the workmanship requirements of MIL-W-13855.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality assurance terms and definitions. Quality assurance terms and definitions used herein are in accordance with MIL-STD-109.

4.3 First article inspection. The first article shall be selected from early production and submitted for inspection in accordance with the contract requirements (see 6.1). The first article shall be representative of production processes to be used during quantity production. The first article shall be subjected to all examination and test specified herein and such other examination and test as are necessary to determine compliance with the requirements of the contract.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot. The formation, size and presentation of inspection lots of armament subsystems, parts and packaging shall be in accordance with MIL-STD-105. Inspection lots shall be as large as practicable in consideration of quality history, manufacturing conditions, and contractor's delivery schedule, and within the limitations of MIL-W-13855. Armament subsystems shall be assembled from lots of component parts that have met all inspection requirements specified herein.

4.4.2 Examination.

4.4.2.1 Component parts and concurrent repair parts. Examination of component parts and concurrent repair parts shall be performed in accordance with the criteria specified in the contract (see 6.1). The contractor's examination of these parts shall be accomplished prior to their assembly into the end item submission for acceptance as repair parts.

4.4.2.2 Armament subsystem. Final examination of armament subsystems shall be performed after completion of all testing and just prior to preservation and packaging. Unless otherwise specified herein, each armament subsystem shall be examined as specified below. Each step in the examination shall include a visual examination for proper cleaning and presence of the specified protective coating and to determine the general quality, completeness of manufacture, assembly, clarity and legibility of markings and workmanship. Armament subsystems failing to meet the requirements shall be rejected.

4.4.2.2.1 Gun mount assembly.

a. Manually examine the gun mount pintle to assure that it is retained in the split bearing by the spring pin, and that it can be manually rotated throughout its full range of travel.
b. Manually examine the quick release pin to assure that it readily assembles to and disassembles from the ramp mount and when assembled, is retained in the ramp mount by the ball detents.
c. Visually and manually examine to assure that the quick release pin is securely attached to the post assembly by the cable (see F11699655 and F11699658).
d. Visually and manually examine the elastic cord assembly to assure that it is securely retained on the post assembly and that it has the full range of swing (see F11699655 and F11699658).
e. Visually and manually examine all welded joints to assure secure and proper welds.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

4.4.2.2.2 Ammunition boxes.

a. Visually and manually examine the retaining rod to assure that it moves freely throughout its full range of travel and that it is held securely by the spring clip.
b. Visually and manually examine the plunger to assure that it slides freely throughout its full range of travel and when released is returned to its original position by spring action.
c. Visually and manually examine all riveted joints to assure secure riveting and that there is no relative movement of the riveted parts.
d. Visually and manually examine all welded joints to assure secure and proper welds.

4.4.2.2.3 Empty cartridge bag.

a. Visually and manually examine the empty cartridge bag to assure that the latch moves freely throughout its full range of travel and when released is returned to its original position by spring action.
b. Visually and manually examine all welded joints of the cartridge bag frame assembly to assure secure and proper welds.

4.4.2.2.4 Armament subsystem assembly.

a. Visually and manually examine all welded joints to assure secure and proper welds.
b. Examine assembleability of the machinegun to the gun mount pintle assembly using approved inspection equipment that simulates the maximum mounting conditions of the M60D machinegun.
c. Using a Government standard M60D machinegun, and equipment as depicted on Figures 1a and 1b, examine to assure that the elevating and traversing limits of the armament subsystem are within the requirements indicated on Figures 1a and 1b. Control of components shall be exercised to meet these limits.

4.4.2.3 Packaging. Examination of packaging of armament subsystems shall be performed in accordance with the classification of defects and acceptable quality levels (AQL's) specified in 4.4.2.3.1. Sample size shall be in accordance with MIL-STD-105, using inspection level I. The following provisions shall apply:

a. The AQL's are specified as percent defective.
b. The AQL listed for each defect shall be applied to the individual defect, not to a group of defects.
c. Examination for packaging defects specified in 4.4.2.3.1 shall apply to each sample of armament subsystems, interior packages, or exterior containers, as applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

4.4.2.3.1 Classification of defects for packaging. Unless otherwise specified in each listed defect, the packaging requirements are specified on Packaging Data Sheet P8436598.

| Categories | Defect | AQL |
|---|---|---|
| Critical: | None defined. | |
| Major: | | |
| 101 | Illegible or incorrect marking. | 1.0 |
| 102 | Improper location of marking. | 1.0 |
| 103 | Improper level of packaging or packing (see procurement documents). | 1.0 |
| 104 | Inadequate cleaning and drying. | 1.5 |
| 105 | Improper preservation application. | 1.5 |
| 106 | Improper closure of unit package. | 1.5 |
| Minor: | None defined. | |

4.4.2.4 Inspection approval Stamp. Armament subsystems which have passed all examinations after successful completion of testing shall be stamped with the Department of Defense complete inspection approval stamp on each post assembly as specified on the drawing. The Government representative will control the stamps used for such stampings required to assure successful completion of all required examination and tests.

4.4.3 Testing.

4.4.3.1 Failure data. Unless otherwise specified herein, all tests shall be conducted on a complete armament subsystem inclusive of Government Furnished Property. If test requirements cited herein are not met, acceptance of the subsystem shall be deferred and the contractor shall accomplish as applicable, the following actions:

a. Conduct a failure analysis study performing a dimensional, physical and visual examination of the components which are suspected to be the cause of failure or malfunction.
b. Evaluate and correct the applicable production processes and procedures to prevent recurrence of the same defect(s) in future production.
c. Examine subsystems, partially assembly subsystems and components (including components and subassemblies at in-process or final assembly) to insure that material containing the same defect is purged from the inventory and not presented to the Government for acceptance.
d. The Government representative shall verify the results of failure analysis and assure that corrective action, as applicable, has been accomplished prior to submission as a reconditioned lot for retest.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

4.4.3.2 Elastic cord testing. A sample of three (3) armament subsystems selected by the Government representative from each 25 armament subsystems produced shall be tested by the contractor for cord stretch load requirements using test method as specified in 4.6.1. Failure of any sample to meet the requirements shall be cause for rejection of the represented lot and the contractor shall perform the corrective action as specified in 4.4.3.1.

4.4.3.3 Cable testing. A sample of three (3) armament subsystems selected by Government representative from each 25 armament subsystems produced shall be tested by the contractor for cable and sleeve tensile load using test method specified in 4.6.2. Failure of any sample to meet the requirements shall cause rejection of the represented lot and the contractor shall perform the corrective actions as specified in 4.4.3.1.

4.4.3.4 Endurance testing.

4.4.3.4.1 Lot size. The initial endurance test lot shall consist of 25 armament subsystems, subsequent endurance lots shall each consist of 100 armament subsystems.

4.4.3.4.2 Procedure. One mount assembly selected by the Government representative from each endurance test lot shall be tested by the contractor using the test method specified in 4.6.3. If the endurance requirements of 3.4 are not met, acceptance of armament subsystems shall be deferred and the contractor shall perform the corrective actions as specified in 4.4.3.1. The Government representative shall verify the results of failure analysis and assure that corrective action, as applicable, has been accomplished prior to submission as a reconditioned lot for retest. Malfunctions attributable to the machinegun, ammunition or links shall not be counted against the armament subsystem being tested, however, such malfunctions shall be recorded.

4.4.3.5 Packaging testing. The contractor shall furnish the Government representative with certification that the packaging materials conform to the applicable packaging data sheets and specifications.

4.4.3.5.1 Determination of cleanliness testing. The contractor shall test items from each inspection lot for determination of cleanliness using the test method specified in 4.6.4.1. Sampling shall be in accordance with MIL-P-116.

4.4.3.5.2 Heat-sealed seam and vacuum retention testing. The contractor shall test level A unit packages from each inspection lot for heat-sealed seam and vacuum retention using the test methods specified in 4.6.4.2 and 4.6.4.3 respectively. Sampling shall be in accordance with MIL-P-116.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

4.4.3.5.3 Repair parts. Testing of packaging of repair parts shall be performed in accordance with the criteria specified in the contract (see 6.1).

4.5 Inspection equipment. Unless otherwise specified in the procurement documents (see 6.1), responsibility for acquisition, maintenance and disposition of measuring and testing equipment prescribed on lists contained on the Index of Inspection Equipment Lists, Drawing IEL8436675 and for all other inspection equipment required to perform inspection required by applicable specifications, shall be in accordance with MIL-I-45607.

4.6 Test methods.

4.6.1 Elastic cord test. The elastic cord shall be tested for the stretch requirements (see 3.3.6) using Government approved inspection equipment. The elastic cord assembly shall have a gradual stretch load applied in both directions of 75 pounds ± 5 pounds without damage or permanent stretching.

4.6.2 Cable test. The cable and sleeve shall be tested for tensile load requirements (see 3.3.7) using Government approved inspection equipment. The cable and sleeve assembly shall withstand a tensile load of 50 pounds without evidence of the cable pulling out of the sleeve. The test shall be accomplished on both the pin connection and bracket connection. The length of the cable loops shall be within the limits specified on the applicable drawing before and after the tensile test load.

4.6.3 Endurance test.

4.6.3.1 Each mount selected for testing in accordance with 4.4.3.4 shall have a 200 round rapid reload ammunition box attached to the machine gun. The ammunition box shall be loaded with two ammunition cartons, each containing 100 rounds of linked ammunition. The two 100 round belts shall be linked together, with a Government standard 7.62mm dummy inert cartridge to form a continuous belt. The empty cartridge bag shall be attached to the machine gun to catch and retain the fired cartridges and links. The first 100 rounds of each belt shall be fired in interrupted burst with at least 10 intentional interruptions in firing. The second 100 rounds of each belt shall be fired in one continuous burst.

4.6.3.2 Each mount selected for testing in accordance with 4.4.3.4 shall be tested for rough handling by placing the mounted machine gun, with loaded ammunition box attached in the maximum position of elevation (muzzle in highest position). From this position the machine gun shall be released and allowed to fall of its own weight throughout the full range of travel on the mount. This shall be accomplished twice following each 200 round series.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

4.6.3.3 The machine gun shall be cooled by forced air to ambient temperature after each 200 round firing. The machine gun may be cleaned and lubricated after each 2000 rounds of firing. At the close of each day's firing the machine gun and mount shall be cleaned and lubricated. Except as otherwise specified herein, lubrication and cleaning shall be as specified in the contract (see 6.1).

4.6.3.4 Welded joints of the mount assembly shall be examined for cracks using magnetic particle inspection, in accordance with MIL-I-6868 and penetrant inspection, in accordance with MIL-I-6866, as applicable before and after the test.

4.6.3.5 Complete and accurate records shall be kept for each test, showing each malfunction and part replacement including the number of the round at which each occured and corrective action is taken.

4.6.3.6 At the completion of the test, mounts shall be disposed of as specified in the contract (see 6.1).

4.6.4 Packaging tests.

4.6.4.1 Determination of cleanliness. The surfaces of each sample unit shall be subjected to the determination of cleanliness test specified in MIL-P-116.

4.6.4.2 Heat-sealed seam. The sample level A unit packages shall be subjected to the heat-sealed seam test specified in MIL-P-116.

4.6.4.3 Vacuum retention. A sufficient vacuum shall be drawn to cause the flexible barrier of level A unit packages to cling snugly to the enclosed item. Care shall be exercised to insure that an excessive amount of vacuum is not applied which might cause puncture or rupture of the barrier.

4.6.4.3.1 Interpretation of results. After remaining undisturbed at room temperature for two hours, the barrier shall be examined to determine whether it is still taut and retracts against the item when drawn away and quickly released.

5. PREPARATION FOR DELIVERY

5.1 Pilot pack. A pilot pack consisting of complete and packed unit, packaged and packed in accordance with Packaging Data Sheet P8436598 to the level of protection specified in the contract (see 6.1) and forwarded as specified in 3.1.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

5.2 Preservation, packaging, packing and marking. The armament subsystem with equipment shall be preserved, unit packaged, packed and marked in accordance with the requirements of Packaging Data Sheet P8436598 for the level of protection specified (see 6.1).

5.3 Repair parts. Repair parts shall be prepared for delivery in accordance with the applicable packaging data sheets specified in the contract (see 6.1).

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Lists of drawings and specifications pertinent to the armament subsystem, showing applicable revision dates.
c. Inspection criteria for components (see 4.4.2.1 and 4.4.3.5.3).
d. Index of inspection equipment list pertinent to the armament subsystem showing applicable revision dates.
e. Number of first articles required (see 3.1).
f. That packages opened for examination shall be repackaged by the contractor at the contractor's expense.
g. Disposition of endurance tested mounts (see 4.6.3.6).
h. Shipping instructions for first article (see 3.1) and pilot pack, if different (see 5.1).
i. Selection of applicable levels of preservation, packaging and packing (see 5.1 and 5.2).
j. Packaging instructions for repair parts (see 5.3).
k. Place of final inspection and acceptance (see "Notes" in MIL-W-13855).
l. List of acceptance inspection equipment to be furnished the contractor and responsibilities for other Government property to be furnished the contractor (see 4.5 and 6.8).
m. Responsibilities for furnishing ammunition, links and machine-gun (see 4.6.3).
n. Certification of welding procedures and test specimens if different (see 3.3.1).
o. Procedures and methods for demilitarizing and disposing of rejected material.
p. Disposition of Government furnished property.
q. Responsibility for test firing facilities and operating procedures (see 6.2).

6.2 Test firing facilities and operating procedures shall be designed by the contractor in conformance with local, state and federal regulations and suitable for carrying out prescribed firing tests with safety of operating and visiting personnel. Copies of these contractor designs shall be forwarded to the contracting officer. Government facilities may be viewed upon application to the contracting officer.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

6.3 When action by a testing agency is required, work programming will be effected with the testing agency at the earliest practicable date.

6.4 To avoid delay in test firing, the contractor should maintain a minimum of two months' supply of ammunition as determined by anticipated firing requirements.

6.5 Contract data requirements. Monthly reports of the results of final examination, endurance test and interchangeability tests shall be specified for delivery on the DD Form 1423 included in the contract.

6.6 Supersession data. This specification includes the requirements of Rock Island Arsenal Purchase Description RIAPD-704, dated 19 Nov 69.

6.7 When warranted, the contract should specify the application of MIL-Q-9858 or MIL-I-45208, as appropriate, on the Management Control Systems Summary List, DD Form 1660.

6.8 Unless otherwise specified (see 6.1 1), the contract should specify the application of MIL-I-45607 and MIL-C-45662 on the Management Control Summary List, DD Form 1660.

Custodian:
Army - WC

Preparing activity:
Army - WC

Project Number:
1005-A428



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

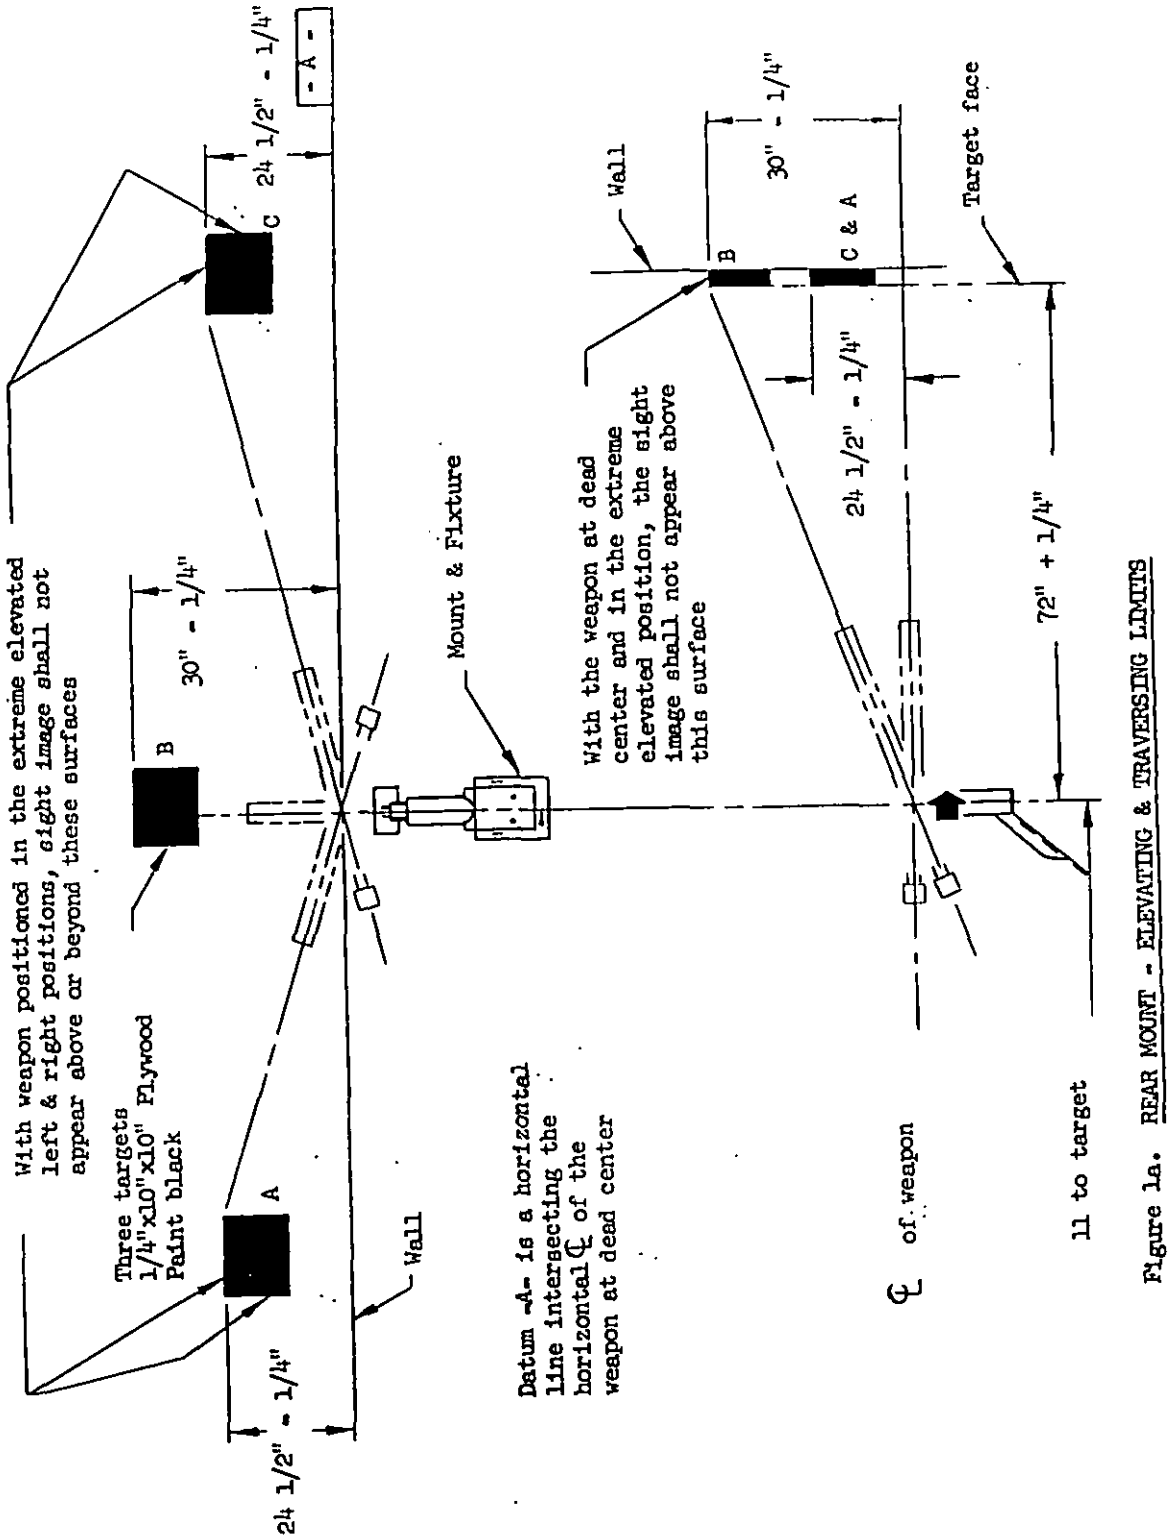



Figure 1a. REAR MOUNT - ELEVATING & TRAVERSING LIMITS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

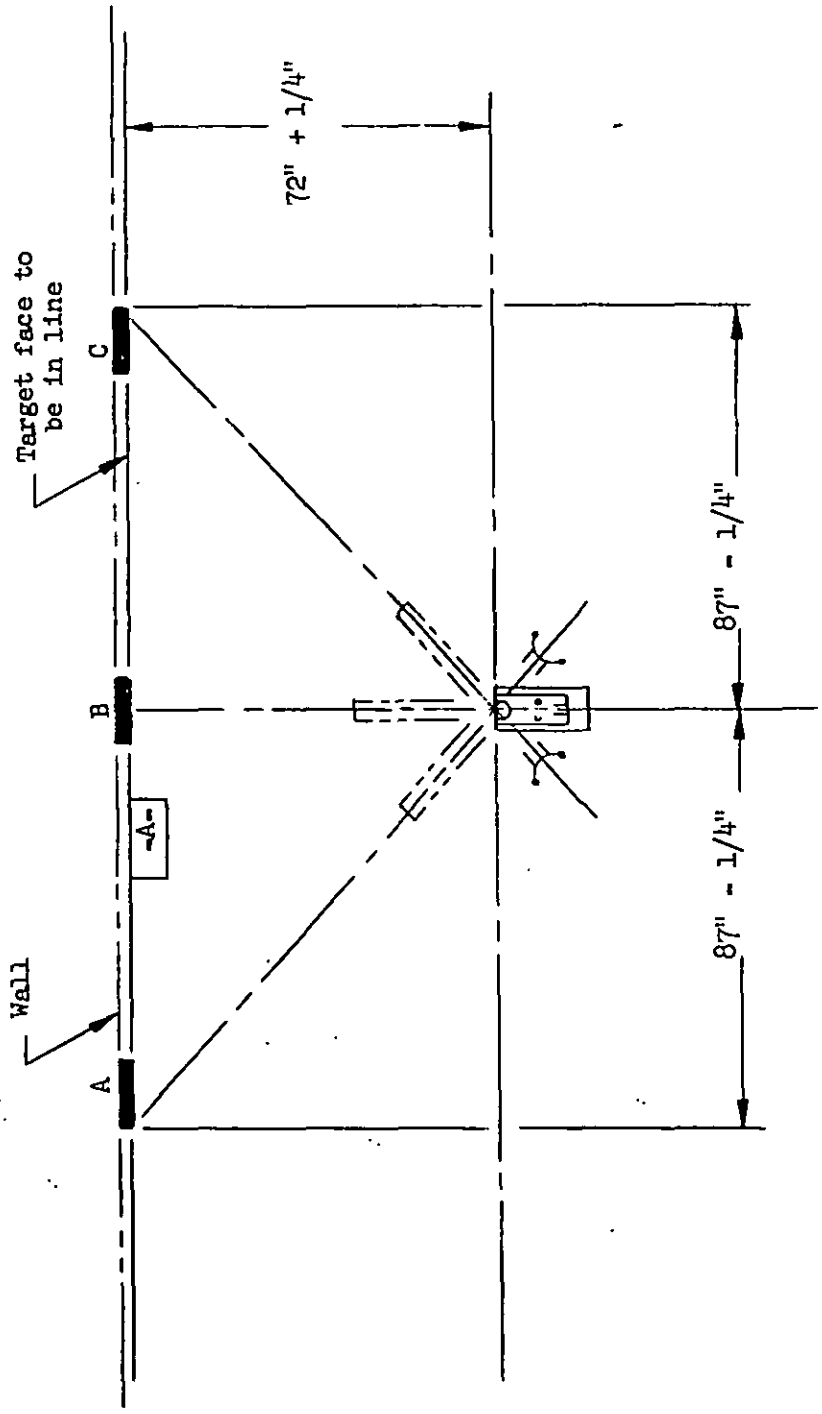



Figure 1b. REAR MOUNT - ELEVATING & TRAVERSING LIMITS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

To detach this form, cut along this line.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:25Z
Check the source to verify that this is the current version before use.