
MIL-DTL-45938/11A
14 NOVEMBER 1995
SUPERSEDING
MIL-N-45938/11
16 MAY 1983

* DETAIL SPECIFICATION SHEET

NUT, PLAIN, CLINCH AND NUT, SELF-LOCKING, CLINCH (FLOATING, 400 °F)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for acquiring the nuts described herein shall consist of this specification and the latest issue of MIL-N-45938

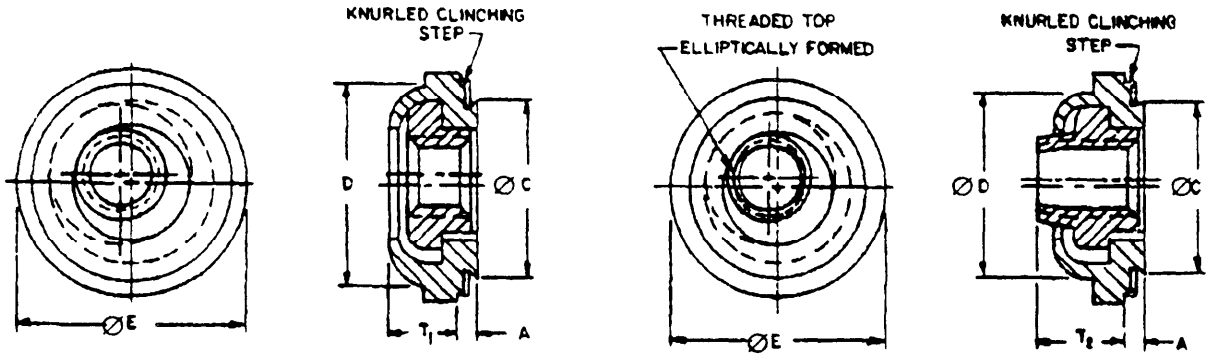

NOTES
1 All dimensions are in inches

FIGURE 1 NUT, PLAIN, CLINCH AND NUT, SELF-LOCKING, CLINCH (FLOATING, 400°F)

DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1 Material See Table II

2 Finish See Table II


3 Threads Plain threads shall be class 2B in accordance with MIL-S-7742 Self-locking threads shall be class 3B in accordance with MIL-S-7742 The upper portion of the nut shall be deformed to provide self-locking feature, with performance as specified in MIL-N-25027

4 Float of the nut portion of the assembly shall not be less than .015 radially from a centered position

5 Push-out and torque-out values between retainer and panel shall be as specified in Table III when properly installed in metal thicknesses of .040 and .056


* 6 Part number The part number consists of the letter "M", the basic number of this specification sheet, and a dash number taken from Table I Low and medium carbon steel clinch nuts requiring a zinc finish, add the letter "Z" to the end of the part number

Example M45938/11-1CL

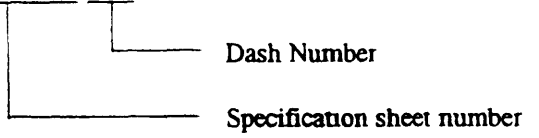


M45938/11-1CL = Self-locking, floating, clinch nut, CRES 303 steel, 112-40UNC-3B, solid film lubricant

* Example M45938/11-1Z

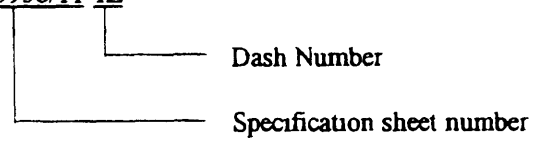

M45938/11-1Z = Non-locking, floating, clinch nut, carbon steel, 112-40UNC-3B, zinc finish

* Example M45938/11-1

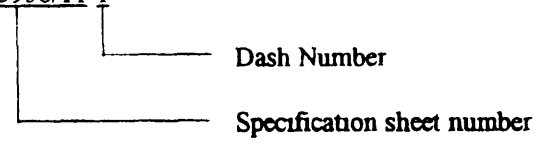

M45938/11-1 = Non-locking, floating, clinch nut, carbon steel, 112-40UNC-3B, cadmium finish

Source: https://assist.dla.mil -- Downloaded: 202640-22T04:23Z
Check the source to verify that this is the current version before use.

TABLE I DASH NUMBERS AND DIMENSIONS

DASH NUMBER				THREAD SIZE	A MAX	PANEL THICK-NESS MIN	MOUNTING HOLE IN PANEL + 003 - 000	ØC MAX	ØD MAX	ØE MAX	T_1 MAX	T_2 MAX	DISTANCE CENTER OF HOLE TO EDGE OF PANEL MIN
PLAIN		SELF-LOCKING											
CARBON STEEL	CRES	CARBON STEEL	CRES										
01	0 C	--	--	086-56UNC	038	040	290	289	290	36	13	--	30
02	02C	--	--		054	056							
1	1C	1L	1CL	112-40UNC	.038	040	290	289	290	36	13	19	30
2	2C	2L	2CL		.054	056							
3	3C	3L	3CL	138-32UNC	038	040	328	327	335	39	13	20	32
4	4C	4L	4CL		.054	056							
5	5C	5L	5CL	164-32UNC	.038	040	368	367	365	44	13	21	34
6	6C	6L	6CL		.054	056							
7	7C	7L	7CL	190-24UNC	038	.040	406	405	405	47	17	27	36
8	8C	8L	8CL		054	056							
9	9C	9L	9CL	190-32UNC	038	040							
10	10C	10L	10CL		054	056							
11	11C	11L	11CL	250-20UNC	054	056	515	514	510	60	21	31	42
12	12C	12L	12CL	250-28UNF									

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

TABLE II MATERIAL AND FINISH

ITEM	PLAIN		SELF-LOCKING	
	MATERIAL	FINISH	MATERIAL	FINISH
Retainer	Low or medium carbon steel 2/	Cadmium, QQ-P-416, type II, class 3	Low or medium carbon steel 2/	Cadmium, QQ-P-416, type II, class 3
		Zinc, ASTM B633 SC1, type III		Zinc, ASTM B633 SC1, type III
1/	CRES 303 ASTM A582	Passivate	CRES 303 ASTM A582	Passivate
Nut	Low or medium carbon steel 2/	Cadmium, QQ-P-416, type II, class 3	CRES 303 ASTM A582	Solid-film lubricant MIL-L-46010, type I, over cadmium QQ-P 416, type II, class 3, chromate prime
		Zinc ASTM B633 SC1, type III		
	CRES 303 ASTM A582	Passivate		

1/ For use in panel materials of 70HRB or less
2/ Low or medium carbon steel, compositions from 1005 up to 1045 (UNS G10050 to UNS G10450) inclusive, in accordance with FED-STD-66

TABLE III RETAINER-MINIMUM PERFORMANCE REQUIREMENTS

THREAD SIZE		AL2024-T3 (UNS A92024)		COLD-ROLLED STEEL		APPROX INSTALLATION FORCE (LBS)
	PANEL THICKNESS MIN	PUSH-OUT (LBS) MIN	TORQUE-OUT (IN-LBS) MIN	PUSH-OUT (LBS) MIN	TORQUE-OUT (IN-LBS) MIN	
086-56UNC	040	160	45	210	60	3000
112-40UNC	056					
138-32UNC	040	175	60	230	80	3000
	.056					
164-32UNC	040	180	70	250	100	3000
	.056					
190-24UNC	040	210	100	270	120	3500
	056					
190-32UNF	040	210	100	270	120	3500
	056					
250-20UNC	056	210	200	300	200	5000
250-28UNF						


Source: https://assist.dla.mil -- Downloaded: 202610-22T04:23Z
Check the source to verify that this is the current version before use.

RECOMMENDED INSTALLATION PROCEDURE

a Drill or punch hole in panel (see Table I for size)

b Using the installation set-up shown in the sketch below, apply force (see Table III) until retainer flange contacts sheet

c Install the screw or bolt from the shank end of the nut

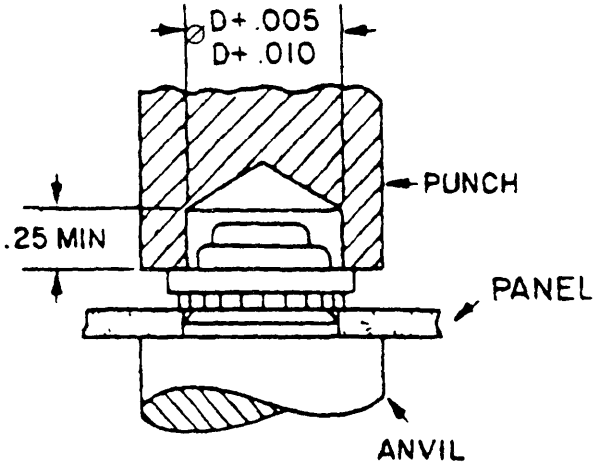

* NOTE The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue

Custodians
Army - AR
Navy - OS
Air Force - 99

Review activities
Army- AT, AV, MI
Air Force - 11, 82
NSA - NS
Navy - MC

Preparing activity:
DLA - IS

(Project 5310-2186)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3 and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6 and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, or to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-DTL-45938/11	2. DOCUMENT DATE (YYMMDD) 951114

3. DOCUMENT TITLE NUT, PLAIN, CLINCH AND NUT, SELF-LOCKING, CLINCH (FLOATING, 400 DEGREES F)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach sheets if needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY DLA-IS

a. NAME Emelia Altoman	b. TELEPHONE (Include Area Code) (1) Commercial (215) 697-6827
c. ADDRESS (Include Zip Code) Defense Industrial Supply Center 700 Robbins Avenue Bldg. 3 (Code DISC-EEC) Philadelphia, PA 19111-5096	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041 TELEPHONE (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:23Z
Check the source to verify that this is the current version before use.