
MILITARY SPECIFICATION SHEET

INSERT, SCREW THREAD-KEYRING LOCKED, SELF-LOCKING AND NON SELF-LOCKING, 180 KSI FTU.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the inserts described herein shall consist of this document and the latest issue of specification MIL-I-45934.

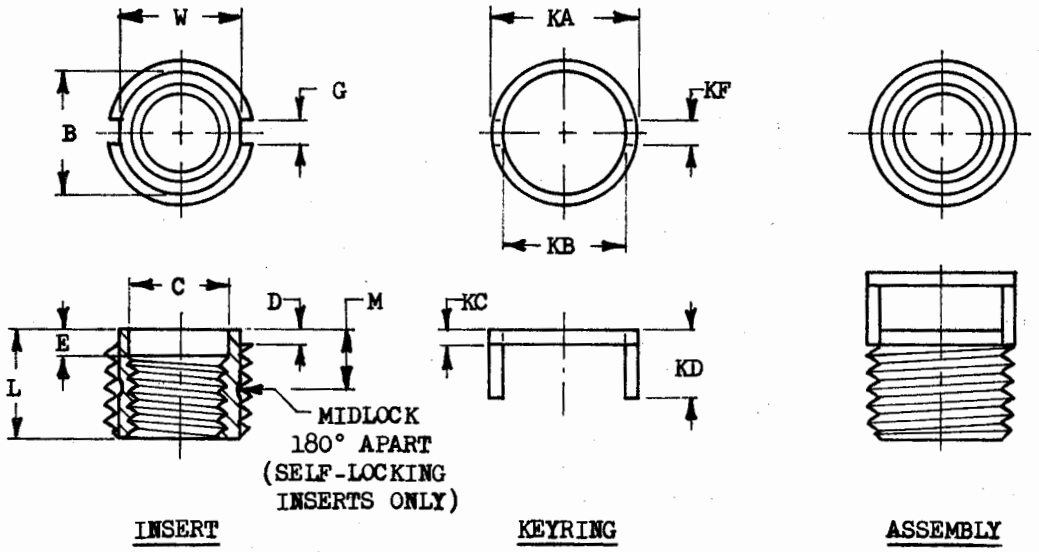

Dash No.	Internal Threads UNJF-3B (see *)	External Threads UNJF-3A	B ±.005	C ±.005	D ±.005	E ±.010	G ±.005	L ±.015	M REF.	W REF.	KA +.000 -.005	KB +.010 -.000	KC +.005 -.000	KD ±.010	KF REF.
1*	.1120 - 40	.1900 - 32	.130	—	.032	—	.035	.190	.065	.128	.190	.136	.027	.122	.030
2*	.1380 - 32	.2160 - 28	.160	—	.037	—	.065	.250	.085	.158	.216	.166	.032	.127	.060
3*	.1640 - 32	.2500 - 28	.179	.170	.037	.060	.065	.312	.145	.172	.250	.185	.032	.127	.060
4	.1900 - 32	.3125 - 24	.236	.196	.040	.070	.065	.312	.170	.233	.312	.242	.035	.145	.060
5	.2500 - 28	.4375 - 20	.338	.257	.052	.070	.081	.437	.200	.334	.437	.344	.047	.203	.076
6	.3125 - 24	.5000 - 20	.398	.319	.052	.070	.096	.562	.215	.392	.500	.404	.047	.234	.091
7	.3750 - 24	.6250 - 18	.507	.382	.060	.070	.128	.625	.230	.496	.625	.516	.055	.255	.123
8	.4375 - 20	.7500 - 16	.619	.468	.067	.100	.159	.687	.285	.605	.750	.625	.062	.312	.154
9	.5000 - 20	.8750 - 14	.728	.515	.075	.100	.159	.812	.295	.717	.875	.734	.070	.351	.154
10	.5625 - 18	.8750 - 14	.728	.593	.075	.100	.159	1.000	.315	.717	.875	.734	.070	.351	.154
11	.6250 - 18	1.1250 - 12	.930	.656	.099	.100	.190	1.000	.330	.913	1.125	.937	.094	.437	.185
12	.7500 - 16	1.2500 - 12	1.055	.787	.099	.100	.190	1.250	.350	1.043	1.250	1.062	.094	.469	.185
14	.8750 - 14	1.5000 - 12	1.273	.913	.114	.100	.253	1.437	.385	1.253	1.500	1.281	.109	.531	.248
16	1.0000 - 12	1.5000 - 12	1.273	1.039	.114	.100	.253	1.875	.415	1.253	1.500	1.281	.109	.531	.248

* Dash 1, 2 and 3 Internal Threads are UNJC - 3B

FSC5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:20Z
Check the source to verify that this is the current version before use.

NOTES

1. MATERIAL: Steel, alloy, 4130 per MIL-S-6758 or 4140 per MIL-S-5626.
Steel, corrosion resistant, 303 per MIL-W-52263 or QQ-S-764.
Steel, corrosion and heat resistant, A286 per AMS5737.
Locking keyrings: Corrosion resistant steel 410 per AMS5504 or 416 per AMS5610 or 302 per QQ-W-423.

2. PROTECTIVE COATING OR TREATMENT: Alloy steel shall be cadmium plated per QQ-P-416, Type II, Class 2.
Corrosion resistant steel shall be passivated per QQ-P-35.
Inserts shall be silver plated per AMS2411 when specified.
Inserts with self-locking internal threads shall be coated with a dry-film lubricant conforming to MIL-L-8937.

3. SURFACE ROUGHNESS: Thread surface to be 63 microinches, turned surfaces to be 125 microinches, milled areas to be 125-250 microinches; all in accordance with ANSI B46.1.

4. THREADS: All threads shall conform to Handbook H28, Part I, and MIL-S-8879, (except as noted in MIL-N-25027 for self-locking internal threads).

5. HEAT TREATMENT: Alloy steel inserts shall be heat treated in accordance with MIL-H-6875.

6. HARDNESS: Alloy steel, Rockwell C range 36-40.
Locking keyrings, 410 and 416 Rockwell C range 35-45.

7. DIMENSIONS: All dimensions are in inches, to be met after protective coating or treatment.

8. TOLERANCES: Linear ± .010, angular $\pm 2^{\circ}$, unless otherwise specified.

9. CONCENTRICITY: Concentricity shall be .006 TIR max. between p.d. of internal and external threads.

10. PART NUMBERS: The part number consists of the document number plus the dash number, Add "A" in lieu of dash for A286 steel; Add "C" in lieu of dash for 303 steel; Add "L" as suffix to dash number for self-locking internal threads; Add "P" as suffix to dash number for silver plating.

Examples:

M45934/2-5	Insert, alloy steel, non locking
M45934/2C5L	Insert, 303 corrosion resistant steel, self-locking.
M45934/2A5LP	Insert, A286 corrosion and heat resistant steel, self-locking, silver plated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:20Z
Check the source to verify that this is the current version before use.

11. Inserts to be free of all hanging burrs and slivers which might become dislodged under usage.

12. Install inserts in accordance with MIL-I-45934/4.

13. These inserts are manufactured under one or more of the following United States Patents:

    2,980,929 Expires 25 March 1978
    2,849,046 Expires 26 August 1975
    2,822,014 Expires 4 February 1975
    2,783,811 Expires 5 March 1974
    The Government does not have a royalty-free license.

14. For design feature purposes, this specification takes precedence over procurement documents referenced herein.

15. Referenced documents shall be of the issue in effect on date of invitations for bid.

Custodians:

Army - WC

Navy - AS

Air Force - 82

Review activities:

Army - AT, AV, EL, MU

Navy - None

Air Force - 11

DSA-IS

NSA

Preparing activity:

Army - WC

Project No. 5340-0868

User activities:

Army - GL, ME

Navy - MC, SH

Air Force - None

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:20Z
Check the source to verify that this is the current version before use.