
MILITARY SPECIFICATION SHEET

INSERT, SCREW THREAD-KEYRING LOCKED, SELF-LOCKING, AND NON SELF-LOCKING, 220 KSI FTU.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the inserts described herein shall consist of this document and the latest issue of specification MIL-I-45934.

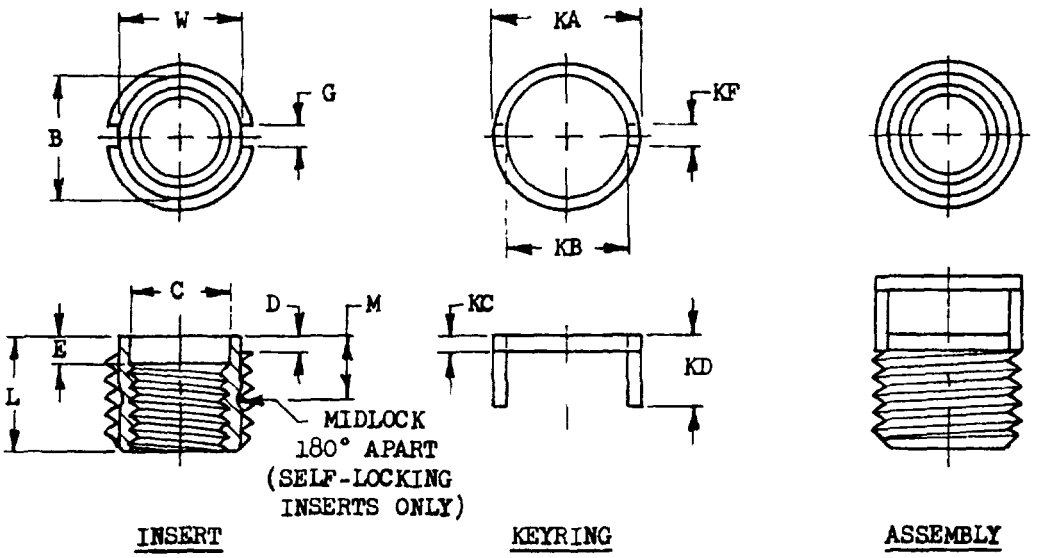

Dash No	Internal Threads UNJF-3B	External Threads UNJF 3A	B ± 005	C ± 005	D ± 005	E ± 010	G ± 005	L ± 015	M REF	W REF	KA +000 005	KB +010 000	KC +005 -000	KD ± 010	KF REF
4	1900 - 32	3125 24	236	196	040	070	065	375	170	233	312	242	035	145	060
5	2500 - 28	4375 20	338	257	052	070	081	500	200	334	437	344	047	203	076
6	3125 24	5625 - 18	447	319	060	070	128	562	215	434	562	453	055	255	123
7	3750 - 24	7500 - 16	619	382	067	070	159	625	230	605	750	625	062	312	154
8	4375 - 20	8750 14	728	468	075	100	159	750	285	717	875	734	070	351	154
9	5000 - 20	8750 - 14	728	515	075	100	159	1 000	295	717	875	734	070	351	154
10	5625 18	1 0000 12	836	593	083	100	190	1 062	315	820	1 000	842	078	390	185
11	6250 - 18	1 1250 - 12	930	656	099	100	190	1 187	330	913	1 125	937	094	437	185
12	7500 - 16	1 3750 12	1 148	787	114	100	253	1 375	350	1 125	1 375	1 156	109	531	248
14	8750 - 14	1 5000 12	1 273	913	114	100	253	1 750	385	1 253	1 500	1 281	109	531	248
16	1 0000 12	1 5000 12	1 273	1 039	114	100	253	2 250	415	1 253	1 500	1 281	109	531	248

FSC5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:20Z
Check the source to verify that this is the current version before use.

NOTES

1. MATERIAL: Steel, alloy, 4130 per MIL-S-6758 or 4140 per MIL-S-5626. Steel, corrosion and heat resistant, A286 per AMS5737. Locking keyrings· Corrosion resistant steel 410 per AMS5504 or 416 per AMS5610.

2. PROTECTIVE COATING OR TREATMENT: Alloy steel shall be cadmium plated per QQ-P-416, Type II, Class 2.
Corrosion and heat resistant steel shall be passivated per QQ-P-35.
Inserts shall be silver plated per AMS2411 when specified.
Inserts with self-locking internal threads shall be coated with a dry-film lubricant conforming to MIL-L-8937.

3. SURFACE ROUGHNESS: Thread surface to be 63 microinches, turned surfaces to be 125 microinches, milled areas to be 125-250 microinches; all in accordance with ANSI B46.1.

4. THREADS: All threads shall conform to Handbook H28, Part I, and MIL-S-8879, (except as noted in MIL-N-25027 for self-locking internal threads).

5. HEAT TREATMENT: Alloy steel inserts shall be heat treated in accordance with MIL-H-6875.

6. HARDNESS: Alloy steel, Rockwell C 45 Min.
Locking keyrings, Rockwell C range 35-45.

7. DIMENSIONS· All dimensions are in inches, to be met after protective coating or treatment.

8. TOLERANCES: Linear ± .010, angular ± 2°, unless otherwise specified.

9. CONCENTRICITY: Concentricity shall be .006 TIR max. between p.d. of internal and external threads.

10. PART NUMBERS: The part number consists of the document number plus the dash number.

Add "A" in lieu of "dash" for A286 corrosion and heat resistant steel.
Add "L" as suffix to dash number for self locking internal threads.
Add "P" as suffix to dash number for silver plating.

Examples:

M45934/3-25	Insert, alloy steel, non-locking.
M45934/3A25	Insert, corrosion and heat resistant steel, self-locking, silver plated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:20Z
Check the source to verify that this is the current version before use.

11. Inserts to be free of all slivers and hanging burrs which might become dislodged under usage.

12. Install inserts in accordance with MIL-I-45934/4

13. These inserts are manufactured under one or more of the following United States Patents:

    2,980,929 Expires 25 March 1978
    2,849,046 Expires 26 August 1975
    2,822,014 Expires 4 February 1975
    2,783,811 Expires 5 March 1974
    The Government does not have a royalty-free license.

14. For design feature purposes, this specification takes precedence over procurement documents referenced herein.

15. Referenced documents shall be of the issue in effect on date of invitations for bid.

Custodians:

Army - WC

Navy - AS

Air Force - 82

Review activities.

Army - AT, AV, EL, MU

Navy - None

Air Force - 11

DSA-IS

NSA

Preparing activity:

Army - WC

Project No. 5340-0869

User activities:

Army - GL, ME

Navy - MC, SH

Air Force - None

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:20Z
Check the source to verify that this is the current version before use.