MILITARY SPECIFICATION SHEET

INSERT, SCREW THREAD, KEYRING LOCKED
HOLE DIMENSIONS FOR AND ASSEMBLY OF.

This specification is mandatory for use by all Departments and Agencies of the Department of Defence.

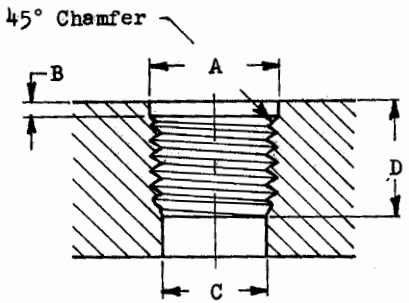

FIG. I. HOLE PREPARATION

1) Prepare Hole (Fig. I) in accordance with Table I for MIL-I-45934/1,/2 and /3 and corresponding dash numbers.
2) Axis of hole to be normal to entry surface or provide spotface when required.
3) 'A' diameter and thread P.D. to be concentric within .005 TIR
4) Surface roughness, machined surfaces to be 125 microinches in accordance with ANSI B46.1
5) Remove all burrs and sharp edges
6) Tolerances, unless otherwise specified, linear ± .010, angular ± 5°

TABLE I.

MIL-I-45934 /1 Dash Number	MIL-I-45934 /2 Dash Number	MIL-I-45934 /3 Dash Number	Tap Size UNJF-3B	A C'bore Dia. +.010 -.000	B C'bore Depth +.015 -.000	C Hole Dia. Min.	C Hole Dia. Max	D Min. Thread Depth
	1		.1900-32	.190	.046	.1596	.1675	.237
2			.2160-28	.216	.046	.1812	.1896	.244
	2		.2160-28	.216	.046	.1812	.1896	.304
3			.2500-28	.250	.046	.2152	.2229	.304
	3		.2500-28	.250	.046	.2152	.2229	.366
4			.3125-24	.312	.046	.2719	.2799	.312
	4		.3125-24	.312	.046	.2719	.2799	.375
		4	.3125-24	.312	.046	.2719	.2799	.437
5			.3750-24	.375	.062	.3344	.3418	.437
6	5		.4375-20	.437	.078	.3888	.3970	.512
		5	.4375-20	.437	.078	.3888	.3970	.575
7	6		.5000-20	.500	.078	.4513	.4591	.637
		6	.5625-18	.562	.078	.5084	.5166	.645
8	7		.6250-18	.625	.078	.5709	.5788	.708
		7	.7500-16	.750	.093	.6892	.6977	.720
9	8		.7500-16	.750	.093	.6892	.6977	.780

(cont. on page 2.)

FSC5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:20Z
Check the source to verify that this is the current version before use.

MIL-I-45934 /2 Dash Number	MIL-I-45934 /3 Dash Number	Tap Size UNJF-3B	A C'bore Dia. +.010 -.000	B C'bore Dia. +.015 -.000	C Hole Dia Min.	C Hole Dia Max.	D Min. Thread Depth
	8	.8750-14	.875	.093	.8055	.8152	.857
		.8750-14	.875	.093	.8055	.8152	.920
10	9	.8750-14	.875	.093	.8055	.8152	1.044
	10	1.0000-12	1.000	.109	.9189	.9289	1.187
11		1.1250-12	1.125	.125	1.0439	1.0539	1.125
	11	1.1250-12	1.125	.125	1.0439	1.0539	1.312
12		1.2500-12	1.250	.125	1.1689	1.1789	1.375
	12	1.3750-12	1.375	.140	1.2939	1.3039	1.500
14		1.5000-12	1.500	.140	1.4189	1.4289	1.562
	14	1.5000-12	1.500	.140	1.4189	1.4289	1.875
16		1.5000-12	1.500	.140	1.4189	1.4289	2.000
	16	1.5000-12	1.500	.140	1.4189	1.4289	2.375

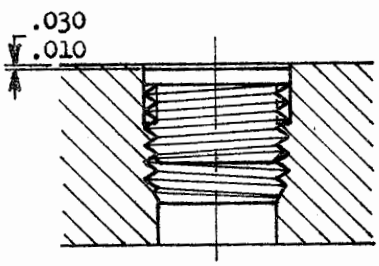

FIG. II. INSTALLATION

7) Install insert to depth shown (Fig. II)
8) Drive or press keyring flush with top of insert
9) Replacement of inserts is made with the same size parts as those removed and in same manner as originally installed.

Custodians:

Army - WC
Navy - AS
Air Force - 82

Review activities:

Army - AT, AV, EL, MU
Navy - None
Air Force - 11
DSA-IS
NSA

Preparing activity:

Army - WC

Project No. 5340-0870

User activities:

Army - GL, ME
Navy - MC, SH
Air Force - None

Source: https://assist.dla.mil - Downloaded: 2026-10-22T04:20Z
Check the source to verify that this is the current version before use.