
MILITARY SPECIFICATION SHEET

NUT, PLAIN, SPLINE, ROUND

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the nuts described herein shall consist of this specification and the latest issue of MIL-N-45938

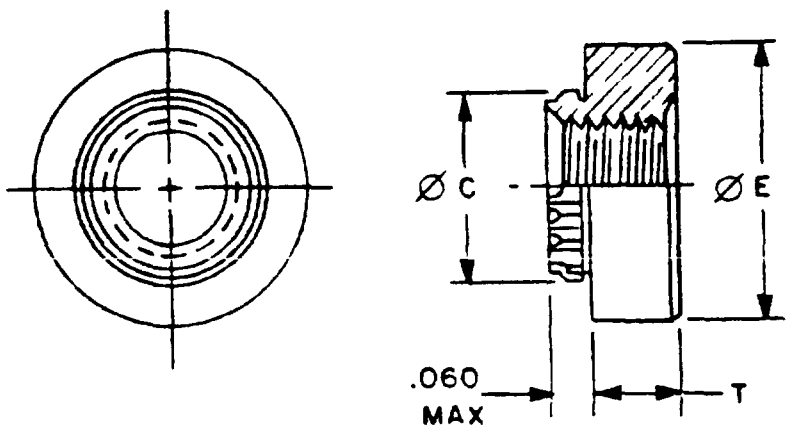

Ⓑ DENOTES CHANGES

NOTES:
1. All dimensions are in inches.
2 Shank profile may vary

FIGURE 1. CONFIGURATION.

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NO. CARBON STEEL	DASH NO. CRES	THREAD CLASS 2B, MIL-S-7742	HOLE DIA IN BOARD +.003 -.000	∅C (B) ±.003	∅E ±.005	T ±.005	CENTER OF HOLE TO BOARD EDGE MIN
1	1C	.086-56UNC (2-56)	.147	165	219	065	.16
2	2C	.112-40UNC (4-40)	166	184	.219	065	17
3	3C	.138-32UNC (6-32)	213	.231	281	.065	.22
4	4C	.164-32UNC (8-32)	.250	.268	.344	.096	.25
5	5C	.190-32UNF (10-32)	.272	.290	.375	127	.28

REQUIREMENTS.

1 Material Carbon steel, heat treated to a case hardness of 35HRC, for use in all types of printed circuit boards, and acrylic and polycarbonate panels.
Corrosion-resistant steel Type 303 (UNS 30300) for use in all types of printed circuit boards, and acrylic and polycarbonate panels in accordance with AMS 5640.

2 Finish. Carbon steel shall be electroplated tin per MIL-T-10727, Type I.

B Corrosion-resistant steel shall be cleaned and descaled in accordance with ASTM A 380 and passivated in accordance with QQ-P-35.

3. Push-out and torque-out values. Push-out and torque-out values shall be as specified in table II when properly installed in .060 inch minimum thick G-10 fiberglass board.

TABLE II. PERFORMANCE DATA.

SIZE	APPROXIMATE INSTALLATION FORCE, LBS	PUSH-OUT LBS (B) MIN	TORQUE-OUT IN/LBS MIN
2-56	600	40	5
4-40	600	45	12
6-32	600	60	20
8-32	600	75	25
10-32	750	80	30

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:23Z
Check the source to verify that this is the current version before use.

4. Part number. Part number consists of the letter "M" followed by the basic specification sheet and a dash number taken from Table I.


Example M45938/12-5C indicates .190-32UNF-2B Nut, plain, round spline CRES (303)

Dash number

Specification sheet number

Recommended installation procedure.

a Punch or drill hole.
b Locate nut shank squarely in the hole.
c. Apply vertical force between two parallel flat surfaces to totally embed broaching ring around the entire circumference The shoulder shall contact the structure for a full 360° The bottom of the shank shall not protrude from the underside of the board or panel which must be at least 0 060 inches thick.
d The fastener is securely mounted when its shoulder or head is in contact with the board or panel.
e Install screw or bolt from shank side of nut.

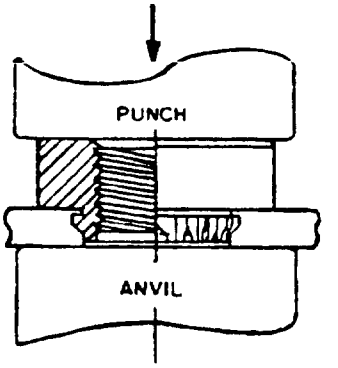

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - AV, ER
Air Force - 11, 82
DLA - IS
NSA - NS

User activities.
Army - MI
Navy - MC

Preparing activity:
Army - AR

Agent:
DLA-IS

(Project 5310-1679)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army ARDEC
ATTN: SMCAR-ESC-S
Picatinny Arsenal, NJ 07806-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-N-45938/12B	NUT, PLAIN, SPLINE, ROUND

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording.

b Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last First MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

(FOLD ALONG THIS LINE)

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:23Z
Check the source to verify that this is the current version before use.

DD FORM 1426