
MILITARY SPECIFICATION SHEET

NUT, PLAIN, CLINCH AND NUT, SELF-LOCKING, CLINCH (SELF-CLINCHING, KNURLED COLLAR, MINIATURE, FLOATING, 450°F and 600°F)

This specification is approved for use by all Department and Agencies of the Department of Defense.

The complete requirements for acquiring the nut described herein shall consists of this specification and the latest issue of specification MIL-N-45938.

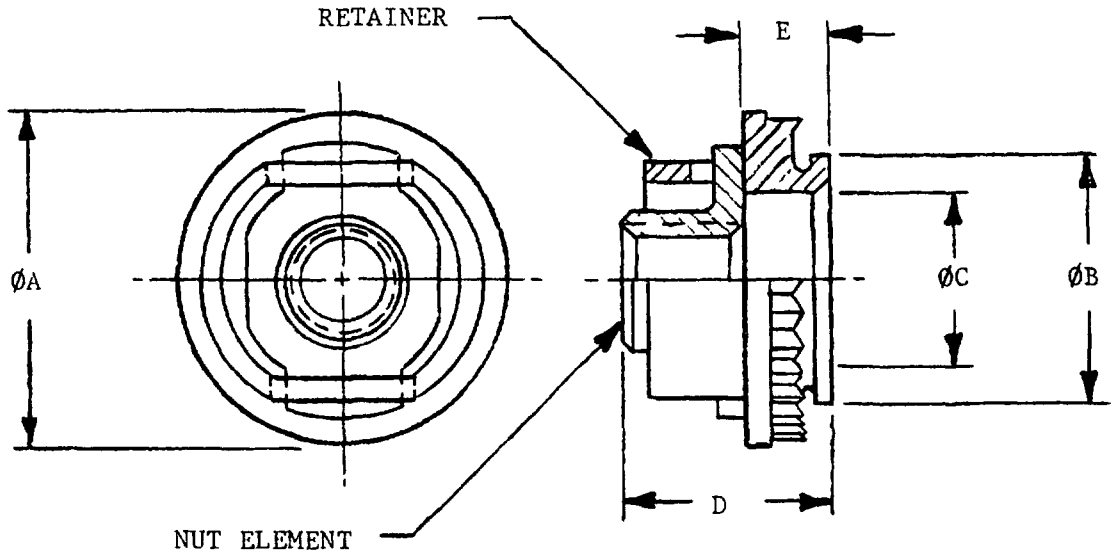

NOTES:

1. Dimensions are in inches.

FIGURE 1. Dimensions and Configuration

TABLE I. Dash numbers, part dimensions and installation hole dimensions

DASH NUMBERS		THREAD MIL-S-8879 CLASS -3B	A DIA ±.015	B DIA +.001 -.005	C DIA ±.005	D MAX	E ±.010	SHEET THK MIN	HOLE SIZE IN SHEET +.004 -.001
ALLOY STEEL (450°F)	CRES A-286 (600°F)								
2	2C	.1120-40UNJC	.320	.248	.172	.224	.077	.040	.250
3	3C	.1380-32UNJC							
4	4C	.1640-32UNJC	.410	.310	.220	.265	.097	.040	.312
5	5C	.1900-32UNJF				.285			
6	6C	.2500-20UNJC	.500	.373	.281	.360	.145	.074	.375
7	7C	.2500-28UNJC							

FSC 5310

Source: https://assist.dla.mil - Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Alloy steel for use in materials with a hardness of 28 HRC max. Corrosion-resisting steel for use in materials with a hardness of 90 HRB max.


2. Protective coating or treatment: Alloy steel nut and retainer shall be cadmium plated plus solid film lubricant (solid film lubricant on retainer is manufacturers option). Corrosion-resisting steel nut and retainer shall be silver plated plus solid film lubricant.

3. Threads: Threads shall be in accordance with MIL-S-8879 and shall apply before application of solid film lubricant. The upper portion of the nut element shall be deformed to provide self-locking feature.

4. Push-out and torque-out values of alloy steel nuts shall be as specified in Table II when properly installed in 6061-T6 aluminum alloy.

5. Military part number: Consists of the letter M, plus the basic number of the specification sheet plus a dash number taken from Table I plus the letter L for self-locking nut or leave blank if non-locking feature.

Example of Military part number:

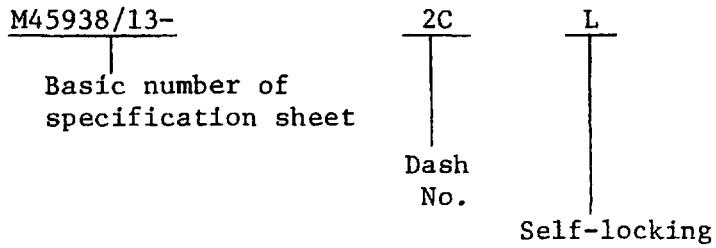

Explanation of part number example:

Nut, miniature, floating, self-locking, steel, CRES, A-286, .1120-40UNJC internal thread size, and with self-locking feature.

TABLE II. 6061-T6 aluminum alloy parent material

SIZE	APPROX. INSTALL FORCE LB	PUSH OUT LB MIN	TORQUE-OUT, IN-LB MIN *
.1120	2500	129	30
.1380	2500	129	30
.1640	3800	237	100
.1900	3800	237	100
.2500	4800	544	130

* Noted values represent nut element torquing-out of retainer portion of nut, retainer remains in parent material.

Source: https://assist.dla.mil -- Downloaded: 202640-22T04:23Z
Check the source to verify that this is the current version before use.

RECOMMENDED INSTALLATION PROCEDURES:

a. Drill or punch hole. (Corrosion-resisting steel shall be drilled).
b. Locate pilot squarely in hole. Use exit side of punched hole.
c. Using a drive tool and anvil as shown in figure 2, apply sufficient force to cause a .015 inch minimum penetration into the structure for a full 360°. Tool shown is a depth-stop type tool which installs nut to proper depth when tool bottoms against sheet surface. Use of nut manufacturer's drive tool and avil is mandatory. (Rosan, Inc., Newport Beach, CA - FSCM 83324)

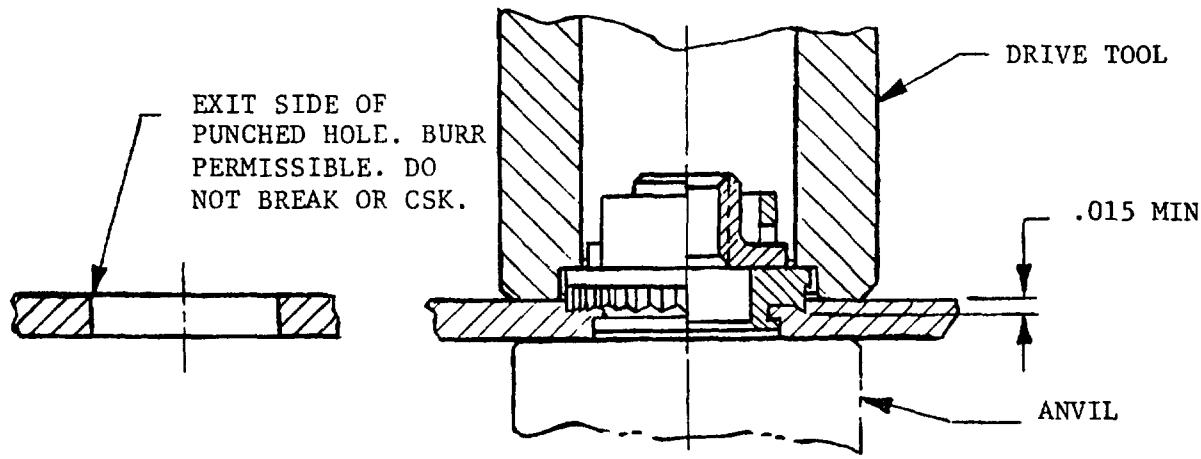


FIGURE 2. Hole preparation and installation

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - AV
Air Force - 11
NSA - NS
DLA - IS

User activities:
Army - MI, ME, AT
Navy - SH, AS, MC
Air Force - 82

Preparing activity:
Army - AR

(Project 5310-1286)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Armament Munitions &
Chemical Command
ATTN DRSMC-TST-S(D)
Dover, NJ 07801

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-N-45938/13	

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5 PROBLEM AREAS

a. Paragraph Number and Wording:

b Recommended Wording.

c Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

INCH-POUND

NOTICE
OF VALIDATION

MIL-N-45938/13
NOTICE 1
12 June 1989

MILITARY SPECIFICATION SHEET

Nut, Plain, Clinch and Nut, Self-Locking, Clinch
(Self-Clinching, Knurled Collar, Miniature, Floating, 450°F and 600°F)

MIL-N-45938/13, dated 10 February 1984, has been reviewed and determined to be valid for use in acquisition.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - AV
Air Force - 11
NSA - NS
DLA - IS

User activities:
Army - AT, ME, MI
Navy - AS, MC, SH
Air Force - 82

Preparing activity:
Army - AR

AMSC N/A

FSC 5310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

INCH-POUND

MIL-N-45938/13
AMENDMENT 1
19 April 1996

MILITARY SPECIFICATION

NUT, PLAIN, CLINCH AND NUT, SELF-LOCKING,
CLINCH (SELF-CLINCHING, KNURLED COLLAR,
MINIATURE, FLOATING, 450°F AND 600°F)

This amendment forms a part of MIL-N-45938/13, dated 12 June 1989, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Table I, bottom line, correct ".2500-28 UNJC" to ".2500-28 UNJF".

PAGE 2

Under Requirement 2, delete sentence 2 ("Corrosion-resisting... lubricant".) and replace with the following: "Self-locking corrosion-resisting steel nut element shall be silver plated plus solid film lubricant."

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activity:
Army - AV
Air Force - 11

Preparing Activity:
DLA-IS

(Project 5310-2251)

AMSC N/A FSC 5310

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.