
MILITARY SPECIFICATION SHEET

NUT, PLAIN, CLINCH AND NUT, SELF-LOCKING, CLINCH (SELF-CLINCHING, KNURLED COLLAR, FLOATING, 450°F AND 600°F)

This specification is approved for use by all Department and Agencies of the Department of Defense.

The complete requirements for acquiring the nut described herein shall consist of this specification and the latest issue of specification MIL-N-45938.

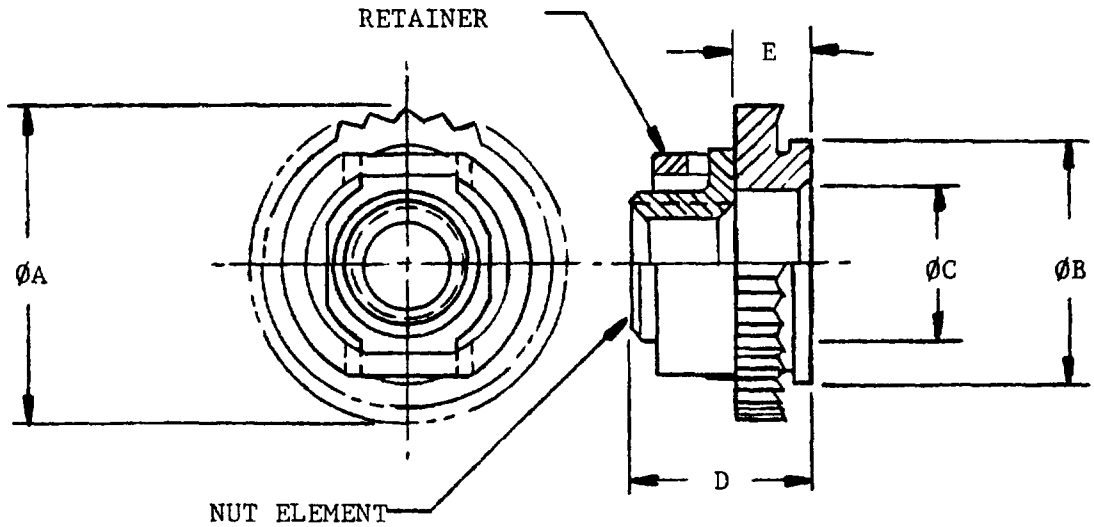

NOTES:

1. Dimensions are in inches.

FIGURE 1. Dimensions and Configuration

TABLE I: Dash number, part dimensions and installation hole dimensions

DASH NUMBERS		THREAD MIL-S-8879 CLASS -3B	A DIA ±.015	B DIA +.001 -.005	C DIA ±.005	D MAX	E ±.010	SHEET THK MIN	HOLE SIZE IN SHEET +.004 -.001
ALLOY STEEL (450°F)	CRES A-286 (600°F)								
2	2C	.1120-40UNJC	.350	.279	.169	.225	.088	.045	.281
3	3C	.1380-32UNJC							
4	4C	.1640-32UNJC	.450	.373	.218	.275	.115	.060	.375
5	5C	.1900-32UNJF				.295			
6	6C	.2500-20UNJC	.560	.498	.281	.365	.141	.090	.500
7	7C	.2500-28UNJC							

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

FSC 5310

REQUIREMENTS:

1. Material: Alloy steel for use in materials with a hardness of 28 HRC max. Corrosion-resisting steel for use in materials with a hardness of 90 HRB max.

2. Protective coating or treatment: Alloy steel nut and retainer shall be cadmium plated plus solid film lubricant. Corrosion-resisting steel nut and retainer shall be cleaned and descaled. Self-locking corrosion-resisting nut elements shall be silver plated plus solid film lubricant.

3. Threads: Threads shall be in accordance with MIL-S-8879 and shall apply before application of solid film lubricant. The upper portion of the nut element shall be deformed to provide self-locking feature.

4. Push-out and torque-out values of alloy steel nuts shall be as specified in Table II or Table III when properly installed in cold rolled steel and in 5052-0 aluminum alloy.

5. Military part number: Consists of the letter M, plus the basic number of the specification sheet plus a dash number taken from Table I plus the letter L for self-locking nut or leave blank if non-locking feature.

Example of Military part number:

M45938/14-2CL

- M45938/14- : Basic number of specification sheet
- 2C : Dash No.
- L : Self-locking

Explanation of part number example:

Nut, floating, self-locking, steel, CRES, A-286, .1120-40UNJC internal thread size, and with self-locking feature.

TABLE II:
Cold rolled steel parent material.

SIZE	APPROX. INSTALL FORCE LB	PUSH-OUT LB MIN	TORQUE-OUT, IN-LB MIN *
.1120	4500	630	22
.1380	4500	630	31
.1640	5500	900	54
.1900	5500	900	67
.2500	8400	1620	112

TABLE III:
5052-0 aluminum alloy parent material.

SIZE	APPROX. INSTALL FORCE LB	PUSH-OUT LB MIN	TORQUE-OUT, IN-LB MIN *
.1120	2600	360	22
.1380	2600	360	31
.1640	3000	450	54
.1900	3000	450	67
.2500	4500	1080	112

* Noted values represent nut element torquing-out of retainer portion of nut, retainer remains in parent material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

RECOMMENDED INSTALLATION PROCEDURES

a. Drill or punch hole. (Corrosion-resisting steel shall be drilled).
b. Locate pilot squarely in hole. Use exit side of punched hole.
c. Using a drive tool and anvil as shown in figure 2, apply sufficient force to cause a .015 inch minimum penetration into the structure for a full 360°. Tool shown is a depth-stop type tool which installs nut to proper depth when nylon stop bottoms against sheet surface. Use of nut manufacturer's drive tool and anvil is mandatory. (Rosan, Inc. Newport Beach, CA - FSCM 83324)

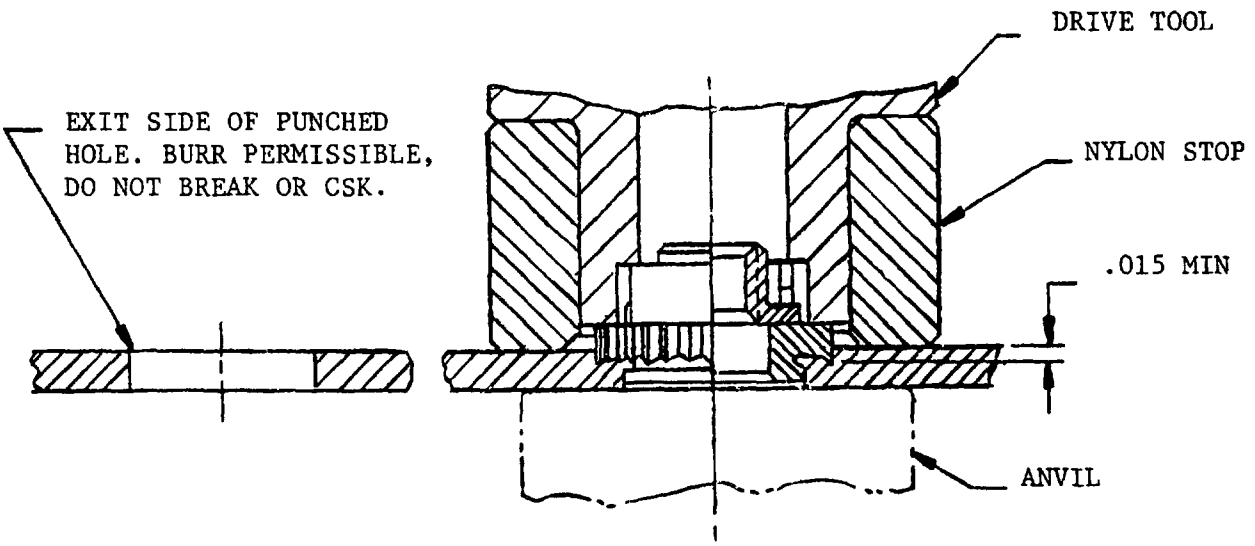


FIGURE 2. Hole preparation and installation

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - AV
Air Force - 11
NSA - NS
DLA - IS

User activities:
Army - MI, ME, AT
Navy - SH, AS, MC
Air Force - 82

Preparing activity:
Army - AR

(Project 5310-1287)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-N-45938/14	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:23Z
Check the source to verify that this is the current version before use.