
MILITARY SPECIFICATION SHEET

NUT, PLAIN, CLINCH AND NUT, SELF-LOCKING, CLINCH (HEXAGON HEAD AND SHANK, SWAGE CLINCH)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the nuts described herein shall consist of this specification and the latest issue of MIL-N-45938.

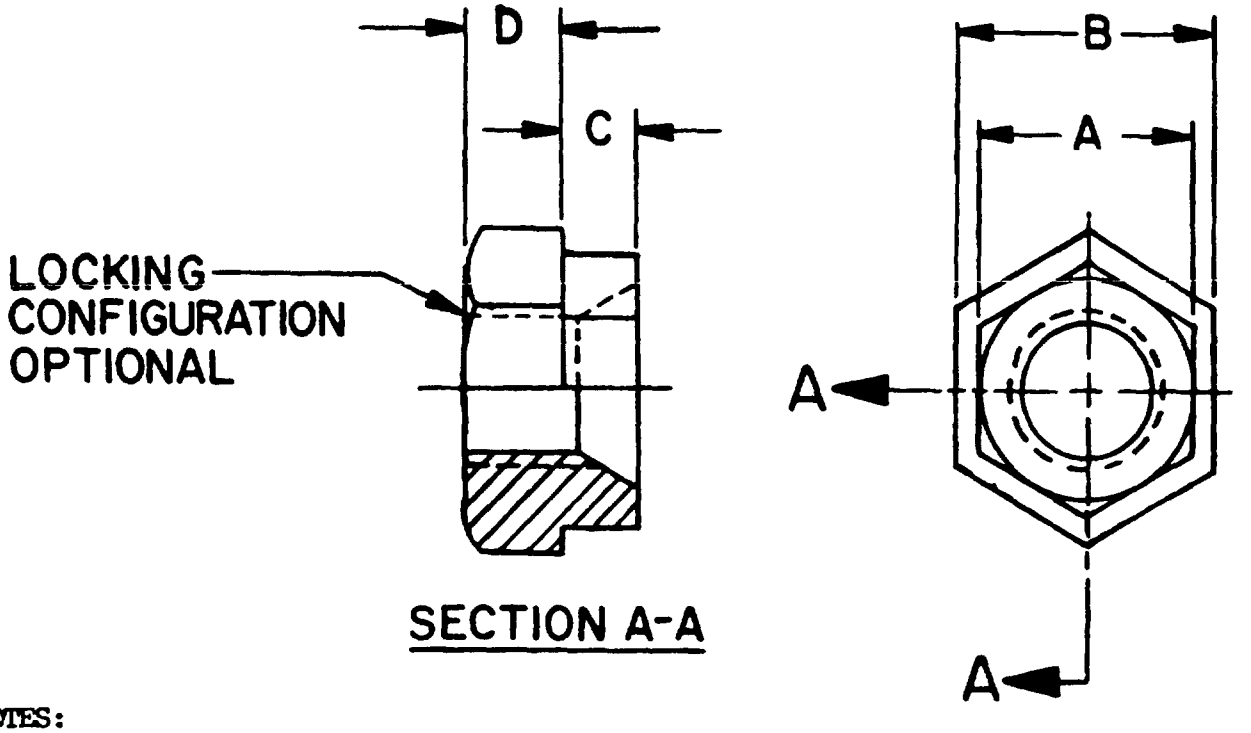

NOTES:
1. All Dimensions are in inches.

FIGURE 1. NUT, PLAIN, CLINCH and NUT,SELF-LOCKING, CLINCH.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202640-22T04:21Z
Check the source to verify that this is the currentversion before use.

Requirements:

1. Material: Steel, Carbon, Type 1008 (UNS G10080), Type 1010 (UNS G10100), Type 1108 (UNS G11080) or Type 1110 (UNS G11100) in accordance with ASTM A549 or ASTM A576 as applicable.

2. Protective Coating and Surface Treatment. Steel, Carbon shall have cadmium plate in accordance with QQ-P-416, Type II, Class 2.

3. Threads: The threads shall be in accordance with MIL-S-7742.

4. Push-Out: Push-out values shall be as specified in Table I when properly installed in low carbon steel sheets.

5. Part Number: The part number shall consist of the letter "M", the basic number of this specification sheet, followed by a dash number taken from Table I. Add suffix letter "L" for self-locking nut.

EXAMPLE: M45938/2-4 L

- Type Code Letter:
  L- Self-Locking
  No code-Plain
- Dash Number
- Specification sheet number

M45938/2-4 indicates: Nut, Plain, Clinch, Carbon Steel, .250-28 UNF-2B thread for sheet or plate with max .062 thickness

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:21Z
Check the source to verify that this is the current version before use.

TABLE I DASH NUMBERS AND DIMENSIONS.

DASH NO.	THREAD -2B	A PILOT WIDTH ACROSS FLATS ±.005	HEX HOLE SIZE IN SHEET, MIN.	B NUT WIDTH ACROSS FLATS ±.005	C PILOT HEIGHT ±.005	D NUT HEIGHT ±.010	SHEET THK, MAX.	PUSH-OUT LBS-MIN
1	.138-32UNC	.244	.250	.297	.078	.109	.036	60
2	.164-32UNC	.305	.312	.368	.094	.125	.047	80
3	.190-32UNF	.305	.312	.368	.094	.125	.047	100
4	.250-28UNF	.429	.438	.521	.125	.172	.062	125
5	.3125-24UNF	.491	.500	.584	.156	.203	.078	150
6	.375-24UNF	.551	.562	.670	.188	.234	.094	200
7	.500-20UNF	.742	.750	.860	.250	.297	.125	300

RECOMMENDED INSTALLATION PROCEDURE

a. Punch Hexagon Hole in sheet per Table I.
b. Insert Hexagon Pilot into hole until shoulder contacts the structure for the full 360°.
c. Insert Flaring Tool into and on top of countersunk end of pilot.
d. Apply Sufficient Force to swage end of pilot over structure, while keeping shoulder in full contact with the structure.
e. Install Screw or Bolt from pilot side of nut.

CUSTODIANS:
Army-AR
Navy-OS

Review Activities:
Army-AV, GL
DLA-IS

User Activities:
Army-AT, ER
Navy-AS, MC, SH

Preparing Activities:
Army-AR

Agent:
DLA-IS

(Project 5310-1515)

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:21Z
Check the source to verify that this is the current version before use.