
MIL-N-45938/4A
17 August 1987
SUPERSEDING
MIL-N-45938/4
30 September 1971

MILITARY SPECIFICATION SHEET

NUT, PLAIN, SELF-CLINCHING FLUSH

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the nuts described herein shall consist of this specification and the latest issue of MIL-N-45938.

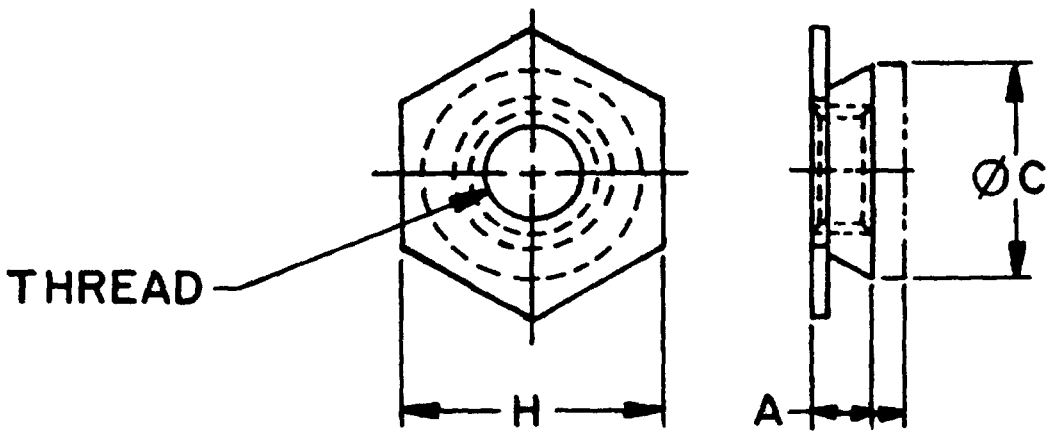

NOTES:
1. All Dimensions are in inches.

FIGURE 1. NUT, PLAIN, SELF-CLINCHING, FLUSH

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Corrosion Resistant Steel, Type 303 (UNS S30300) in accordance with ASTM A581 or ASTM A582, shall be used for all thread sizes.

2. Protective Coating and Surface Treatment. Corrosion Resistant Steel, Type 303 (UNS S30300) shall be cleaned, descaled and passivated in accordance with ASTM A380.

3. Threads: The threads shall be in accordance with MIL-S-7742.

4. Push-Out: Push-out values shall be as specified in Table I when properly installed in a sheet having Hardness of 70 HRB maximum.

5. Part Number: The part number shall consist of the letter "M", the basic number of specification sheet and a dash number taken from Table I.

EXAMPLE: M45938/4-8

- 4 — Dash Number
- 45938/4 — Specification Sheet Number

M45938/4-8 indicates: Nut, Plain, Self-Clinching, Flush, Corrosion Resistant Steel, .164-32 UNC-2B THD. for sheet thickness of .091 and up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:22Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NO.	THREAD -2B	A +.000 -.005	SHEET THICKNESS	HOLE SIZE IN SHEET +.003 -.000	ØC +.000 -.003	H HEX SIZE	CENTER OF HOLE TO SHEET EDGE-MIN	PUSH-OUT LBS-MIN	APPROX. INSTAL-LATION FORCE-LBS
1 2	.086-56UNC	.060 .090	.060-.090 .091-UP	.172	.171	3/16	.23	130	2500
3 4	.112-40UNC	.060 .090	.060-.090 .091-UP	.172	.171	3/16	.23	130	2500
5 6	.138-32UNC	.060 .090	.060-.090 .091-UP	.213	.212	1/4	.27	150	2500
7 8	.164-32UNC	.060 .090	.060-.090 .091-UP	.290	.289	5/16	.28	175	3000
9 10	.190-32UNF	.060 .090	.060-.090 .091-UP	.312	.311	11/32	.31	200	3000
11 12 13	.250-28UNF	.120 .151 .182	.125-.155 .156-.186 .187-UP	.344	.343	3/8	.34	400	4000
14 15	.190-24UNC	.060 .090	.060-.090 .091-UP	.312	.311	11/32	.31	200	3000

RECOMMENDED INSTALLATION PROCEDURE

a. Drill or punch hole per Table I.
b. Locate shank of nut squarely in hole.
c. Apply clinching force between two flat parallel surfaces sufficient only to embed the hexagonal head flush with the structure surface. The shank shall not protrude from the opposite side of the structure.
e. Install screw or bolt from pilot side of nut.

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:22Z
Check the source to verify that this is the current version before use.

Custodians:
Army-AR
Navy-OS

Review Activities:
Army-AV, GL
DLA-IS

User Activities:
Army-AT, ER
Navy-AS, MC, SH

Preparing Activity:
Army-AR

Agent:
DLA-IS

(project 5310-1516)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:22Z
Check the source to verify that this is the current version before use.