INCH-POUND


MIL-N-45938/6C
6 March 1995
SUPERSEDING
MIL-N-45938/6B
25 July 1994

MILITARY SPECIFICATION SHEET

NUT, SELF-LOCKING, CLINCH, (SWAGE-CLINCHING, KNURLED SHANK, MINIATURE, 450°F, OR 800°F)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the nuts described herein shall consist of this specification and the latest issue of MIL-N-45938

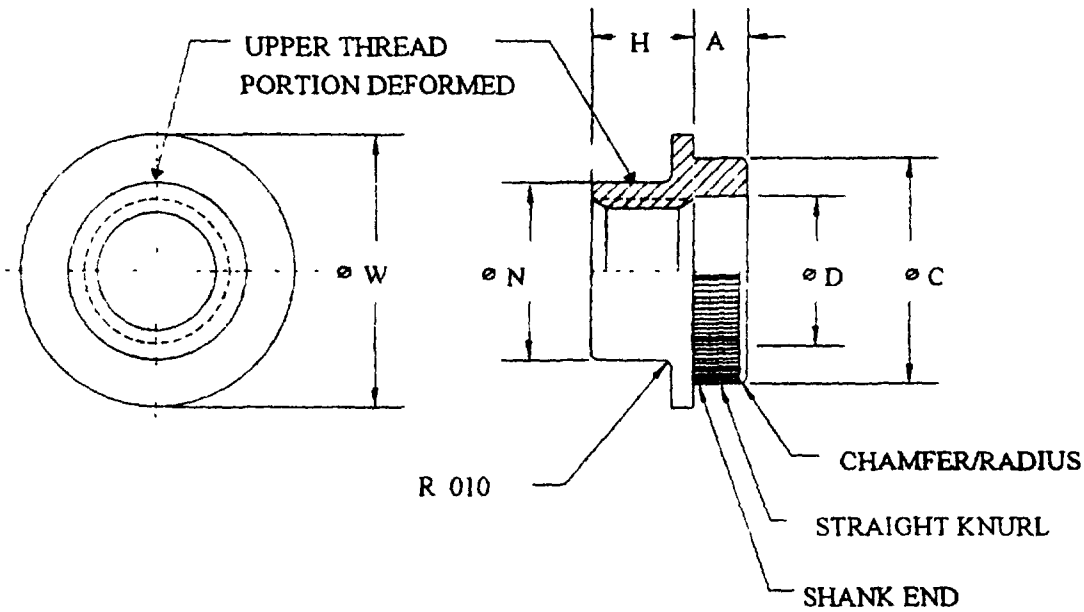

Notes

1. All dimensions are in inches

FIGURE 1 NUT, SELF-LOCKING, CLINCH, (SWAGE-CLINCHING, KNURLED SHANK, MINIATURE, 450°F, or 800°F)

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:22Z
Check the source to verify that this is the current version before use.

TABLE I DASH NUMBERS AND DIMENSIONS

DASH NO			THREAD SIZE	A SHANK LENGTH ± 003	SHEET THICKNESS	DIAMETER HOLE SIZE IN SHEET ± 001	⌀ C ± 002	H ± 010	⌀ N MAX	⌀ W ± 010	⌀ D + 005 - 000
CARBON OR ALLOY STEEL 1/	CRES TYPE 303	CRES TYPE A286									
1P	1S	1C	0860-56 UNJC-3B	040	030 TO 049	125	129	085	118	156	096
2P	2S	2C		060	050 AND UP						
3P	3S	3C	1120-40 UNJC-3B	040	030 TO 049	156	.160	112	154	.203	128
4P	4S	4C		060	050 AND UP						
5A	5S	5C	1380-32 UNJC-3B	040	030 TO 049	188	192	120	182	.234	152
6A	6S	6C		.060	.050 AND UP						
7A	7S	7C	1640-32 UNJC-3B	040	.030 TO 049	219	223	.120	207	.281	178
8A	8S	8C		.060	050 AND UP						
9A	9S	9C	1900-32 UNJF-3B	.040	030 TO 049	250	254	120	231	.328	.210
10A	10S	10C		.060	.050 AND UP						
11A	11S	11C	2500-28 UNJF-3B	040	.030 TO 049	312	316	214	306	.391	255
12A	12S	12C		060	.050 AND UP						

1/ "P" INDICATES GRADE 1018 (UNS G10180) CARBON STEEL ONLY
"A" INDICATES GRADE 4130 (UNS G41300) ALLOY STEEL ONLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1 Material Carbon steel, Grade 1018 (UNS G10180) in accordance with ASTM A510, for sizes .0860 and .1120.
Alloy steel Grade 4130 (UNS G41300) in accordance with ASTM A322.
Corrosion resistant steel Type I (UNS S30300) in accordance with AMS 5640
Heat and Corrosion resistant steel Type A286 (UNS S66286) in accordance with AMS 5734

2 Protective coating and Surface treatment
Carbon and alloy steel Cadmium plated in accordance with QQ-P-416, Type II, Class 3, optional solid film lubricant in accordance with MIL-L-46010, Type I
Type 303 corrosion resistant steel Passivated in accordance with QQ-P-35, optional solid film lubricant in accordance with MIL-L-46010, Type I For solid film lubricant add "F" at the end of the part number
Type A286 heat and corrosion resistant steel Passivated in accordance with QQ-P-35, optional solid film lubricant in accordance with MIL-L-46010, Type I or silver plate in accordance with AMS 2410 Under no circumstances will silver plating and solid film lubricant both be applied to A286 corrosion resistant steel Silver plating shall be indicated by adding "S" at the end of the part number Solid film lubrication shall be indicated by adding "F" at the end of the part number

3 Threads Threads shall be in accordance with MIL-S-8879

4 Push-out and torque-out Push-out and torque-out values shall be as specified in TABLE II when properly installed in low carbon steel sheet

5 Part number The part number consists of the letter "M", the basic number of this specification sheet and a dash number taken from TABLE I, and an additional finish code indicator, if required

Example M45938/6 - 10C S
| | | |_____Additional finish code indicator
| | | "F" = solid film lube
| | | "S" = silver plate (A286 only)
| | |_____Dash number
| |_____Basic number

M45938/6-10CS indicates - Nut, Self-locking, Clinch,(Swage-Clinching, Knurled Shank Miniature, 450°F and 800°F), Type A286 (UNS S66286) corrosion resistant steel, with silver plating

TABLE II PERFORMANCE AND INSTALLATION DATA

THREAD SIZE	PUSH OUT LB (MINIMUM)	TORQUE-OUT IN-LB (MINIMUM)	INSTALLATION FORCE LB MAXIMUM
0860-56 UNJC-3B	20	5	500
1120-40 UNJC-3B	40	5	750
1380-32 UNJC-3B	60	10	1000
1640-32 UNJC-3B	80	15	1500
1900-32 UNJF-3B	100	18	2500
.2500-28 UNJF-3B	125	30	3000

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:22Z
Check the source to verify that this is the current version before use.

RECOMMENDED INSTALLATION PROCEDURE

a Drill or punch hole in sheet (see TABLE I for size)
b Insert nut shank squarely in hole while supporting the structure Place the Punch (see FIG 2) on the nut crown and, use a light hammer blow or small press to force the nut into the structure The nut base must be fully and squarely seated against the structure
c Using the punch to support the nut head, flare the shank outward using the correct tools shown below (see FIG 3 or FIG 4) Do not exceed the installation forces specified in TABLE II
d Install the screw or bolt from the shank end of the nut


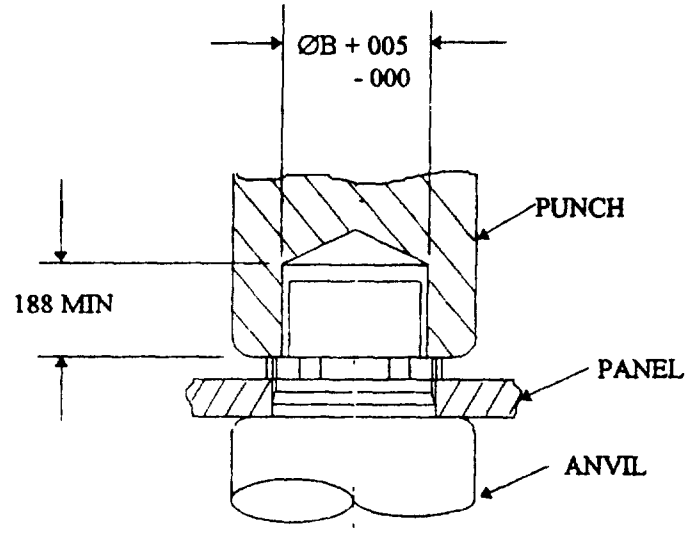



FIGURE 1

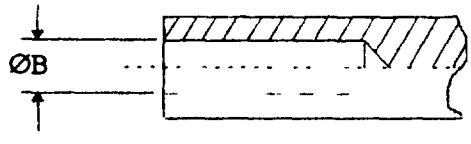


NUT SIZE	ØB + 003 - 000
0860	119
1120	155
1380	183
1640	208
.1900	232
2500	307

PUNCH (MADREL)
FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:22Z
Check the source to verify that this is the current version before use.

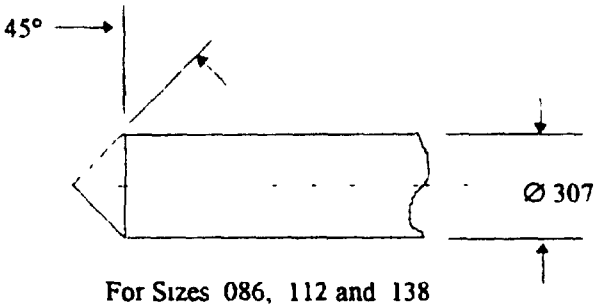


For Sizes 086, 112 and 138

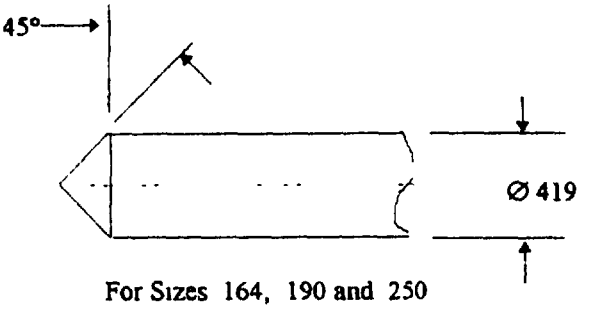

For Sizes 164, 190 and 250

FLUSH FLARING TOOL
(Figure 3)

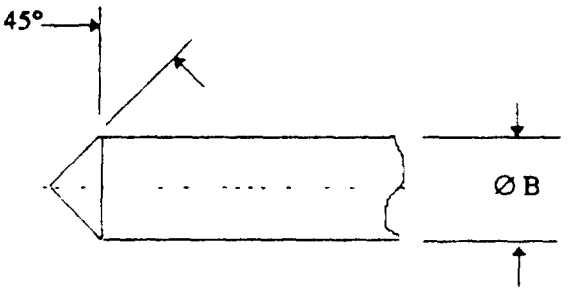

NUT SIZE	ØB +.000 -.002
0860	120
1120	151
1380	183
1640	.214
1900	.245
2500	308

INTERNAL FLARING TOOL
(Figure 4)

6 Changes from previous issue Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes

Custodians
Army - AR
Navy - OS

Preparing activity
DLA - IS

Review activities.
Army - AT, AV, ER, GL, ME
Navy - AS, MC, SH

(Project 5310-2045)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:22Z
Check the source to verify that this is the current version before use.