INCH-POUND


MIL-N-45938/7C
1 DECEMBER 1993
SUPERSEDING
MIL-N-45938/7B
18 July 1988

MILITARY SPECIFICATION SHEET

NUT, PLAIN CLINCH AND NUT, SELF-LOCKING CLINCH (KNURLED COLLAR, MINIATURE, 450°F)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the nuts described herein shall consist of this specification and the latest issue of MIL-N-45938.

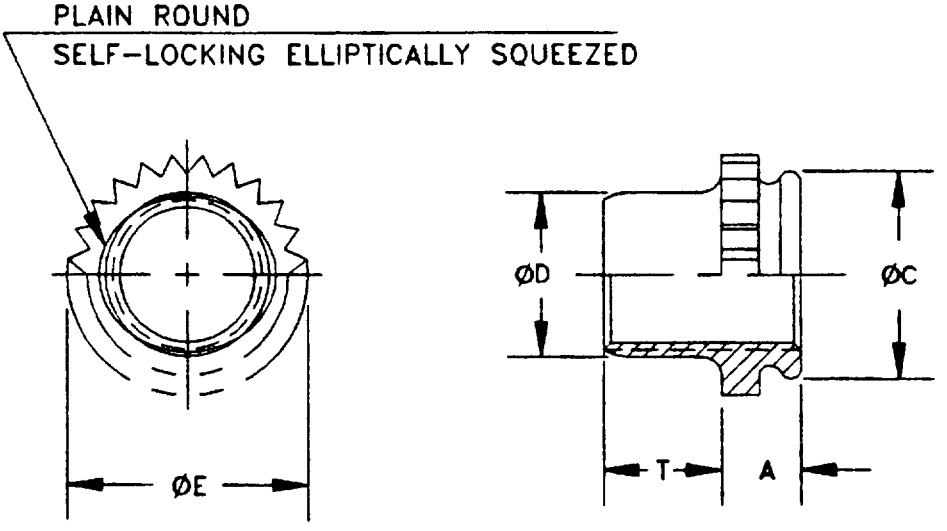

NOTES:
1. All dimensions are in inches.

FIGURE 1. NUT, PLAIN CLINCH AND NUT, SELF-LOCKING CLINCH, (KNURLED COLLAR, MINIATURE, 450°F)

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:22Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER		THREAD SIZE	A	PANEL THICKNESS	HOLE SIZE IN PANEL	Ø C	Ø D	Ø E	T	CENTER OF HOLE TO PANEL EDGE
PLAIN	SELF-LOCKING		+ 000 −.010		+.003 − 000	+.000 −.005	MAX	+ 005 −.005	+ 015 −.000	MIN
00P	00	.060-80 UNJF-3B	.020	.019 TO .022	.110	.109	.076	125	.050	.09
11P	11	.073-64 UNJC-3B	.020	.019 TO .022	.110	.109	090	.125	.050	09
01P	01	.086-56 UNJC-3B	020	.019 TO .022	.144	.143	.104	160	.065	.11
02P	02		.031	.030 TO .036						
1P	1	.112-40 UNJC-3B	.040	.039 TO 045	.172	.171	.145	.192	.065	.14
2P	2		.060	.059 TO .070						
3P	3	.138-32 UNJC-3B	.040	.039 TO .045	.213	.212	.180	244	.075	.17
4P	4		.060	059 TO .070						
5P	5	.164-32 UNJC-3B	.040	039 TO 045	.290	.289	.215	.322	.090	.20
6P	6		.060	.059 TO 070						
7P	7	.190-32 UNJF-3B	.040	.039 TO .045	.290	.289	.245	322	110	.20
8P	8		.060	059 TO .070						
9P	9	.250-28 UNJF-3B	.060	059 TO 070	344	.343	318	.384	120	.28
10P	10	250-20 UNJC-3B								

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T04:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1 Materials. Corrosion resistant steel (UNS S30300) in accordance with AMS 5640, TYPE 1.

2 Protective coating and surface treatment Self-locking nuts shall be cadmium plated per QQ-P-416, Type II, Class 3 followed by a solid film lubricant Type I per MIL-L-46010. On self-locking nuts sizes .086-56 and smaller, nuts shall be passivated followed by a clear dry film lubricant (e.g., carbo wax). Plain nuts shall be passivated only.

3. Screw Threads. Threads shall be the unified J-form class 3 fit in accordance with MIL-S-8879. The method of inspection shall be per FED-STD-H28/20 System 21. The upper threaded portion of the nut shall be deformed to provide self-locking feature, when specified.

4 Push-out and torque-out. Push-out and torque-out values shall be as specified in Table II when properly installed in aluminum, Grade 5052-H34 (UNS A95052) per QQ-A-250/8.

5 Limitations on Usage This fastener is designed for use in materials with a maximum hardness of 70 HRB.

6 Part number The part number consists of the letter "M", the basic number of this specification sheet plus a dash number taken from Table I.

Example: M45938/7-1P

- Dash number
- Specification sheet number

M45938/7-1P - Indicates Nut, Plain, Clinch, Corrosion resistant steel, nominal thread size .112-40, UNJC-3B thread.

M45938/7-1 - Indicates Nut, Self-Locking, Clinch, Corrosion resistant steel, nominal thread size .112-40, UNJC-3B thread.

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:22Z
Check the source to verify that this is the current version before use.

TABLE II. PERFORMANCE/INSTALLATION DATA WHEN INSTALLED IN 5052-H34 ALUMINUM


THREAD SIZE	PANEL THICKNESS	PUSH-OUT LBS 1/		TORQUE-OUT IN LB MIN	APPROXIMATE INSTALLATION FORCE LB
		MEAN	MIN		
.060-80 UNJF-3B	.019 TO .022	35	20	2	750
.073-64 UNJC-3B				3	
.086-56 UNJC-3B	.030 TO 036			4	1000
.112-40 UNJC-3B	039 TO .045	125	88	12	900
	.059 TO .070	170	135		
.138-32 UNJC-3B	.039 TO .045	150	105	20	1200
	.059 TO .070	230	175		1300
.164-32 UNJC-3B	.039 TO .045	190	155	48	1500
	.059 TO .070	330	255	48	
.190-32 UNJF-3B	.039 TO .045	190	155	48	
	.059 TO .070	330	255	48	
.250-28 UNJF-3B	.059 TO .070	410	320	110	2100
.250-20 UNJC-3B					

1/ Mean push-out shall be the sum of sample push-out values divided by the sample size. No one sample value, however, shall be below the minimum push-out specified in this table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T04:22Z
Check the source to verify that this is the current version before use.

RECOMMENDED INSTALLATION PROCEDURE

a Drill or punch hole to correct size (see table I)
b. Locate shank squarely in hole.
c. Apply force between the parallel surfaces of the hardened punch and anvil, as shown below, until the top of the knurled collar is embedded flush with the panel surface.
d Install screw or bolt in shank end of nut.

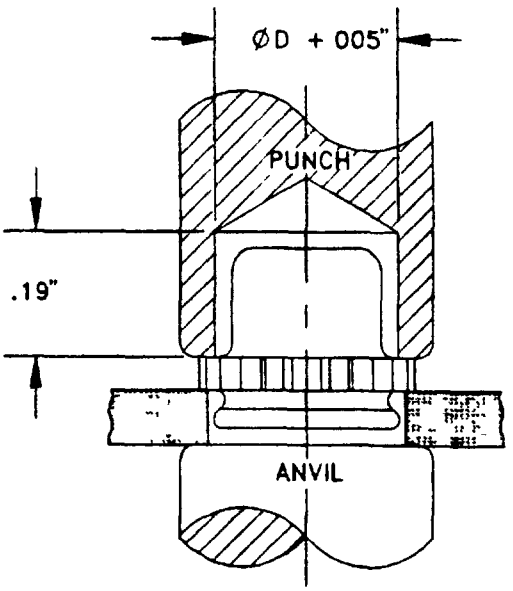

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army-AR
Navy-OS
Air Force-99

Review activities:
Army-AV
Air Force-11, 82
NSA-NS

User activities:
Army-AT, MI
Navy-MC

Preparing activity:
DLA-IS

(Project 5310-1883)

Source: https://assist.dla.mil -- Downloaded: 202610-22T04:22Z
Check the source to verify that this is the current version before use.