[INCH-POUND]
A-A-51174A
December 4, 1996
SUPERSEDING
A-A-51174
December 29, 1987

COMMERCIAL ITEM DESCRIPTION

WHEEL, EXPANDING

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE

1.1 Scope. This commercial item description (CID) covers centrifugal expanding wheels consisting of a rigid metal center with a serrated rubber cover that expands to hold an abrasive-coated band.

1.2 Intended use. Expanding wheels covered by this CID are intended for use on commercial type grinding machines.

2. CLASSIFICATION

2.1 Classification. Expanding wheels shall be of the following types, wheel diameters, face widths, and arbor hole diameters. The type, wheel diameter, face width and arbor hole diameter to be furnished shall be as specified (see 7.2).

Type:	Type I - Expanding serration contact wheel Type II - Expanding serration contact wheel with replaceable tires
Wheel diameter:	Size 1 - 4 inch Size 2 - 5 inch Size 3 - 6 inch Size 4 - 8 inch Size 5 - 10 inch Size 6 - 12 inch Size 7 - 14 inch Size 8 - 16 inch Size 9 - 18 inch

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center Richmond, ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 3460

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

Face width:	Size 1 - 1 inch Size 2 - 1-1/2 inch Size 3 - 2 inch Size 4 - 2-1/2 inch Size 5 - 3 inch Size 6 - 3-1/2 inch Size 7 - 4 inch Size 8 - 5 inch Size 9 - 6 inch
Arbor hole diameter:	Size 1 - 1/2 inch Size 2 - 5/8 inch Size 3 - 3/4 inch Size 4 - 7/8 inch Size 5 - 1 inch Size 6 - 1-1/4 inch

3. SALIENT CHARACTERISTICS

3.1 General requirements. Unless otherwise specified (see 7.2), the rubber hardness of the serrated expander shall be 50 to 60 durometers when tested in accordance with the Type A test method of ASTM D2240. The face and side of the wheels shall run concentric and true with the arbor hole to provide smooth, vibration-free operation. Type I wheels shall be dynamically balanced. Type II wheels shall have the hubs and replaceable tires independently dynamically balanced. The hub shall be constructed of steel or cast aluminum. Unless otherwise specified (see 7.2), the arbor hole threading shall be smooth. Unless otherwise specified (see 7.2), the maximum operating speed of the spindle shall be in accordance with the manufacturer's standard practices.

4. REGULATORY REQUIREMENTS

4.1 Recycled, recovered, or environmentally preferable materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Environmental protection. The item shall meet all applicable Environmental Protection Agency restrictions in effect on the date of the contract. These regulations apply to the emission of materials hazardous to the environment or the user's health and shall be met during the manufacturing, service, transportation, storage, and operation/use of the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING

6.1 Packaging requirements. Preservation, packaging, packing and marking shall be as specified in the contract or order (see 7.2).

7. NOTES

7.1 Source of documents.

7.1.1 Industry standards. Copies of industry standards referenced in this CID may be obtained from the following addresses:

American Society for Testing and Materials (ASTM)

ASTM D2240 Standard Test Method for Rubber Property - Durometer Hardness

Applications for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.


7.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Type, wheel diameter, face width, and arbor hole diameter (see 2.1).
c. Rubber hardness, if different (see 3.1).
d. Arbor hole threading, if not smooth (see 3.1).
e. Maximum operating speed, if specified (see 3.1).
f. Packaging, if different (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

7.3 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

AA51174-XXXX

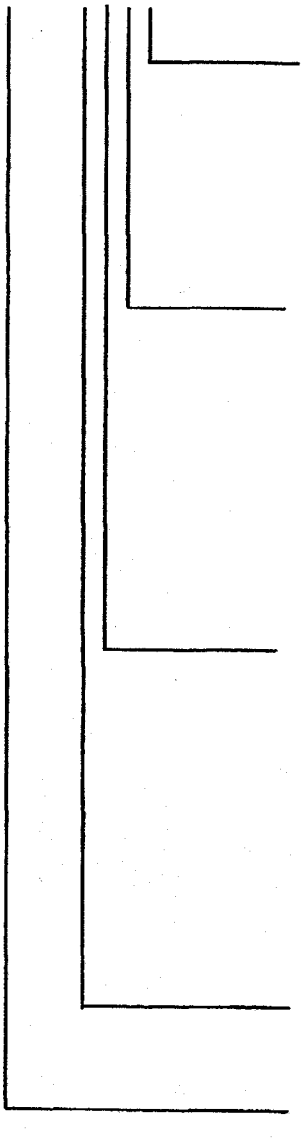

Arbor hole diameter:
1 - Size 1 (1/2 inch)
2 - Size 2 (5/8 inch)
3 - Size 3 (3/4 inch)
4 - Size 4 (7/8 inch)
5 - Size 5 (1 inch)
6 - Size 6 (1-1/4 inch)

Face width:
1 - Size 1 (1 inch)
2 - Size 2 (1-1/2 inch)
3 - Size 3 (2 inch)
4 - Size 4 (2-1/2 inch)
5 - Size 5 (3 inch)
6 - Size 6 (3-1/2 inch)
7 - Size 7 (4 inch)
8 - Size 8 (5 inch)
9 - Size 9 (6 inch)

Wheel diameter:
1 - Size 1 (4 inch)
2 - Size 2 (5 inch)
3 - Size 3 (6 inch)
4 - Size 4 (8 inch)
5 - Size 5 (10 inch)
6 - Size 6 (12 inch)
7 - Size 7 (14 inch)
8 - Size 8 (16 inch)
9 - Size 9 (18 inch)

Type:
1 - Type I
2 - Type II

CID Number

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians
Army - AL
Air Force - 99

Reviewers
Air Force - 84

PREPARING ACTIVITY:
DLA - GS

(Project 3460-0177)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.