COMMERCIAL ITEM DESCRIPTION

SOCKET, TAPER, EXTENSION

The General Services Administration has authorized the use of this commercial item description in preference to Type II, of A-A-51132.

Abstract. This description covers extension sockets which are used to extend the length of a taper shank tool and to adapt tools having larger or smaller taper shanks to the machine spindle nose taper hole. The sockets shall be similar to figure 1.

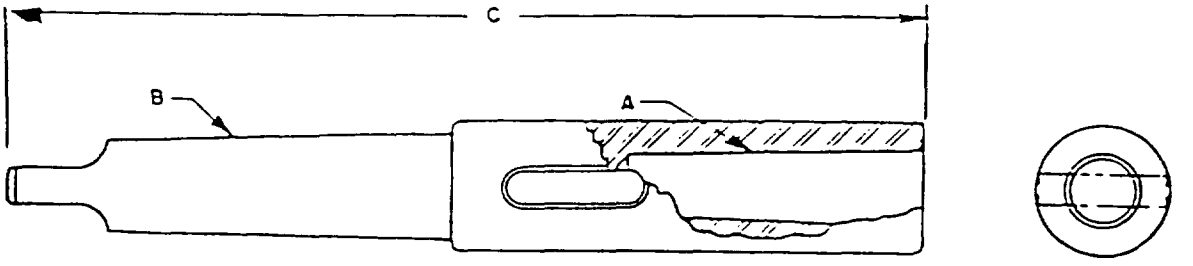


FIGURE I. Socket, taper, extension.

Salient characteristics.

1. Materials. Materials used in the manufacture of the sockets shall be of a quality necessary to produce a product that conforms to the requirements specified herein.

2. Design. The sockets shall have a drift slot and tang. The dimensions of the internal taper, external taper, and diameter at gage line shall conform to American National Standard Self Holding Machine Tapers as described in ANSI B5.10.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSG, 2163 Airways Blvd., Memphis TN 38114-5051.

AMSC N/A FSC 3460

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

4. Socket length. Unless otherwise specified (see ordering data), the length of the socket to be furnished shall be selected from table I. The tolerance shall be ± 1/16 inch.

TABLE I. Socket length.

Socket length 1/ (C)	Length designation 2/	Socket length 1/ (C)	Length designation 2/	Socket length 1/ (C)	Length designation 2/
5-5/8	01	9-15/16	19	13-1/4	37
6-3/16	02	10	20	13-5/16	38
6-1/4	03	10-3/16	21	13-1/2	39
6-13/16	04	10-7/16	22	13-11/16	40
6-15/16	05	10-1/2	23	14	41
7-9/16	06	10-3/4	24	14-11/16	42
7-5/8	07	10-13/16	25	14-15/16	43
7-3/4	08	10-15/16	26	15	44
7-15/16	09	11	27	15-11/16	45
8-3/16	10	11-1/4	28	15-15/16	46
8-1/2	11	11-9/16	29	16-1/4	47
8-9/16	12	11-11/16	30	16-15/16	48
8-5/8	13	11-13/16	31	18-3/16	49
8-15/16	14	11-15/16	32	18-9/16	50
9-3/16	15	12-1/4	33	18-3/4	51
9-7/16	16	12-11/16	34	19-3/16	52
9-1/2	17	12-15/16	35	20-13/16	53
9-5/8	18	13-1/16	36		

1/ Dimensions are in inches.
2/ The length designation is for use in developing the CID based identification number only (see notes).

4. Internal and external taper. Unless otherwise specified (see ordering data), the number of the internal and external tapers of the socket to be furnished shall be selected from table II.

TABLE II. Taper number.

Taper number (A or B)	Taper designation 1/	Taper number (A or B)	Taper designation 1/
1	A	4	D
2	B	5	E
3	C	6	F

1/ The taper designation is for use in developing the CID based identification number only (see notes).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

5. Concentricity. For sockets up to 12 inches in length the external taper shall be concentric with the internal taper within a tolerance of 0.002 inch total indicator reading at a 5 inch projection from the mouth of the socket. For sockets over 12 inches in length the concentricity shall be 0.004 inch.

7. Hardness. Unless otherwise specified (see ordering data), the sockets shall have a minimum hardness of Rockwell C 30 when tested in accordance with ASTM E 18.

8. Finish. The shank taper on the sockets shall have a ground finish.

9. Identification marking. Each socket shall be permanently marked with the manufacturer's name or trademark of such known character that the source of the manufacturer may be identified. They shall also be marked with the number of the inside and outside taper.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Environmental protection. During the manufacture, transportation, storage, or use of the sockets, materials hazardous to the ecological system as prohibited by Federal, state, or local statutes in effect on the date of the contract shall not be used or emitted.

Preservation, packaging, packing, labeling, and marking. Preservation packaging, packing, labeling, and marking shall be as specified in the contract or order.

NOTES

Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

a. Title, number, and date of this commercial item description.

b. Specify length of socket required (see table I).

c. Specify number of external tapers required (see table II).


d. Specify number of internal tapers required (see table II).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

e. Specify hardness, if different (see para. 7).

f. Specify quantity of sockets required.

CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor. The length designation from table I and the taper number designation from table II is for use in developing the part number.

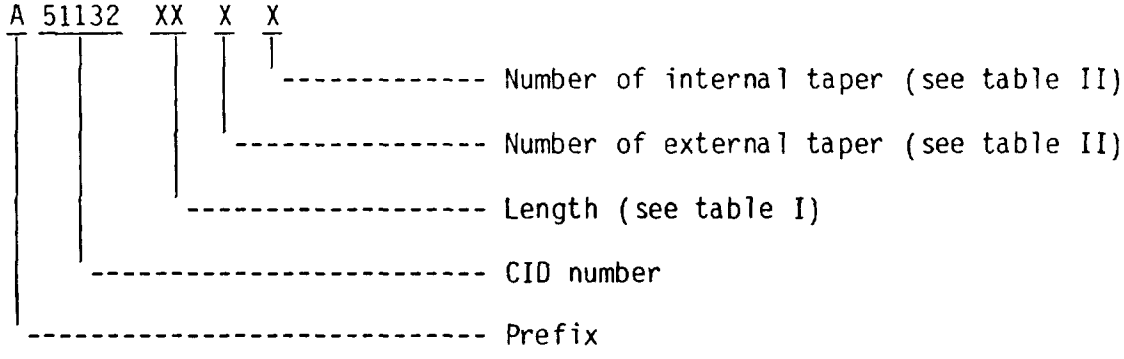

ANSI B5.10 is available from American National Standards Institute, ATTN: Sales Dept., 1430 Broadway, New York, NY 10018-3363.

ASTM E 18 is available from American Society for Testing and Materials, 1916 Race street, Philadelphia, PA 19103-1187.

Supersession data. This commercial item description covers items previously covered in A-A-51132, type II.

MILITARY INTEREST:

Custodian

Army - AL
Navy - YD
Air Force - 99

Review Activities

Air Force - 84
DLA - GS

CIVIL AGENCY COORDINATION ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

DLA - IP

Project 3460-0150

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.