COMMERCIAL ITEM DESCRIPTION

SOCKET, TAPER, REDUCING SLEEVE (BROWN AND SHARPE TAPERS)

The General Services Administration has authorized the use of this commercial item description in preference to Type III, Class 2, of A-A-51132.

Abstract. This description covers sockets with Brown and Sharpe Tapers which are used to adapt small taper shank tools to larger size spindles. The sockets shall be similar to figure 1.

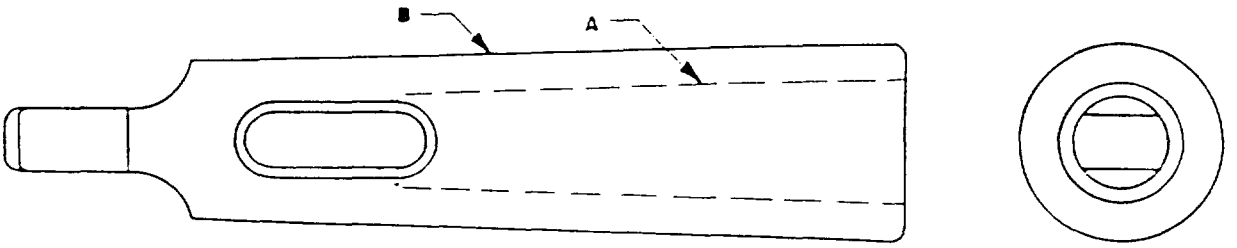


FIGURE I. Socket, taper, reducing.

Salient characteristics.

1. Materials. Materials used in the manufacture of the sockets shall be of a quality necessary to produce a product that conforms to the requirements specified herein.

2. Design. The sockets shall have a drift slot and tang. The dimensions of the internal taper and external taper shall conform to table A, of appendix to ANSI B5.10.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSG, 2163 Airways Blvd., Memphis TN 38114-5051.

AMSC N/A FSC 3460

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

3. Internal and external taper. The number of the internal and external taper of the socket to be furnished shall be selected from the following list:

Internal tapers	External tapers
4	5
5	6
6	7
7	8
8	9
9	10
10	11
11	12

The number of the internal and external taper shall be as specified (see ordering data).

4. Socket length. Unless otherwise specified (see ordering data), the length of the socket to be furnished shall be the manufacturers standard length as identified on their part drawing.

5. Concentricity. The external taper shall be concentric with the internal taper within a tolerance of 0.002 inch total indicator reading at a 5 inch projection from the mouth of the socket.

6. Hardness. Unless otherwise specified (see ordering data), the sockets shall have a minimum hardness of Rockwell C 30 when tested in accordance with ASTM E 18.

7. Finish. The external taper shall have a ground finish.

8. Identification marking. Each socket shall be permanently marked with the manufacturer's name or trademark of such known character that the source of the manufacturer may be identified. They shall also be marked with the number of the inside and outside taper.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this commercial item description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

Environmental protection. During the manufacture, transportation, storage, or use of the sockets, materials hazardous to the ecological system as prohibited by Federal, state, or local statutes in effect on the date of the contract shall not be used or emitted.

Preservation, packaging, packing, labeling, and marking. Preservation packaging packing, labeling, and marking shall be as specified in the contract or order.

NOTES

Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

a. Title, number, and date of this commercial item description.

b. Specify number of internal taper required (see para. 3).

c. Specify number of external taper required (see para. 3).

d. Specify length, if different (see para. 4).


e. Specify hardness, if different (see para. 6).

f. Specify quantity of sockets required.

ANSI B5.10 is available from American National Standards Institute, ATTN: Sales Dept., 1430 Broadway, New York, NY 10018-3363.

ASTM E 18 is available from American Society for Testing and Materials, 1916 Race street, Philadelphia, PA 19103-1187.

CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor. For purposes of developing the identification number, single digit numbers shall be prefixed with a zero.

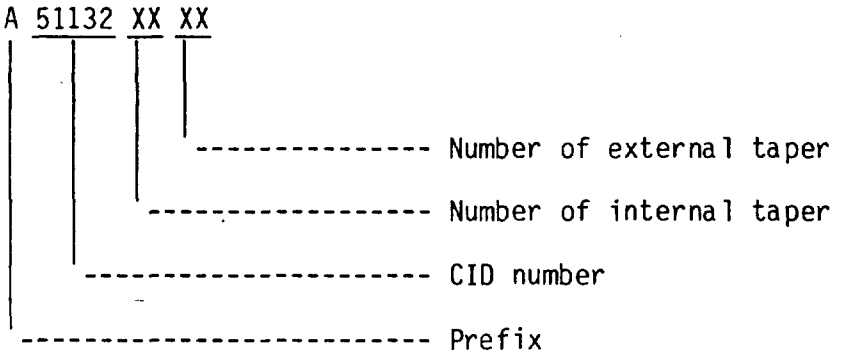

Supersession data. This commercial item description covers items previously covered in A-A-51132, type III, class 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST:

Custodian

Army - AL
Navy - YD
Air Force - 99

Review Activities

Air Force - 84
DLA - GS

CIVIL AGENCY COORDINATION ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

DLA - IP

Project 3460-0154

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.