[INCH-POUND]
A-A-51195A
2 June 1998
SUPERSEDING
A-A-51195
19 February1991

COMMERCIAL ITEM DESCRIPTION

PRESS, ARBOR, "C" FRAME HYDRAULIC, HAND OPERATED

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers both "C" (gap) and "4" post frame type hydraulic bench or pedestal mounted, hand operated, arbor presses of the standard commercial type, which are used to force arbors into and out of holes or to assemble and disassemble press fit parts.

2. CLASSIFICATION. The presses shall be of the following types and sizes (see 7.3):

Type:

Type I – "C" (gap) frame
Type II – "4" post frame

Size:

Size 10 – 10 ton
Size 25 – 25 ton

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center Richmond, ATTN.: DSCR-VBD, Richmond, VA 23297-5610

AMSC N/A FSC 3444

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Frame. The frame shall be of the "C" (gap) or "4" post frame type. When only one style frame is acceptable, the particular style required shall be specified in the contract or order. The frame shall support the hydraulic system and ram assembly. The frame shall provide a means for securing the press to a bench or pedestal. The ram shall be perpendicular to the table surface to an accuracy of 0.025 inch total indicator reading (TIR) per 6 inches of ram travel. The table shall have an opening aligned with the ram axis that will allow passage of the arbor.

3.2 Hydraulic system. The hydraulic system shall consist of a hand operated pump, a fluid reservoir, a cylinder with ram, and the necessary fittings and hoses to ensure a complete hydraulic system. Unless otherwise specified in the contract or order (see 7.3), the system shall be equipped with a single acting cylinder. The system shall have overload protection and a means of preventing extension of the ram beyond its normal end-of-stroke position. Unless otherwise specified in the contract or order (see 7.3), the stroke length of the ram shall be 10 1/8 inches. A pressure gauge calibrated to read tons of ram force shall be provided.

3.3 Bolster plate. "C" (gap) frame presses shall be provided with a circular bolster plate having not less than four equally spaced slots of varying widths for the passage of an arbor. The bolster plate shall be removable and shall allow the desired plate slot to be positioned below the ram.

3.4 Radius of work. The radius of work is defined as the distance from the center of the ram to the frame. Unless otherwise specified in the contract or order (see 7.3), the radius of work for the press to be furnished shall be selected from table I. The tolerance of the radius of work shall be ± 0.5 inch.

TABLE I. Radius of work.

Radius of work designation	Radius of work (in)
A	6.500
B	8.000
C	9.000
D	9.500

NOTE: Largest diameter of work is two times the radius. The radius of work designation is for use in developing the CID based part identification number only (see 7.1).

3.5 Vertical capacity. The vertical capacity is defined as the distance when measured from top of table surface to ram (ram up). Unless otherwise specified in the contract or order (see 7.3), the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

vertical capacity for the press to be furnished shall be as specified and selected from table II. The tolerance of the vertical capacity shall be ± 1.0 inch.

TABLE II. Vertical capacity.

Vertical capacity designation	Distance ram to table (in.)
1	9.500
2	15.000
3	15.375
4	16.500
5	20.250

NOTE: The verticle capacity designation is for use in developing the CID based part identification number only (see NOTES, 7.1).

3.6 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Environmental protection. During the manufacture of the press, materials hazardous to the ecological systems as prohibited by the Federal, State or local statutes in effect on the date of the contract shall not be used or emitted.

5. QUALITY ASSURANCE

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description; conform to the producer’s own drawings, specifications, standards and quality assurance practices; and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order (see 7.3).

7. NOTES

7.1 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

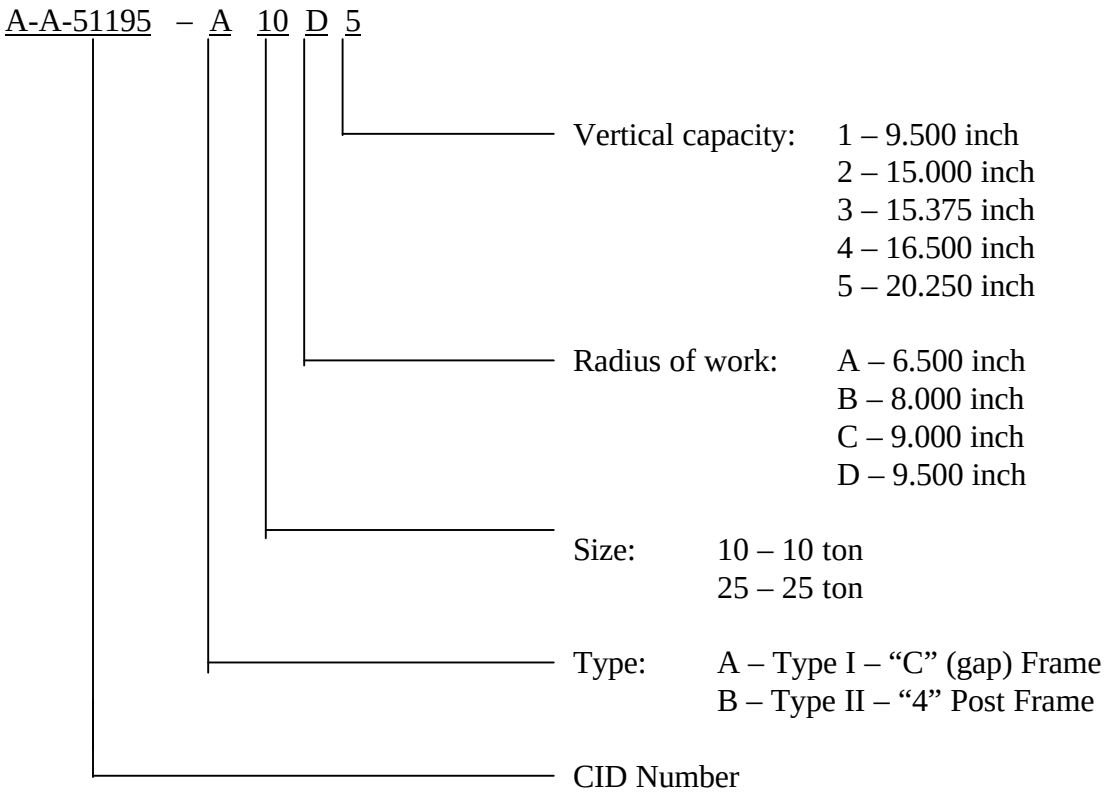

7.2 Reference documents.

7.2.1 FED-STD-376 is available for the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

7.2.2 Federal Acquisition Regulations (FAR) maybe obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.3 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.

a. Title, number, and date of this CID.
b. Type (see 2).
c. Size (see 2).
d. Radius of work, if different (see 3.4).
e. Vertical capacity, if different (see 3.5).
f. Dual acting cylinder, if required (see 3.2).
g. Quantity required.
h. Preservation, packing, and marking requirements.
i. Stroke length, if different (see 3.2).

7.4 Intended use. Presses covered by this commercial item description are for use in machine production, repair and maintenance shops.

7.5 National stock numbers (NSNs). The following NSNs correspond to this CID. The list is not indicative of all possible NSNs associated with this document.

NSN	Old Pin	New Pin
3442-01-131-9731	A511951033	A51195B10C3
3442-01-187-4414	A511952551	A51195A25A5
3442-01-148-0506	A511951031	A51195B10A4
3444-01-140-5702	A511951033	A51195B10C3

MILITARY INTERESTS:

Custodians
Army - AL
Navy – SH
Air Force - 99

Reviewers
Navy - YD
Air Force - 84

CIVIL AGENCY COORDINATION ACTIVITY
GSA - FSS

PREPARING ACTIVITY:
DLA - GS

(Project 3444-0033)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:52Z
Check the source to verify that this is the current version before use.