REVIEW INTEREST: DGSC, 69
USER INTEREST: TD, ATAC

FED. SUP CLASS
2805

STAMP ARROW AS SHOWN ON PISTON .002-.010 DEEP, .4 LONG AND .3 FROM EDGE IN DIRECTION OF CRANKSHAFT ROTATION.

CENTER DRILL POINT MARK PERMISSIBLE

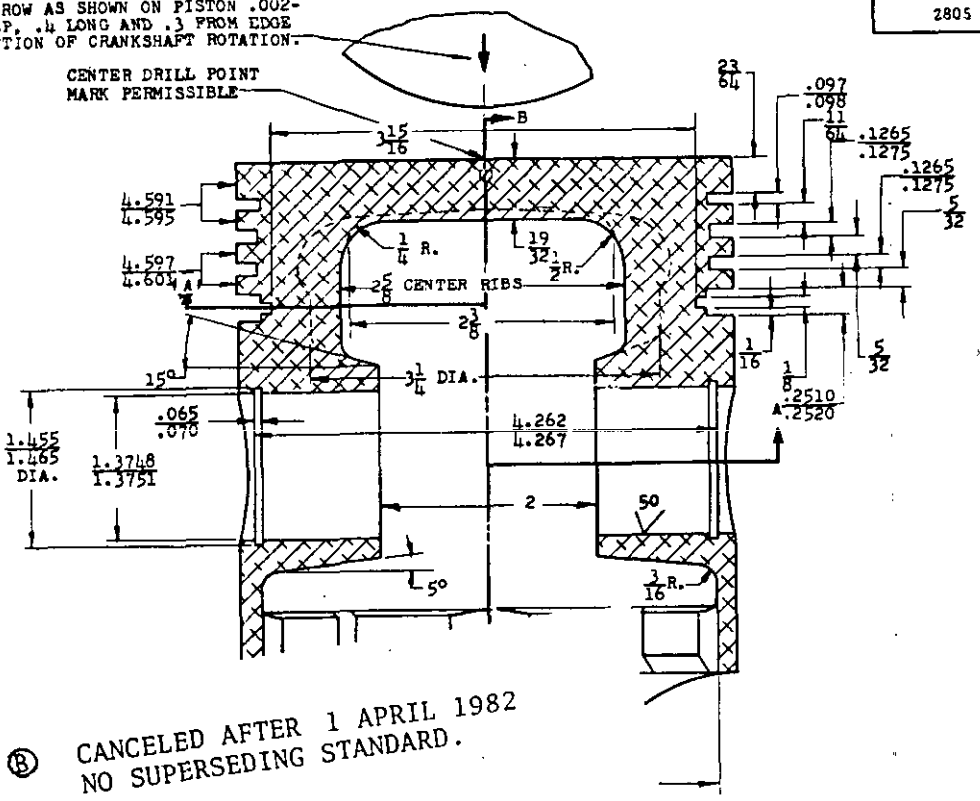

Ⓑ CANCELED AFTER 1 APRIL 1982
NO SUPERSEDING STANDARD.

RING 1
EFFECT

SIDES
RUN TR
BORE W

BALANCING.

PIN HOLE MUST BE SQUARE WITH SKIRT AXIS WITHIN .0005 INCH PER INCH OF SKIRT LENGTH.

FINISHED PIN BORE TO BE FREE OF TIN PLATING.

SERVICE PISTONS TO BE FURNISHED WITH PIN FITTED .0001 TIGHT/ .0002 LOOSE AND WITH PIN RETAINERS.

JIGGING BOSSES OR NOTCHES PERMISSIBLE AS QUALIFIED.

PISTON PIN RETAINING RING GROOVE TO HAVE SHARP CORNERS.

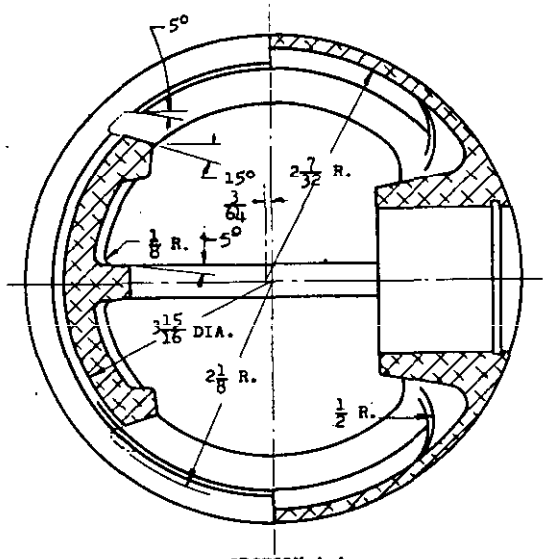

SECTION A-A

WT. OF FIN. PISTON:
1150 GRAMS ±4 GRAMS.

APPROVED 28 OCTOBER 1965 REVISED Ⓐ 15 DEC 1965 Ⓑ 1 APRIL 1982

Ⓐ ENTIRE STANDARD REVISED

PART NO. MS 13886-1

P.A. MO (ERDL) Other Cust A.F. - 69 NAVY - YD	TITLE PISTON, INTERNAL COMBUSTION ENGINE: 4-5/8" x 5-1/4"	MILITARY STANDARD MS 13886
PROCUREMENT SPECIFICATION MIL-E-11275	SUPERSEDES:	SHEET 1 OF 4

DD FORM 672-1 (Coordinated)

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:30Z
Check the source to verify that this is the current version before use.