FED. SUP CLASS
5935

User activities: Army - AR, MI
Navy - YD, AS
Air Force -

Review activities: Army -
Navy - MC
Air Force - 11, 17, 99
DLA - ES

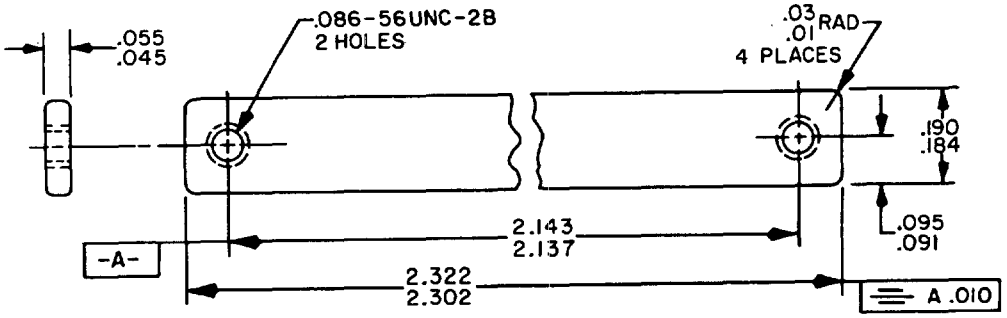

INCHES	MM
.010	.25
.015	.38
.03	.8
.045	1.14
.055	1.40
.086	2.18
.091	2.31
.095	2.41
.184	4.67
.190	4.83
2.137	54.28
2.143	54.43
2.302	58.47
2.322	58.98

DESIGN STANDARD FOR USE WITH MIL-C-28754/17

NOTES:
1. Dimensions are in inches.
2. Break sharp edges .015 maximum.
3. Material: AISI 304 ANL, pickled, bright, CR or per QQ-S-766, CL 304, Cond. A, Fin. 2B.
4. Passivate as specified in QQ-P-35, type optional.
5. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
6. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 (.3 mm) for two place decimals and ±2° for angles.
7. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

Ⓑ denotes changes

APPROVED 4 Sep 1975 REVISED Ⓐ 16 Apr 76 Ⓑ 30 April 1979

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY - EC Other Cust AF - 85 ARMY - CR		CLAMP, CABLE	MS14060
Procurement Specifications NONE	SUPERSEDES: Drawing 2825810 Code Ident 10001		PAGE 1 OF 1

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-3036-50

☆U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/2737

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.