FED. SUP CLASS
5950

RATINGS

STYLE	LT4
GRADE	1
CLASS	B
MAXIMUM OPERATING TEMPERATURE	125°C
TEMPERATURE RISE	35°C
AMBIENT TEMPERATURE	90°C
WORKING VOLTAGE	535 VOLTS
TERMINAL PULL	5 POUNDS
ALTITUDE	70,000 FEET

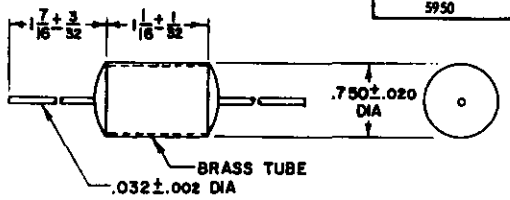

ALL DIMENSIONS IN INCHES

ELECTRICAL CHARACTERISTICS (INITIAL)

Dash No. 1/	Type designation	Replaced MS part no. for MS16443 Rev. C	Replaced type designation and MS part no. for MS16443 Rev B: Type designation	Replaced type designation and MS part no. for MS16443 Rev B: Part No.	Inductance	Q min.	Test frequency	Self-resonant frequency min.	DC resistance max.	Rated dc current 2/
					uh			Mc	Mc	Ohms	ma
-1	LT4K149	MS16443-1	LT7K058	MS16443-1	500 ± 5%	50	.790	4.00	5.5	330
-2	LT4K150	MS16443-2	LT7K059	MS16443-2	1 ± 5%	45	.790	2.60	8.0	275
-3	LT4K151	MS16443-3	LT7K060	MS16443-3	[illegible]	50	.250	1.90	10.0	245
-4	LT4K152	MS16443-4	LT7K061	MS16443-4	[illegible]	50	.250	1.60	12.0	225
-5	LT4K153	MS16443-5	LT7K062	MS16443-5	[illegible]	50	.250	1.40	14.0	210
-6	LT4K154	MS16443-6	LT7K063	MS16443-6	[illegible]	50	.250	0.85	21.0	170
-7	LT4K155	MS16443-7	LT7K064	MS16443-7	[illegible] ± 5%	70	.079	0.54	26.0	155
-8	LT4K156	MS16443-8	LT7K065	MS16443-8	[illegible] ± 5%	70	.079	0.45	33.0	135
-9	LT4K157	MS16443-9	LT7K066	MS16443-9	1,000 ± 5%	70	.079	0.38	39.0	125

1/ The dash number added to the MS [illegible] number constitutes the MS part number; for example MS18117-1.

2/ For the overload test, the [illegible] and 1-1/2 times the rated dc current.

CANCEL AFTER 25 AUG 72
NO SUPERCEDING DOCUMENT

(A) **ELECTRICAL CHARACTERISTICS (FINAL)**

Inspection group	Allowable variation from initial measurement: Inductance	Q	Self-resonant frequency	DC resistance
	Percent	Percent	Percent	Percent
Qualification inspection:				
Group II	2	20	2	2
Group III	2	10	2	2
Acceptance inspection:				
Group B	2	10	2	2
Group C	2	10	2	2

NOTES:

1. THE BAROMETRIC-PRESSURE TEST (TEST-CONDITION LETTER C) IS APPLICABLE.
2. INITIAL INSULATION-RESISTANCE TEST, AND INSULATION-RESISTANCE MEASUREMENTS FOLLOWING OTHER TESTS, ARE APPLICABLE.
3. THE TEMPERATURE-RISE, TERMINAL-TWIST, AND SHOCK (METHOD I, CONDITION C, 50G) TESTS ARE APPLICABLE.
4. THE POLARIZING VOLTAGE DURING THE MOISTURE-RESISTANCE TEST IS APPLIED WITH THE POSITIVE LEAD CONNECTED TO THE COIL TERMINALS TIED TOGETHER, AND THE NEGATIVE LEAD CONNECTED TO THE METAL STRAP.
5. REFERENCED DOCUMENT SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENT REFERENCED HEREIN.
7. VIBRATION-TEST II, TEST CONDITION B, IS APPLICABLE, IN ADDITION UNITS SHALL BE RIGIDLY MOUNTED BY THE BODY.

This standard has been approved by the Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 20 Jan 1964 REVISED (A) 25 Aug 1972

P.A. MI Other Cust EL ASD	TITLE COILS, RADIOFREQUENCY, METAL ENCASED, TYPES LT4K149 TO LT4K157, INCL.	MILITARY STANDARD MS18117	
PROCUREMENT SPECIFICATION MIL-C-15305	SUPERSEDES: MS16443	SHEET 1 OF 1	

5950-0434-1

☆ U. S. GOVERNMENT PRINTING OFFICE: 1972 -714-537/1280

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.