This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army - Navy - Air Force -

Reviewer activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA-ES

FED. SUP CLASS
5935

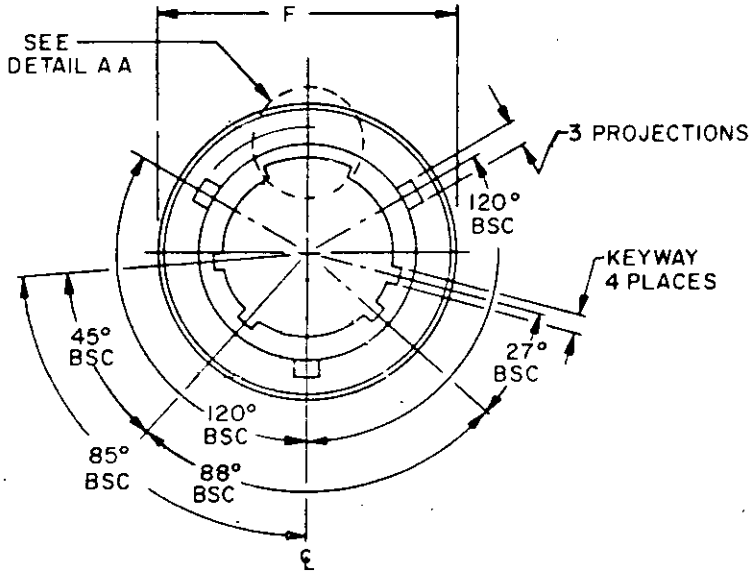

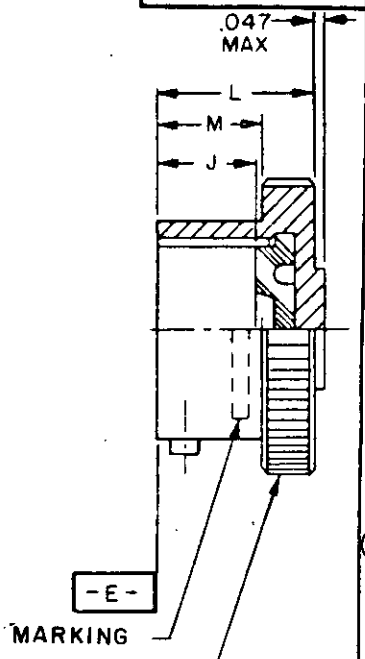

FOR DETAILS OF CAP FRONT END CONFIGURATION SEE PROCUREMENT SPECIFICATION.

SHELL SIZE	F MAX DIA	J +.010 −.015	L MAX	M +.031 −.000	X BSC DEG	Y BSC DEG
-9	.812	.567	.875	.599	77°	113°
-11	.938				67°	123°
-13	1.062				63°	127°
-15	1.188				61°	129°
-17	1.312				65°	125°
-19	1.438					
-21	1.562					
-23	1.688				69°	121°
-25	1.812					

EXAMPLE OF PART NUMBER

MS20048 B 13

MS NO — FINISH — SHELL SIZE

INACTIVE FOR DESIGN AFTER 13 SEPTEMBER 1977

INTERCHANGEABILITY RELATIONSHIP [illegible] identified by the same dash [illegible] are universally, functionally, [illegible]interchangeable.

CANCELED-FOR PROCUREMENT USE MS27501 STYLE A

(J) DENOTES CHANGES

APPROVED 12 FEB 65 REVISED (F) 13 AUG 74 (G) 2 JAN 1976 (H) 13 SEP 1977 (J) 10 FEB 81

P.A. AF-85 Other Cust ARMY-CR NAVY-AS	International interest	TITLE COVER, PROTECTIVE, ELECTRICAL CONNECTOR PLUG, BAYONET COUPLING, SERIES I	MILITARY STANDARD MS20048
Procurement Specification MIL-C-38999		SUPERSEDES: MS 20048 (USAF)	PAGE 1 OF 1

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3172-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:21Z
Check the source to verify that this is the current version before use.

* U.S. GOVERNMENT PRINTING OFFICE: 1981 -- 703-023/1087