FED. SUP CLASS.
5945

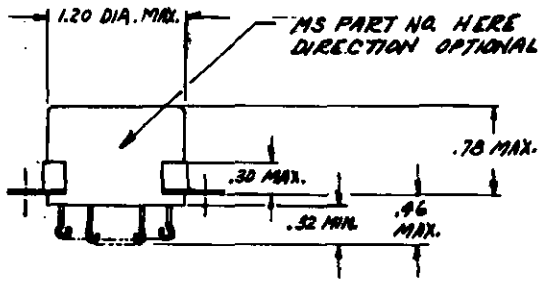



SCHEMATIC
UNENERGIZED POSITION
BOTTOM VIEW

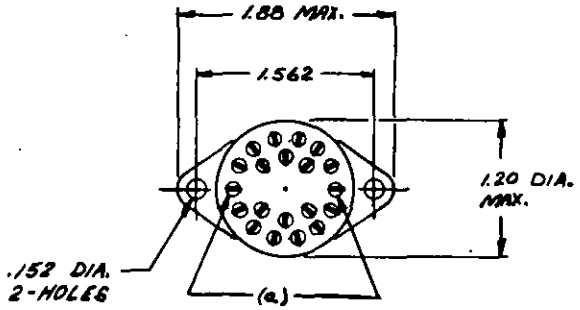

MS PART NO.	FIIN
MS 24245-1	

(A) **CANCELLED AFTER** 23 SEPTEMBER 1965
INTERCHANGEABILITY RELATIONSHIP — THE CANCELLED MS 24245-1 PART CANNOT ALWAYS REPLACE THE MIL-R-5757/1 PART NO. M5757/1-011 AND SHOULD BE USED UNTIL THE EXISTING STOCK IS DEPLETED.

(a) THE COIL TERMINAL BEADS SHALL BE OF A BLUE COLOR.

A WIRING DIAGRAM SHALL BE PERMANENTLY MARKED ON THE RELAY CASE.

DEGASSING IS REQUIRED.

THIS RELAY CAN BE USED IN PLACE OF MS 24115-6.

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED:
TOLERANCE: TWO PLACE DECIMALS ±.03.
THREE PLACE DECIMALS ±.010.

DETAIL REQUIREMENTS	
CONTACT BOUNCE	200 MICROSECONDS MAX.
CONTACT RATING RESISTIVE	26.5 VDC, 2 AMPERES
NORMAL OPERATING COIL VOLTAGE	26.5 VDC
COIL RESISTANCE	250 OHMS MINIMUM
ELECTRICAL TERMINAL STRENGTH TEST	APPLY 5 ±.5 LB.
OPERATE TIME NORMALLY OPEN CONTACTS	15 MILLISECONDS MAX. AT ROOM TEMPERATURE NOMINAL COIL VOLTAGE
RELEASE TIME NORMALLY CLOSED CONTACTS	10 MILLISECONDS MAX. AT ROOM TEMPERATURE NOMINAL COIL VOLTAGE
AMBIENT TEMP. RANGE	CLASS B
MECHANICAL SHOCK	TYPE II
VIBRATION	GRADE 3
WEIGHT	.17 LBS. MAX.

APPROVED 23 DEC 58 REVISED (A) 23 SEP 65

THIS STANDARD HAS BEEN APPROVED BY THE DEPARTMENT OF THE AIR FORCE AND IS MANDATORY FOR USE BY THAT DEPARTMENT. ALL OTHER MILITARY ACTIVITIES ARE REQUIRED TO EMPLOY THIS STANDARD WHERE SUITABLE.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

CUSTODIANS	OTHER INT.
Air Force 11	A - N - NF -

MILITARY STANDARD

RELAY - GENERAL PURPOSE, DC, 6PDT, 2 AMP., HERMETICALLY SEALED

MS 24245 (USAF)

PROCUREMENT SPECIFICATION: MIL-R-25019
SUPERSEDES:
SHEET 1 OF 1

DD FORM 672-1
1 OCT 52

Source: https://assist.dla.mil — Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.