FED. SUP CLASS.
2530

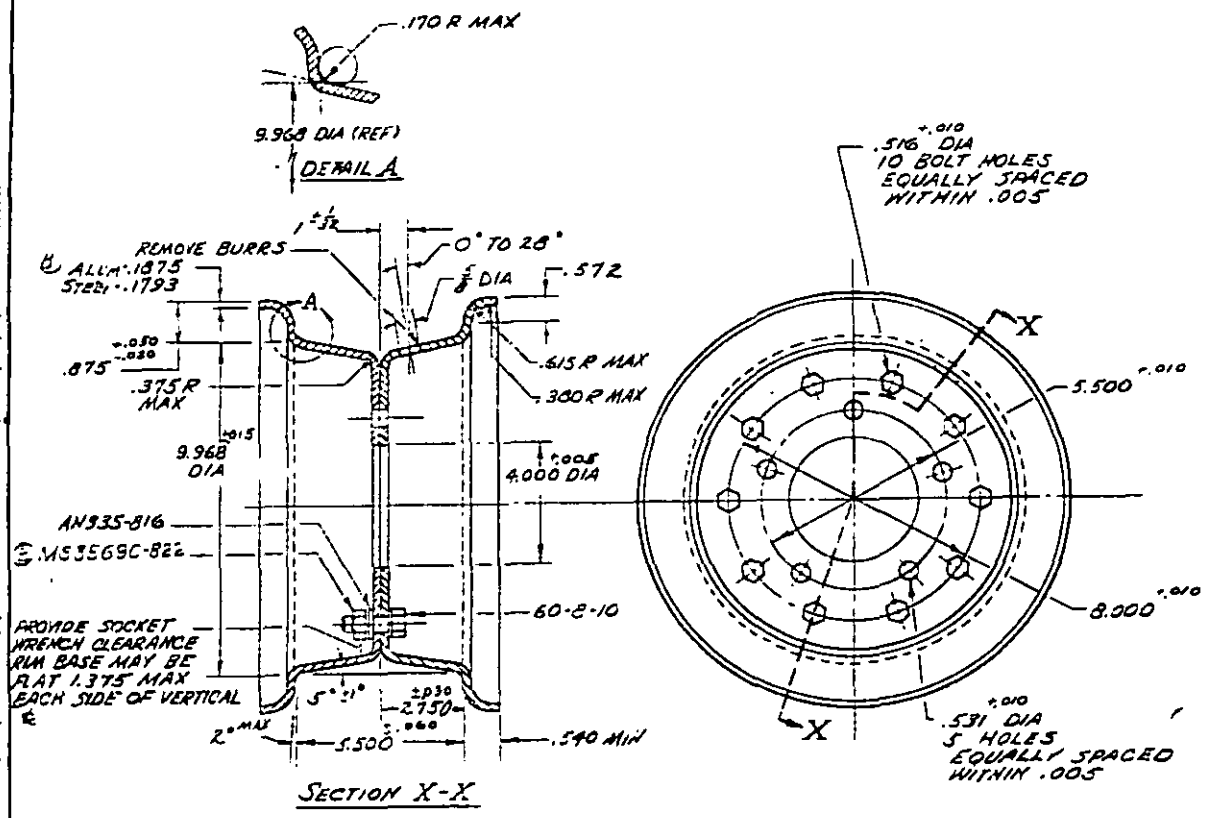

(B) THIS SHALL BE A DEMOUNTABLE TYPE WHEEL WHICH CAN BE REMOVED FROM THE HUB WITHOUT DEFLATING THE TIRE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, FRACTIONS ±1/64.

(B)

MS PART NO.	MATERIAL
MS 24326 -1	STEEL
MS 24326 - 2	ALUMINUM ALLOY

(A) FEDERAL ITEM IDENTIFICATION NO.

SHALL FIT HUBS, MS 24328 & MS 24330, EXCEPT 9.00-10 SIZE USED ONLY WITH MS 24328. SEE MS 24322.

NOTE:
THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 30 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

(B)

APPROVED 12 JUNE 1956 REVISED (A) 16 JUL 1959 (B) 5 SEP 1962

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

R.A. MEM. OTHER CUST. DOCAS ORD.	OTHER INT. ARMY-QMC NAVY-WEPS SEA MC	MILITARY STANDARD WHEEL FOR 7.50-10 & 9.00-10 TIRES	MS24326
PROCUREMENT SPECIFICATION MIL-W-9005		SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.