FED. SUP CLASS
1560

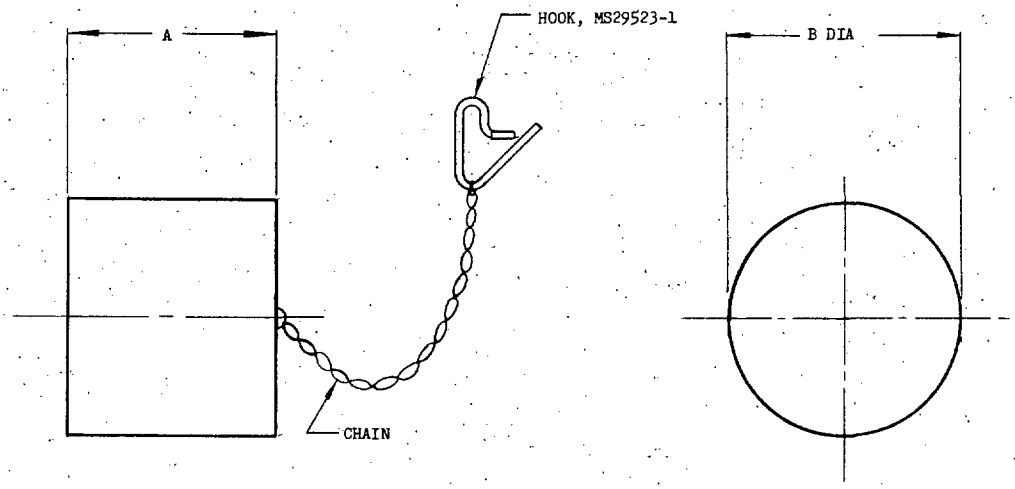

DASH NO.	A MAX	B MAX	MAX WEIGHT LB	FOR USE WITH ADAPTER
-1	1.75	2.00	.25	MS24476-1
-2	2.12	2.50	.35	MS24476-2

DIMENSIONS IN INCHES.
THIS OUTLINE REPRESENTS THE MAXIMUM ENVELOPE OF THE CAP UNLESS OTHERWISE SPECIFIED.

CHAIN SHALL BE OF SUFFICIENT STRENGTH AND LENGTH AS TO PREVENT ACCIDENTAL LOSS OF CAP AND TO PERMIT EASY INSTALLATION AND REMOVAL OF CAP.
ATTACHMENT POINT AND METHOD OF ATTACHING CHAIN TO CAP OPTIONAL WITH MANUFACTURER.

(B) STANDARD REDRAWN.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Review and User activities: USAF - 11 Navy - WP

APPROVED 17 Jun 57 REVISED (A) 4 Jun 59 (B) 18 Dec 64

This standard has been approved by the Bu&Ep (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF— 11 Other Cust Navy - MP	TITLE: CAP - LUBRICATION FITTING, PROTECTIVE, PRESSURE SERVICING ADAPTER	MILITARY STANDARD MS24480(ASG)
PROCUREMENT SPECIFICATION MIL-A-25676	SUPERSEDES:	SHEET 1 OF 1

DD FORM SEP 67 672-1 (Limited Coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:55Z
Check the source to verify that this is the current version before use.