FED. SUP CLASS
5935

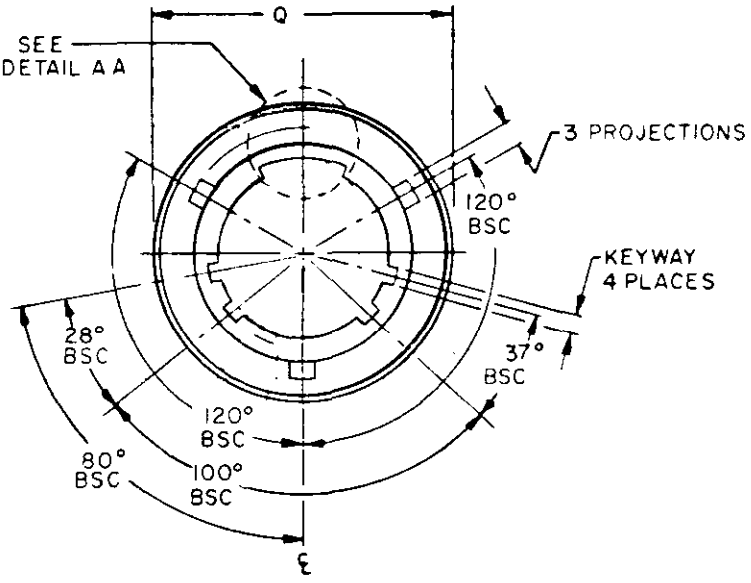


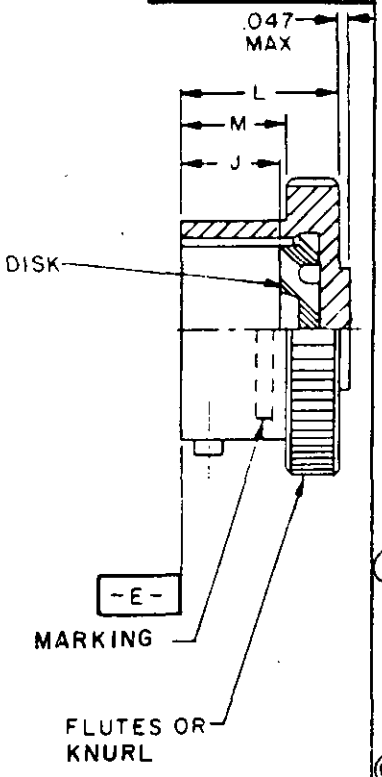


FOR DETAILS OF CAP FRONT END CONFIGURATION SEE PROCUREMENT SPECIFICATION

| SHELL SIZE | J +.015 −.010 | L MAX | M MIN | Q MAX DIA | T +.006 −.002 DIA | X BSC DEG | Y BSC DEG | CC |
|---|---|---|---|---|---|---|---|---|
| 8 | .222 | .562 | .312 | .719 | .078 | 82° | 118° | .004 |
| 10 | | | | .844 | | 72° | 128° | |
| 12 | | | | 1.000 | | 68° | 132° | |
| 14 | | | | 1.125 | | 66° | 134° | |
| 16 | | | | 1.250 | | 70° | 130° | .010 |
| 18 | | | | 1.375 | | | | |
| 20 | | | | 1.500 | .125 | 74° | 126° | |
| 22 | | | | 1.625 | | | | |
| 24 | | | | 1.750 | | | | |

EXAMPLE OF PART NUMBER

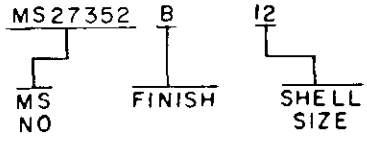


INACTIVE FOR DESIGN AFTER 13 SEPTEMBER 1977

INTERCHANGEABILITY RELATIONSHIP: Items identified by the ... style are universally, functionally, ... interchangeable.

(F) CANCELED - FOR PROCUREMENT USE MS27510 STYLE A

(F) DENOTES CHANGES

APPROVED 28 JAN 66 REVISED (C) 13 AUG 74 (D) (E) 13 SEP 1977 (F) 13 FEB 81

| | | | |
|---|---|---|---|
| P.A. AF-85<br>Other Cust<br>ARMY- CR<br>NAVY- AS | International interest | TITLE<br>CAP, PROTECTIVE, ELECTRICAL CONNECTOR PLUG, BAYONET COUPLING, SERIES II | MILITARY STANDARD<br>MS27352 |
| Procurement Specification<br>MIL-C-38999 | | SUPERSEDES:<br>MS27352 (USAF) | PAGE 1 OF 1 |

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-3174-1

Source: https://assist.dla.mil -- Downloaded: 20260-23T15:22Z
Check the source to verify that this is the current version before use.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981 — 703-023/1337

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army - Navy - Air Force -

Reviewer activities: Army - MI, AR Navy - EC, MC, OS Air Force - 11, 15, 17, 99

DLA-ES