FED. SUP CLASS
5310

MS9767

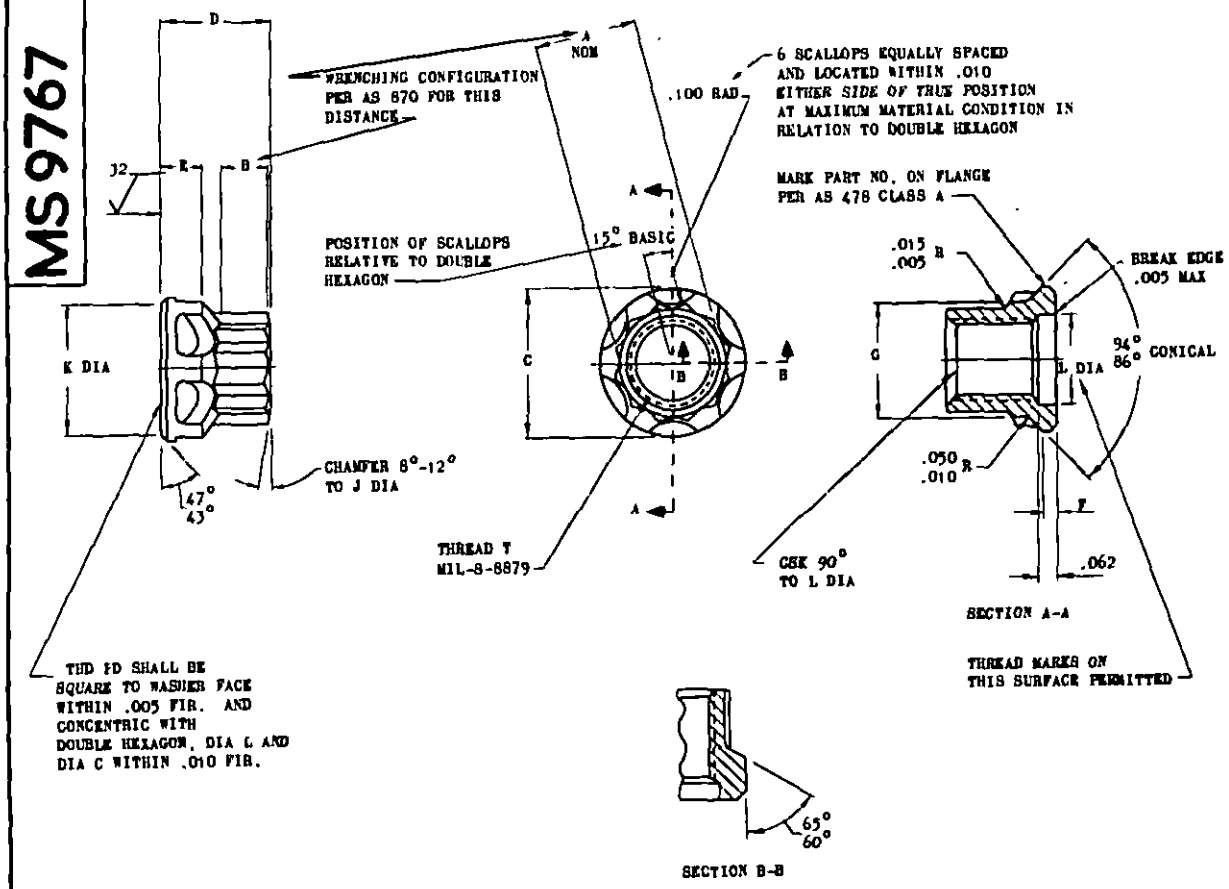

PART NUMBER	THREAD T	A NOM	B MIN	C +.000 -.005	D	E	F MIN	F MAX	G +.000 -.015	J	K +.000 -.010	L	APPROX WEIGHT LB/100
MS9767-09	.190-32 UNJF-3B	.2500	.122	.375	.277	.095	.030	.045	.285	.250	.345	.205	.492
MS9767-10	.250-28 UNJF-3B	.3125	.144	.438	.329	.125	.035	.055	.350	.312	.408	.265	.566
MS9767-11	.3125-24 UNJF-3B	.3750	.166	.500	.352	.125	.035	.055	.415	.375	.470	.327	.750
MS9767-12	.375-24 UNJF-3B	.4375	.168	.562	.384	.125	.035	.055	.480	.438	.532	.390	.919

1. MATERIAL: STEEL AMS 6322.
2. HARDNESS: ROCKWELL C26-32. PARTS MUST BE HARDENED (OIL QUENCHED) AND TEMPERED BEFORE THREADING.
3. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
4. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
5. SURFACE TEXTURE: USAS B46. 1-1962. UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 MICROINCHES.
6. BREAK SHARP EDGES .003 TO .015 UNLESS OTHERWISE SPECIFIED.
7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
8. DO NOT USE UNASSIGNED PART NUMBERS.

(B) REINSTATE. INACTIVE FOR NEW DESIGN, NO SUPERSEDING STANDARD.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION

APPROVED 16 Mar 70 REVISED (A) 25 Sep 81 (B) 5 Jan 83 -

REVIEW ACTIVITIES: USAF - 82

This standard has been approved by the Department of the Air Force (AFSC) and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF-11 Other Cust NAVY-AS	TITLE: NUT, DOUBLE HEXAGON - CUPWASHER LOCKED, AMS 6322, CADMIUM PLATED MIL-S-8879	MILITARY STANDARD MS9767
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Formerly MIL-STD-100A)

Source: https://assist.dla.mil - Downloaded: 2026-10-23T13:25Z
Check the source to verify that this is the current version before use.