MIL-M-28519A(YD)
11 June 1984
SUPERSEDING
MIL-M-28519(YD)
8 March 1969

MILITARY SPECIFICATION

METER, VOLUMETRIC, POSITIVE DISPLACEMENT, LIQUID, AIRCRAFT FUEL, 600 GPM

This specification is approved for use by the Naval Facilities Engineering Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a 600 gallons per minute (gpm) aircraft fuel volumetric, positive displacement meter.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

* 2.1.1 Specifications, standards, and handbooks. Unless otherwise specified (see 6.2), the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-636 - Boxes, Shipping, Fiberboard.

MILITARY

MIL-W-80 - Window, Observation, Acrylic Base, Antielectrostatic, Transparent (For Indicating-Instrument).
MIL-P-116 - Preservation, Methods of.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6680

Source: https://assist.dla.mil -- Downloaded: 202610-20T13:07Z
Check the source to verify that this is the current version before use.

MIL-T-5624 - Turbine Fuel, Aviation, Grades JP-4 and JP-5.
MIL-M-82002 - Manifold and Accessory Assemblies, Portable Fuel Distribution Systems, Quick-Disconnect Hose Coupling Type.

STANDARDS

FEDERAL

FED-STD-H28 - Screw-Thread Standards for Federal Services.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.
MIL-STD-794 - Parts and Equipment, Procedures for Packaging of.
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

B16.24 - Class 150 and 300 Bronze Pipe Flanges and Flanged Fittings.

(Application for copies should be addressed to the American National Standards Institute, Inc. 1430 Broadway, New York, NY 10018.)

AMERICAN PETROLEUM INSTITUTE (API)

API-STD-1101 - Manual of Petroleum Measurement Standards.

(Application for copies should be addressed to the American Petroleum Institute, 2101 "L" Street, NW, Washington, DC 20037.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D3951 Commercial Packaging, Standard Practice for.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

* 3.1 Description. The meter shall be a positive displacement meter with 6-inch flanged connections, with grooved ends, capable of handling diesel fuel, automotive gasoline, and also aviation gasoline and aviation jet fuels at a flow rate of 600 gpm. Meter shall have a digital readout register that indicates the gallonage throughput. This register shall be an appurtenant part of the meter, and be mounted on the meter.

3.2 Standard commercial product. The meter shall, as a minimum, be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the meter being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

* 3.3 First article. When specified (see 6.2), the contractor shall furnish a meter for first article inspection and approval (see 4.2.1 and 6.4).

* 3.4 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification unless otherwise specified.

3.5 Design and construction. The meter shall be so designed and constructed as to prevent parts from working loose in service and permit easy accessibility for maintenance and service in the field. The design shall be such as to prevent conditions hazardous to personnel or deleterious to equipment. The meter shall be reversible and shall meet the flow, accuracy, and pressure requirements specified herein. The meter shall be constructed of aluminum, maganese bronze, stainless steel, or nylon, as specified (see 6.2). The meter, including the register, and the 45 degree (°) ells, when required, shall not exceed the following overall dimensions:

Length - 21 inches
Width - 22 inches
Height - 23 3/8 inches

Tolerances shall be ± 0.031 inch. Screw threads shall conform to FED-STD-H28.

Source: https://assist.dla.mil -- Downloaded: 202610-20T13:07Z
Check the source to verify that this is the current version before use.

* 3.6 Interchangeability. All units of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to insure interchangeability of component parts, assemblies, accessories, and spare parts.

* 3.7 Treatment and painting. Unless otherwise specified (see 6.2), the meter shall be treated and painted in accordance with the manufacturer's standard practice. All surfaces of the meter other than corrosion-resisting steel shall be protected against corrosion and present a neat appearance.

3.8 Dissimilar metals. Metals dissimilar with respect to the galvanic scale shall not be used unless separated by a protective material that prevents electrolytic corrosion. Table 1, group metals that are compatible.

TABLE I. Compatible metals.

Group 1	Group 2	Group 3	Group 4
Magnesium Alloys Most anodic metals	Aluminum Aluminum alloys Cadmium Tin Stainless-Steels	Zinc Cadmium Steel Lead Tin Stainless-steels	Copper and its alloys Nickel and its alloys Chromium Stainless-steel Gold Silver Most cathodic metals

3.9 Details of components. The meter shall consist of accessory equipment specified (see 6.2), any additional apparatus normally furnished with this type of meter, and the components specified below.

3.9.1 Housing. The meter shall be of 2-case construction so that the measuring element is not exposed to a differential pressure exceeding the maximum pressure loss.

3.9.2 Drain. A drain shall be provided at the lowest point of the meter housing. When closed the drain shall be leakproof.

3.9.3 Adjustment mechanism. The meter shall be equipped with an accuracy adjustment mechanism that will operate without change during the life of the meter, except by manual adjustment. The mechanism shall be calibrated in equally spaced graduations in increments of 1/2 gallon or less, per 1,000 gallons. The accuracy adjustment mechanism shall be so designed as to be direct-reading and permit ready adjustment without disassembly of the mechanism, except for removal of the access cover plate. Provisions shall be made for sealing the adjustment mechanism or cover plate with a lead seal. The accuracy adjustment shall have a minimum range of 5 percent. If lubrication is required, the unit shall be lubricated for the life of the meter.

3.9.4 Inlet and outlet. The meter shall be designed for straight-through flow and shall be fitted with 45° ells having a common longitudinal axis. The

Source: https://assist.dla.mil -- Downloaded: 20260-20T13:07Z
Check the source to verify that this is the current version before use.

meter and ells shall be provided with flanges having a nominal size of 6 inches. The flanges shall be in accordance with ANSI B16.24, and as specified herein. The minimum flange thickness shall be 1 inch. The flange shall be provided with eight boltholes equally spaced having a diameter of .875 inch. The bolthole circle diameter shall be 10.62 inches ± 0.018 inch. The outside flange diameter shall be 12.50 inches ± 0.031 inch (see figure 1).

3.9.5 Meter register. The meter register provided may be mounted on the meter housing in a manner convenient to the manufacturer, but shall not extend beyond the overall envelope dimensions of the meter. The register shall contain a set of five direct-reading digits coated with fluorescent paint. Each digit shall have a minimum height of 3/4 inch and shall be capable of recording a flow of 99,999 gallons of fuel, and shall be equipped with a 7-digit totalizer unit.

3.9.6 Drive. The meter register shall either have a positive counter drive with no friction devices or a finely adjustable driving mechanism capable of transmitting without slippage, a torque of not less than 40 ounce-inches.

* 3.9.7 Meter flange connection with grooved ends. Unless otherwise specified, each meter shall include two flange connections mounted on the meter body. Flanges shall be 6 inch inside diameter, 300 pound (lb) class flanges, and in accordance with ANSI B.16.24. In addition, each meter shall have two rubber gaskets with companion flanges which are an integral part of the units. These flanges must be compatible with the meter body flanges in shape, size, and bolt hole pattern.

* 3.9.8 Strainer. When specified each meter shall be protected from pipe scale or foreign objects by a strainer placed in the piping, near the inlet side of the meter. The strainer shall be constructed of steel, and have an inlet and outlet flange compatible to the 6-inch meter. Each meter will be provided complete with a strainer basket manufactured of cadmium plated steel with Monel metal screen inserts, or of all stainless steel.

3.9.9 Face. The register shall have a transparent, colorless, plastic face of material conforming to MIL-W-80. The face shall be of sufficient size to provide a full view of all digits.

3.9.10 Indexing. The register shall be of a type that can be indexed throughout a full revolution in increments of 30° or less, to permit positioning of the register in any direction with relation to the meter housing.

* 3.9.11 Torque limitation. The breakaway torque required to rotate the input shaft of the register shall not exceed 40 ounce-inches at -65° Fahrenheit (F).

3.9.12 Lost motion. When the meter is reversed, the accumulative lost motion through the adjustment mechanism and register shall not exceed 2 recorded gallons.

* 3.9.13 Thermal protection. When specified, a heating device shall be furnished to protect the meter from low or freezing temperatures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

3.10 Performance.

3.10.1 Static pressure. The meter shall be capable of operating at a working pressure of 150 pounds force per square inch (psi).

* 3.10.2 Flow pressure drop. The maximum pressure drop between inlet and outlet shall not exceed 3 psi when operating at rated capacity at 138°F.

3.10.3 Meter life. The meter shall be capable of a life expectancy that will permit metering of 60 million gallons of fuel at rated capacity and in accordance with the requirements specified herein.

3.10.4 Meter error. The meter error shall not exceed 0.1 percent for any one predetermined flow rate and accuracy setting. The maximum error shall not exceed 0.3 percent for any one given accuracy adjustment at any flow rate ranging from 30 to 600 gpm.

3.10.5 Overload operation. The meter shall be capable of overload operation at 115 percent of maximum rated capacity in either direction without damage to the mechanism.

3.10.6 Environmental conditions.

* 3.10.7 Temperatures. The meter shall be capable of meeting all performance requirements specified herein at ambient temperatures ranging from -71°F to +126°F. The maximum pressure drop at -65°F shall not exceed 4 psi. The meter shall not be damaged by storage at ambient temperatures ranging from -80°F to +160°F.

3.10.8 Humidity. The meter shall perform satisfactorily after being subjected to humidity conditions specified in 4.5.9.

3.10.9 Salt fog. The meter shall perform satisfactorily after being subjected to salt fog test specified in 4.5.10.

3.10.10 Sand and dust. The meter shall be completely sealed against the deleterious effects of sand and dust, for the test specified in 4.5.11.

3.11 Weight. The net weight of the meter including the register and ells shall not exceed 250 lb.

3.12 Identification marking. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130. The nomenclature of the item shall be "Meter, Volumetric, Positive Displacement, Liquid".

3.13 Identification plate. The contracting officer will furnish to the Government inspector the required identification plates. The contractor will be required to stamp the necessary data in the blank spaces thereon and securely affix said plates in a conspicuous place on each unit, assembly or subassembly, and parts as directed by the Government inspector. Nonferrous screws, rivets, or bolts of not less than 1/8 inch in diameter shall be used to affix the plates. Nomenclature shall be "Meter, Positive Displacement Type, 600 GPM".

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

* 3.14 Workmanship.

* 3.14.1 Bolted connections. Boltholes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

* 3.14.2 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the castings ability to perform its intended function.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in applicable referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

* 4.2.1 First article inspection. The first article inspection shall be performed on one meter when a first article is required (see 3.3 and 6.2). This inspection shall include the examination of 4.4 and the tests of 4.5. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.4, the tests of 4.5.1 and 4.5.2, and the packaging inspection of 4.6. This inspection shall be performed on the samples selected in accordance with 4.3.

* 4.3 Sampling. Sampling and inspection procedures shall be in accordance with MIL-STD-105. All meters offered for delivery at one time shall be considered a lot for the purpose of inspection. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units, and resubmit for a complete reinspection. Resubmitted lots shall be reinspected using tightened inspection. If the rejected lot was screened, reinspection shall be limited to the defect causing rejection. If

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

the lot was reprocessed, reinspection shall be performed for all defects. Rejected lots shall be separate from new lots, and shall be clearly identified as reinspected lots.

* 4.3.1 Sampling for examination. Examination shall be based on inspection level II and an Acceptable Quality Level (AQL) of 4.0 percent defective.

* 4.3.2 Sampling for tests. Tests shall be based on inspection level S-2 and an AQL of 4.0 percent defective.

4.4 Examination. Each meter shall be examined for compliance with the requirements specified in section 3 of this specification. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.5 Tests.

4.5.1 Hydrostatic pressure test. The meter shall be subjected to a hydrostatic pressure of 225 psi for 30 minutes. The meter shall show no leakage, rupture, or evidence of failure as a result of this test.

* 4.5.2 Calibration test. The meter manufacturer shall maintain on file certification of proof that the meter(s) furnished have been calibrated with fuels conforming to MIL-T-5624 and in accordance with API-STD-1101.

4.5.3 Overload operation test. The meter shall be operated at 115 percent of maximum rated capacity first in one direction for 30 minutes and then for 30 minutes in the opposite direction. There shall be no failure or evidence of strain or wear.

* 4.5.4 High temperature test. The meter shall be subjected to high temperature in accordance with MIL-STD-810, method 501.1, procedure I, steps 1 through 4. Following the 48-hour exposure at 160°F, the meter shall be removed from the chamber and visually examined for deterioration. The meter shall show no deleterious effects from the exposure and shall complete the remainder of the tests in a satisfactory manner.

* 4.5.5 Low temperature test. The meter shall be subjected to low temperature in accordance with MIL-STD-810, method 502.1, procedure I, steps 1 through 6. Following the period of 24 hours after stabilization, at -71°F, the meter shall show no evidence of failure and shall complete the remaining tests in a satisfactory manner.

4.5.6 Low temperature calibration test. The meter, in an ambient temperature of -65°F, shall be calibrated with fuel conforming to MIL-T-5624 and in accordance with API-STD-1101.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

4.5.7 Low temperature pressure drop test. The maximum pressure drop recorded through the low temperature calibration in 4.4.3.1 shall not exceed 4 psi.

* 4.5.8 Low temperature test of register torque. With the temperature of the meter register maintained at -65°F, the maximum breakaway torque required to rotate the input shaft of the register for 1- and 5-digit movement shall be determined. This torque shall not exceed 40 ounce-inches.

* 4.5.9 Humidity test. The meter shall be subjected to humidity in accordance with MIL-STD-810, method 507.1, procedure I, steps 1 through 7. Following this test, the meter shall be visually examined for deterioration, evidence of swelling, separation of components, and related types of failure (see 3.10.8).

* 4.5.10 Salt fog test. The meter shall be exposed to salt fog in accordance with MIL-STD-810, method 509.1, procedure I. During this test, the inlet and outlet of the meter shall be plugged to prevent internal contamination. The meter shall resist the effects of the test and shall show no evidence of failure or malfunction (see 3.10.9).

* 4.5.11 Sand and dust test. The meter shall be exposed to sand and dust in accordance with MIL-STD-810, method 510.1, procedure I, steps 1 through 4. During this test, the inlet and outlet of the meter shall be plugged to prevent internal contamination. Upon completion of the test, it shall be demonstrated that the meter is completely operable (see 3.10.10).

* 4.5.12 Life test. Fuel shall be pumped through the meter at a flow rate of 600 gpm for a total of 500 hours. There shall be no sign of wear, failure, or other defects as a result of this test. Upon completion of the life test and without intervening disassembly, the meter shall satisfactorily complete the tests specified in 4.5.1 through 4.5.13.

4.5.13 Efficiency test of accuracy adjusting mechanism. The accuracy adjusting mechanism shall be installed. The prony brake shall be regulated to produce a frictional resistance of 40 ounce-inches. The adjusting mechanism shall be operated for a minimum of 500 revolutions of the output shaft. Revolutions of both input and output shafts shall be recorded. The frictional resistance of the prony brake shall then be reduced to 0 ounce-inches and the mechanism operated for another 500 revolutions of the output shaft. This procedure shall be followed for three different settings, +2 1/2, 0, and -2-1/2 percent, through the range of the accuracy adjusting mechanism. For each setting, the following ratios shall be determined.

It shall be demonstrated that for each setting $R_{40} = R_0$.

$$R_{40} = \frac{\text{Revolutions of input shaft at 40 ounce-inches load}}{\text{Revolutions of output shaft at 40 ounce-inches load}}$$

$$R_0 = \frac{\text{Revolutions of input shaft at 0 ounce-inches load}}{\text{Revolutions of output shaft at 0 ounce-inches load}}$$

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

4.5.14 Disassembly inspection. Upon completion of the testing specified in 4.5.1 through 4.5.13, the meter shall be disassembled and its components shall be examined. The meter shall show no abnormal wear.

* 4.6 Packaging inspection. The preservation, packing, and marking of the item shall be inspected to verify conformance to the requirements of section 5.

5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or C as specified (see 6.2).

* 5.1.1 Level A. Each meter shall be preserved method III in accordance with MIL-P-116 and packaged in a box conforming to PPP-B-636, class weather resistant.

* 5.1.2 Level C. Material shall be preserved in accordance with ASTM D3951.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Levels A and B. Packing shall be in accordance with MIL-STD-794. Containers shall be selected from table I for the appropriate level. Only closed containers shall be used.

5.2.2 Level C. Material shall be packed in accordance with ASTM D3951.

5.3 Marking. Marking shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The meter specified herein is part of the Advanced Base Functional Component Petroleum Oil Lube (ABFC POL) system and is intended for metering of fuel pumped into fuel tanker trucks for hauling to various Naval Construction Force (NCF) camp and construction sites. The fuels most generally metered will be diesel fuel and automotive gasoline, however, under some circumstances it will be used for the metering of jet fuel and aviation gasoline. All type fuels used in conjunction with the meter specified herein must pass through a strainer in the piping system, prior to reaching the meter. The meter is also used in conjunction with type VI meter and strainer assembly of MIL-M-82002.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Specifications and standards (see 2.1.1).
c. When first article is required for inspection and approval (see 3.3, 4.2.1, and 6.4).
d. Type of material required to construct meter (see 3.5).
e. When treatment and painting are required (see 3.7).
f. When details of components are required (see 3.9).
g. Level of preservation and level of packing required (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

* 6.3 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423 Contract Data Requirements List (CDRL) and invokes the provisions of paragraph 7-104.9(n) of the Defense Acquisition Regulations (DAR), the data requirements will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL (DD Form 1423) incorporated into the contract. When the provisions of DAR 7-104.9(n) are not invoked, the data shall be delivered in accordance with the contract requirements.

* 6.4 First article. When a first article inspection is required (see 3.3 and 6.2), the item will be tested and should be a first production item or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one 600 gpm meter. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

* 6.5 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Navy - YD

Preparing activity:

Navy - YD

(Project 6680-N201)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

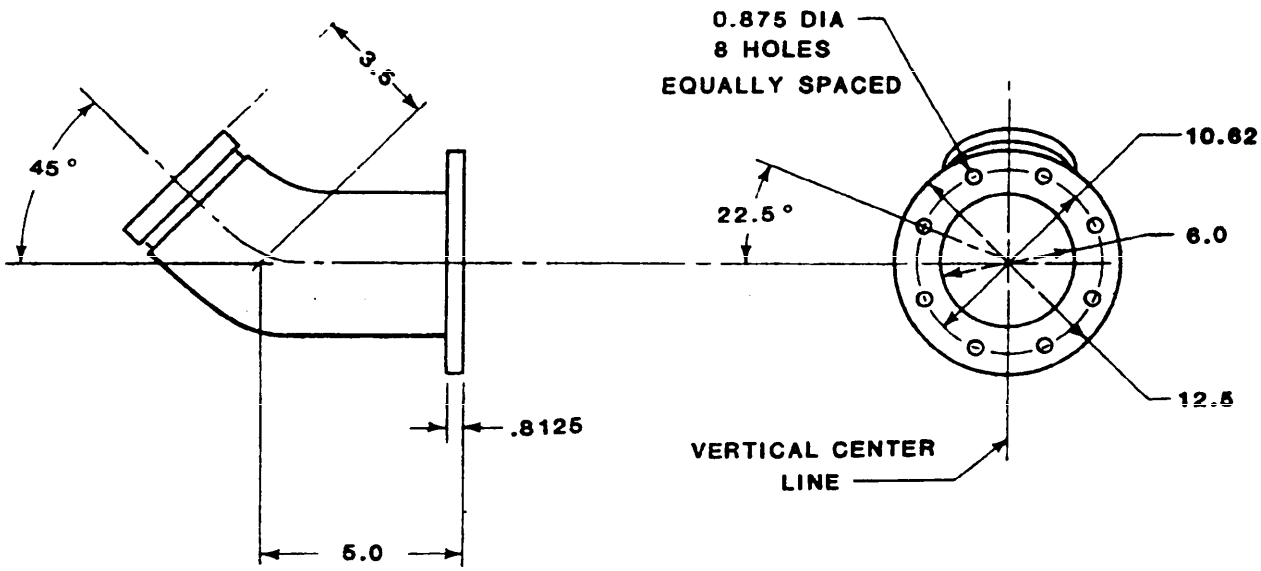


FIGURE 1. 45°, 6 inch connector with flange and grooved end

Source: https://assist.dla.mil - Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

6680-N201

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-28519A(YD)	METER, VOLUMETRIC, POSITIVE DISPLACEMENT, LIQUID, AIRCRAFT FUEL, 600 GPM

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Commander
Naval Facilities Engineering Command
200 Stovall Street
Alexandria, VA 22332

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer (156)
Naval Construction Battalion Center
Port Hueneme, CA 93043

Source: https://assist.dla.mil -- Downloaded: 202610-20T13:07Z
Check the source to verify that this is the current version before use.