INCH-POUND

MIL-PRF-28520D(YD1)
3 March 1998
SUPERSEDING
MIL-P-28520C(YD)
15 January 1992

PERFORMANCE SPECIFICATION

PUMPING ASSEMBLY, FLAMMABLE LIQUID, BULK TRANSFER, 600 GALLONS PER MINUTE, DIESEL-ENGINE-DRIVEN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a portable, skid-mounted, diesel-engine-driven, pumping assembly for use in flammable liquid bulk transfer.

1.2 Classification. Pumping assemblies covered by this specification are of the following classes, as specified (see 6.2):

Class I - 600 gallons per minute (gpm) (38 litre per second (L/s)) - JP-5 fuel at 350 feet (1 046 kilopascal (kPa)) total dynamic head (TDH).

Class II - 600 gpm (38 L/s) - JP-5 fuel at 350 feet (1 046 kPa) TDH.
800 gpm (50 L/s) - Nonpotable water at 330 feet (986 kPa) TDH.

Class III - 600 gpm (38 L/s) - Navy special fuel at 330 feet (986 kPa) TDH.
900 gpm (57 L/s) - Navy special fuel at 300 feet (897 kPa) TDH.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: Commanding Officer (Code 15E2), Naval Construction Battalion Center, 1000 23rd Avenue, Port Hueneme, CA 93043-4301, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4320

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specification and standard. The following specifications and standard form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-50431 - Couplings - Quick Disconnect, Bowes Type (Air Hoses and Piping).

MILITARY

MIL-T-5624 - Turbine Fuel, Aviation, Grades JP-4 and JP-5/JP-8 ST.

STANDARD

FEDERAL

FED-STD-595 - Colors Used in Government Procurement.

(Unless otherwise indicated, copies of the above specifications and standard are available from the Defense Automated Printing Services, Attn: DoDSSP, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2.2 Other Government publications. The following other Government publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DEPARTMENT OF LABOR
OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

Title 29, CFR, Part 1910.219 - Mechanical Power-Transmission Apparatus.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

ANSI S1.13 Measurement of Sound Pressure Levels in Air.

(Application for copies should be addressed to the American National Standards Institute, Inc., 11 West 42nd Street, New York, NY 10036.)

ASTM

ASTM D 396 - Fuel Oils.

(Application for copies should be addressed to the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

HYDRAULIC INSTITUTE

Hydraulic Institute Standards.

(Application for copies should be addressed to the Hydraulic Institute, 9 Sylvan Way, Parsippany, NJ 07054-3802.)

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)

SAE J534 - Lubrication Fittings, Standard.

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the reference cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The pumping assembly shall consist of a pump and a diesel engine complete with all necessary accessories for use in flammable liquid bulk transfer.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.2 and 6.3.

3.3 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification.

3.3.1 Selection of material for pump parts. Unless otherwise specified herein, the selection of materials used in the manufacture of the pump shall be in accordance with the Hydraulic Institute Standards. The manufacturer shall select the materials which shall minimize galvanic corrosion to the greatest extent possible.

3.4 Design. The complete pumping assembly shall be designed to withstand the strains, jars, vibrations, and other conditions incidental to shipping, storage, installation, and operation. The pumping assembly shall be complete so that, when installed, it can be used for the operation for which it was designed.

3.4.1 System of measurement. The dimensions used in this specification are not intended to preclude the use of the metric system of measurement in the fabrication and production of the material, individual parts, and finished product, provided form, fit, and function requirements are satisfied.

3.5 Performance. The class I pumping assembly shall deliver not less than 600 gpm (38 L/s) of JP-5 fuel, MIL-T-5624, against a TDH of 350 feet (1 046 kPa). The class II pumping assembly, in addition to fulfilling the requirements of class I, shall deliver not less than 800 gpm (50 L/s) of nonpotable water, against a TDH of 330 feet (986 kPa). The class III pumping assembly shall deliver not less than 600 gpm (38 L/s) of Navy special fuel oil, ASTM D 396, against a TDH of 330 feet (986 kPa). The class III pumping assembly in addition shall deliver 900 gpm (57 L/s) of Navy special fuel at 300 feet (897 kPa) TDH. For all classes of pumping assemblies, the maximum net positive suction head requirements shall be not greater than 13 feet (39 kPa) at the operating speed of the pumping assembly. When tested in accordance with 4.5.2.1, the pumping assembly shall develop a peak efficiency of not less than 60 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

3.6 Pump design. The pump shall be self-priming. The pump shall have a mounting arrangement capable of accepting a 6-inch (152 millimetre (mm)) flanged suction and discharge port. Flanges shall have an equidistant bolt pattern of eight holes, 0.8125-inch (21 mm) diameter, on a 9.5-inch (241 mm) diameter bolt circle. Casing shall be uniform in quality and condition, free from cracks, hard spots, porosity, shrinkage defects, misplaced coring, and other defects which may affect the intended use.

3.6.1 Hydrostatic pressure. The pump shall withstand an internal hydrostatic pressure of 1.5 times the maximum allowable working pressure for not less than 30 minutes on the first article unit and 5 minutes on the production units without rupture or distortion to any component. When pressure is applied, there shall be no leakage through the pump, fittings, piping, or joints.

3.6.2 Special accessories. Class I pumping assembly shall be equipped with the following accessories for use with lightweight hose:

a. Two each, flange to quick-disconnect hose coupling halves conforming to A-A-50431, one male and one female; circular flange, size 6-inch (152 mm).
b. Suction line strainer.
c. Suction gate valve.
d. Air eliminator.

3.7 Diesel engine. The diesel engine shall be an industrial, liquid- or air-cooled, two-stroke-cycle or four-stroke-cycle engine. The continuous horsepower output-shaft rating shall be sufficient to meet the input requirements of the pumping assembly without exceeding the manufacturer's published continuous horsepower. The engine shall be furnished with the following:

a. 12-volt electric cranking system with a charging system and battery(s) suitable for 20 degrees Fahrenheit (°F) (- 6 degrees Celsius (°C)) starting.
b. Air cleaner, dry type with replaceable element.
c. Overspeed shutdown control.
d. High temperature shutdown control.
e. High temperature product shutdown control.
f. Engine oil low pressure shutdown control.
g. Spark-arresting muffler.

3.7.1 Class I engine. The class I pump engine shall be equipped with the following special governor control for use with light-weight hose:

a. Speed reducer to no-flow at 120 pounds force per square inch, gage (psig) (827 kilopascal (kPa (gage)) discharge pressure.
b. Automatic control to allow not more than 20 inches of mercury (68 kPa) vacuum on the suction line.
c. Automatic low discharge pressure shutdown at 80 psig (552 (kPa (gage)).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

When specified (see 6.2), the class I pump engine shall also be equipped with a hydraulic starting system, in lieu of an electrical system, capable of operation in an environment of 20 °F (- 6 °C).

3.7.2 Manual engine control. The manual engine-speed control shall operate the engine at any selected speed from idling to maximum governed speed.

3.8 Engine housing. The engine housing and radiator, if applicable, shall be provided with a sheet metal fabricated housing, without side panels.

3.8.1 Instrument panel. The instrument panel shall be mounted on the engine housing. The location shall be such as to permit simultaneous use of instruments, engine controls, and pump discharge controls.

3.9 Fuel system. The fuel system shall have sufficient capacity to provide a minimum four-hour operation without refueling. A lever-operated changeover valve having external threads for attachment of a 0.25-inch (6 mm) hose shall provide an outlet connection for an auxiliary fuel system. A 2.5 ounce (74 millilitre) sight-feed oil cup, with a regulating device for adding lube oil when JP-5 is used, shall be mounted within the engine enclosure.

3.10 Grounding assembly. The pump assembly shall be equipped with a grounding assembly consisting of not less than the following:

3.10.1 Ground wire. One uninsulated braided ground wire, 10 American Wire Gage (AWG), 6 feet (1.8 metre (m)) long shall be provided. A 50-ampere electrical bronze clamp shall be soldered to each end of the wire.

3.10.2 Ground rod. One copper clad ground rod 6 feet (1.8 m) long, shall be provided. The rod shall be 0.5-inch (13 mm) diameter, of copper-clad, cold-rolled steel. Suitable clip(s) shall be attached to the skid mount for securing the ground rod to the pumping assembly when the rod is not in use.

3.10.3 Ground terminal. A ground terminal shall be provided on the skid mount. The terminal shall be bonded to the skid mount and shall be located near the engine.

3.11 Lubrication. Unless otherwise specified (see 6.2), means for lubrication shall be in accordance with the manufacturer's standard practice. The lubricating points shall be easily visible and accessible. Hydraulic lubrication fittings shall be in accordance with SAE J534. Where use of high-pressure lubricating equipment, 1,000 psi (6 895 kPa) or higher, will damage grease seals or other parts, a suitable warning shall be affixed to the equipment in a conspicuous location.

3.12 Safety. All mechanical and electrical parts that are of such nature or so located as to become a hazard to operating or maintenance personnel shall be enclosed or properly guarded in accordance with Title 29, CFR, Part 1910.219.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

3.12.1 Noise. Sound levels from the pump shall be determined in accordance with ANSI S1.13. Measurements of the sound levels shall be made at 4.5 feet (1.4 metre) from the pump. When the sound level is greater than 85 decibels on the "A" scale, slow response, a noise warning plate shall be provided. The warning plate shall be of corrosion-resistance material, which will last and remain legible for the life of the pump. The plate shall be securely affixed with screws or bolts to a location conspicuous to the pump operator. The plate shall have a yellow background with black lettering inscribed as follows:

CAUTION
EAR PROTECTION REQUIRED
WHEN EQUPMENT IS OPERATING

3.13 Skid mount. The components shall be mounted on a common skid. The skid shall consist of two steel skid runners with integrally formed, welded, or bolted base plate for mounting components of the pumping assembly. The skid runners shall be upturned or beveled at each end to permit skidding the pump assembly into place. The skid runners shall be furnished with mounting holes for anchoring the pumping assemblies to concrete foundation or wooden deck. The number and size of holes shall be determined by the manufacturer to be required for anchorage of the pumping assembly under the most severe condition of vibration or thrust to develop during operation. The skid runners shall be of sufficient height to provide ready access to any connections located under the pumping assemblies and shall be of sufficient width to provide adequate bearing surface on a smooth gravel base. Individual mountings shall be furnished as required, on the base plate for supporting motors, pumps, and other components in vertical alignment. Other components requiring removal for service, adjustment, or horizontal alignment shall be mounted in such a manner to permit removal or alignment. The skid mount shall be provided with fork truck pockets to permit forklift handling. The pockets shall be not less than 24 inches (610 mm) on centers and shall be shaped to accommodate a forklift fork of sizes up to 3 inches (76 mm) in thickness and 8 inches (203 mm) in width.

3.14 Lifting attachments. Permanently affixed attachments shall be provided to permit the pumping assembly to be lifted in its normal operating position. The class I pumping assembly shall utilize a single point lifting device; classes II and III may use a single point lifting device. Each attachment shall withstand, without damage to any part of the assembly, 2.5 times the resultant vectorial force imposed when the individual pumping assembly is suspended by the lifting attachments. Attachments for multiple slings shall be so located that slings will not converge at a point not more than 19 feet (5.8 m) above the lowest extremity of the pumping assembly. Not less than 1-inch (25 mm) clearance will be maintained between the slings and the pumping assembly. The inside diameter of the attachment eye shall be not less than 3 inches (76 mm). Lifting attachments may be used for tiedowns, provided they meet the requirements of 3.15.

3.15 Tiedown attachments. Permanently affixed attachments shall be provided that permit fastening the pumping assembly to the floor or deck of a transportation medium. Each attachment shall withstand, without damage to the pumping assembly, its proportion of the following static loads where G equals the assembly weight:

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

8.0 G forward or rearward.
2.5 G upward.
1.5 G sideward.

All edges of the attachments shall be rounded or beveled. Tiedowns may be used for lifting provided they meet the requirements of 3.14.

3.16 Interchangeability. All pumping assemblies of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to ensure interchangeability of component parts, assemblies, accessories, and spare parts.

3.17 Instruction plates. The pumping assembly shall be equipped with instruction plates suitably located, describing any special or important procedures to be followed in operating and servicing the equipment. Plates shall be of a material which will last and remain legible for the life of the equipment. Plates shall be securely affixed to the equipment.

3.18 Identification marking. Identification shall be permanently and legibly marked directly on the pumping assembly or on a corrosion-resisting metal plate securely attached to the pumping assembly at the source of manufacture. Identification shall include the manufacturer's model and serial number, name, and trademark to be readily identifiable to the manufacturer.

3.19 Treatment and painting. Unless otherwise specified (see 6.2), the pumping assembly shall be treated and painted in accordance with the manufacturer's standard practice. All surfaces of the pumping assembly other than corrosion-resisting steel shall be protected against corrosion and present a neat appearance. Color of the finish coat shall be green, no. 14064, in accordance with FED-STD-595.

3.20 Workmanship.

3.20.1 Bolted connections. Bolt holes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.20.2 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to ensure uniformity of size and shape.

3.20.3 Riveted connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall be driven with pressure tools and shall completely fill the holes. Rivet heads, when not countersunk or flattened, shall be of an approved shape and uniform size for the same diameter of rivet. Rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

3.20.4 Castings. All castings shall be sound and free from patching, misplaced coring, warping, or any other defect which reduces the casting's ability to perform its intended function.

3.20.5 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Welds shall be of sufficient size and shape to develop the full strength of the parts connected by the welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the weld are subjected to proof and service loading.

4. VERIFICATION

4.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).
b. Conformance inspection (see 4.3).

4.2 First article inspection. The first article inspection shall be performed on one complete pumping assembly when a first article is required (see 3.2 and 6.2). This inspection shall include the examination of 4.4 and the tests of 4.5. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.3 Conformance inspection. The conformance inspection shall include the examination of 4.4 and the tests of 4.5.1 and 4.5.4.

4.4 Examination. Each pumping assembly shall be examined for compliance with the requirements specified in section 3 of this document. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual examinations and dimensional measurements. Noncompliance with any specified requirement or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.5 Tests.

4.5.1 Hydrostatic test. The pump and fitting shall be subjected to an internal hydrostatic test pressure of 1.5 times the maximum allowable working pressure, for a period of not less than 30 minutes on the first article unit and 5 minutes on the production units. Nonconformance to 3.6.1 shall constitute failure of the test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

4.5.2 Performance. All data shall be corrected to sea level conditions, barometric pressure 29.92 inches (101 kPa) of mercury, for JP-5 and Navy special fuels at 60 °F (16 °C). Water at a temperature of 60 °F (16 °C) to 80 °F (27 °C) shall be used as a test fluid.

4.5.2.1 Performance test. The pumping assembly shall be operated continuously using water for a period of not less than one hour. The test shall be conducted in accordance with pump requirements of the Hydraulic Institute Standards. During this run, a characteristic head-capacity curve shall be plotted over the complete operating range of the pump while the engine speed controls are set at an adjustment not greater than that producing the net continuous brake horsepower (watt) rating of the engine. Performance at rates less than those specified in 3.5 shall constitute failure of this test. After the 1-hour test, the pumping assembly shall be run continuously for not less than 30 minutes through a range obtained with minimum-to-maximum engine speed control settings. No critical speed shall be permitted at any point of the range. Each pumping assembly shall be tested for smoothness of operation and sealing effectiveness of mechanical seals. No leakage shall be evident in the casing or through the casing gasket. Minor leakage through the mechanical seals, not greater than one drop per minute, shall not be cause for rejection.

4.5.3 Operational test. The pumping assembly shall be operated for 24 hours for the first article unit and 30 minutes for production units at the rated conditions specified in 3.5. The pump shall be examined at the end of each 8-hour interval during the 24 hours. Maintenance and minor adjustments shall be permitted during the examination periods. The pump shall be examined during the operation for leakage through the pump casing or the shaft seals and for malfunction of any component. Any leakage attributable to defects in design, workmanship, materials, or to the malfunction of any component, or inability of the pump to deliver the minimum capacities specified herein shall constitute failure of this test.

4.5.4 Functional test. The pumping assembly shall be operated for a period of not less than one-hour to verify the functional operation of the controls. The control functions shall be in accordance with the applicable requirements of 3.7.

4.5.5 Tilted position. The pumping assembly shall be operated for not less than 30 minutes while it is positioned 15 degrees from level along the longitudinal centerline of the skid base. Evidence of malfunction or misalignment of components shall constitute failure of this test.

4.5.6 Cold starting. The pumping assembly shall be placed in a cold chamber at 20 °F (- 6 °C) for 48 hours or until stabilization temperature is reached. The system shall demonstrate three successive starting cycles without the use of external power. Sufficient time should be allowed so that components can return to 20 °F (- 6 °C) equilibrium.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The pumping assembly is used primarily to transfer flammable liquids from one storage tank to another. The class II pumping assembly can also be used to pump water for construction, irrigation, or discharge purposes.

6.1.1 Selection factors. Fungus resistant varnish conforming to MIL-V-173 should be used to coat electrical components and circuit elements, including terminal and circuit connections, when the pumping assembly is to be installed in humid conditions. Components and elements inherently inert to fungi or in hermetically sealed enclosures or current-carrying contact surfaces should not be coated.


6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Class of pumping assembly required (see 1.2).
c. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1 and 2.3).
d. When first article is required for inspection and approval (see 3.2 and 4.2).
e. When class I pumping assembly is to be equipped with hydraulic starting system (see 3.7.1).
f. When lubrication is to be different (see 3.11).
g. Color of finish coat, if different (see 3.19).
h. Packaging requirements (see 5.1).

6.3 First article. When a first article inspection is required, the item will be tested and should be a first production item or it may be a standard production item from the contractor's current inventory as specified in 4.2. The first article should consist of one pumping assembly. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

6.4 Part or Identifying Number (PIN). The specification number and class are combined to form PINs for pumping assemblies covered by this document (see 1.2). PINs for the pumping assemblies are established as follows:

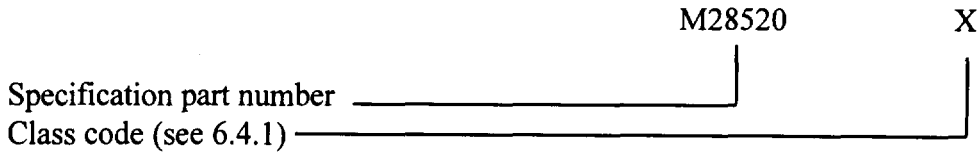

6.4.1 Class to code identifier. The class of the pumping assembly is identified by a single-digit number as shown in table I.

TABLE I. Class to code identifier.

Class	Code number
Class I	1
Class II	2
Class III	3

6.5 Subject term (key word) listing.

Centrifugal pump
JP-5 fuel
Navy special fuel oil
Quick-disconnect flange
Skid-mounted

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Navy - YD1

Preparing Activity:
Navy - YD1

(Project 4320-0033)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T13:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-28520D(YD1)	**2. DOCUMENT DATE (YYMMDD)** 980303

3. DOCUMENT TITLE
PUMPING ASSEMBLY, FLAMMABLE LIQUID, BULK TRANSFER, 600 GALLONS PER MINUTE, DIESEL-ENGINE-DRIVEN

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON *(if applicable)*	**7.DATE SUBMITTED (YYMMDD)**

8. PREPARING ACTIVITY

a. NAME DANNY MUI	b. TELEPHONE *Include Area Code)* (1) Commercial: 805-982-5666 (2) AUTOVON: 551-5666
c. ADDRESS *(Include Zip Code)* COMMANDING OFFICER, NCBC CODE 15E2G 1000 23RD AVENUE PORT HUENEME, CA 93043-4301	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** DEFENSE QUALITY AND STANDARDIZATION OFFICE 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22401-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 202610-20T13:07Z
Check the source to verify that this is the current version before use.