REVISION ACTIVITIES: YD
USER ACTIVITIES: MC, EC
CODE "C"

FED. SUP CLASS
2920

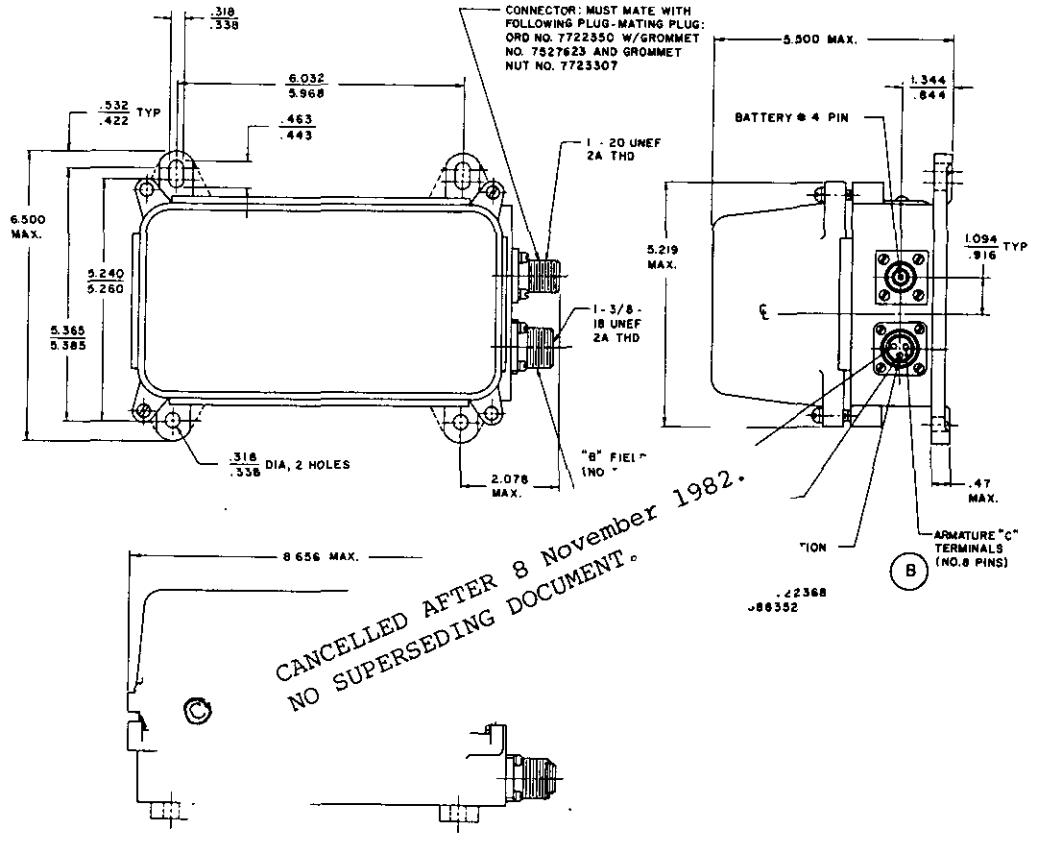

CANCELLED AFTER 8 November 1982.
NO SUPERSEDING DOCUMENT.

NOTES:

1. REGULATOR SHALL PROVIDE THE PERFORMANCE CHARACTERISTICS SPECIFIED IN MS 13804.
2. MODIFICATIONS IN OUTSIDE APPEARANCE AND CONSTRUCTION ACCEPTABLE, PROVIDED UNIT INTERCHANGEABILITY IS NOT AFFECTED.
3. REGULATORS SHOULD BE MOUNTED ON A VERTICAL SURFACE WHICH IS AT RIGHT ANGLE TO AXIS OF ROTATION OF THE ENGINE CRANKSHAFT AND PROVISIONS MADE FOR SHOCK MOUNTING WHERE REQUIRED.
4. REGULATOR SHALL BE PROVIDED WITH 1/8-27 PIPE PLUG FOR TESTING PURPOSES. LOCATION OF PLUG SHALL BE AT OPTION OF MANUFACTURER.
5. REGULATOR SHALL HAVE WARNING PLATE OF RAISED LETTERS INDICATING: "DISCONNECT LEAD AT BATTERY BEFORE SERVICING UNIT."
6. REGULATOR SHALL HAVE NEGATIVE GROUND.
7. THIS REGULATOR IS IDENTIFIED AS TYPE II, GRADE A OF REFERENCED SPECIFICATION.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON INVITATION FOR BIDS.
9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
10. ALL DIMENSIONS ARE IN INCHES.

(B) TITLE CHANGED

APPROVED 29 NOVEMBER 1956 REVISED (A) 12 SEPTEMBER 1962 (B) 29 JUNE 1967 (C) 8 Nov 82

MS PART NO. 13803-1

P.A. ARMY - ME Other Cust NAVY - YD	TITLE REGULATOR, ENGINE GENERATOR(VOLTAGE AND CURRENT 28 VOLT, 40-AMP)	MILITARY STANDARD MS13803
PROCUREMENT SPECIFICATION MIL-R-10265	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

* U.S. GOVERNMENT PRINTING OFFICE: 1982—605-034-2

This Military Standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:29Z
Check the source to verify that this is the current version before use.