FED. SUP CLASS
9540

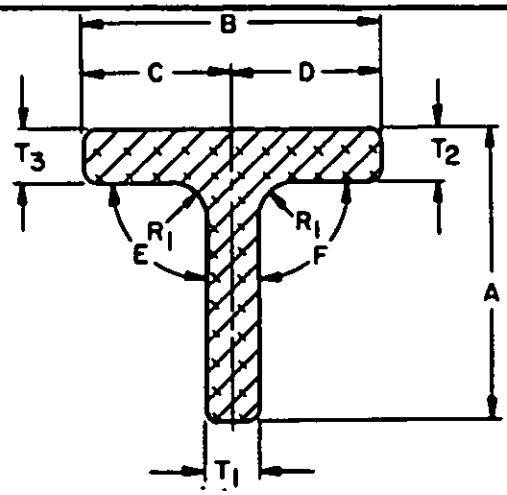


TABLE I. DASH NUMBERS.

| DASH NO | A | B | C | D | E | F | $T_1$ | $T_2$ | $T_3$ | $R_1$ | TIP RADIUS | TEMPER |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 001 | 1.800 | 2.100 | 1.050 | 1.050 | 90° | 90° | .100 | .125 | .125 | .125 | .025 | 0 |
| 003 | 1.800 | 2.100 | 1.050 | 1.050 | 90° | 90° | .100 | .125 | .125 | .125 | .025 | T3511 |
| 005 | 1.800 | 2.100 | 1.050 | 1.050 | 90° | 90° | .100 | .125 | .125 | .125 | .025 | T3511 |
| 007 | 1.875 | 3.000 | 1.500 | 1.500 | 90° | 90° | .080 | .080 | .080 | .125 | .031 | T3511 |
| 009 | 1.875 | 3.000 | 1.500 | 1.500 | 90° | 90° | .080 | .080 | .080 | .125 | .031 | T3511 |
| 011 | 2.000 | 3.120 | 1.560 | 1.560 | 90° | 90° | .120 | .180 | .180 | .125 | .025 | 0 |
| 013 | 2.300 | 3.180 | 1.580 | 1.600 | 90° | 90° | .120 | .280 | .280 | .125 | .025 | T3511 |
| 015 | 2.500 | 2.500 | 1.228 | 1.272 | 90° | 90° | .100 | .850 | .800 | .120 | .032 | T3511 |
| 017 | 2.654 | 5.700 | 2.376 | 3.324 | 78° | 102° | .100 | .130 | .130 | .125 | .031 | T3511 |
| 019 | 2.000 | 2.625 | .962 | 1.663 | 90° | 90° | .125 | .125 | .125 | .090 | .030 | T3511 |
| 021 | 2.850 | 1.960 | .980 | .980 | 90° | 90° | .205 | .125 | .125 | .125 | .030 | T3511 |
| 023 | 2.850 | 1.960 | .980 | .980 | 90° | 90° | .205 | .160 | .160 | .125 | .030 | T3511 |
| 025 | 2.850 | 3.900 | 1.908 | 1.992 | 90° | 90° | .125 | .156 | .156 | .130 | .031 | T3511 |
| 027 | 2.850 | 3.900 | 1.908 | 1.992 | 90° | 90° | .125 | .156 | .156 | .130 | .031 | T3511 |
| 029 | 3.360 | 2.020 | 1.005 | 1.015 | 90° | 90° | .090 | .135 | .135 | .125 | .032 | 0 |
| 031 | 3.360 | 2.020 | 1.005 | 1.015 | 90° | 90° | .090 | .135 | .135 | .125 | .032 | T3511 |
| 033 | 5.500 | 6.000 | 3.000 | 3.000 | 90° | 90° | .125 | .125 | .125 | .250 | .030 | T3511 |
| 035 | 5.500 | 6.000 | 3.000 | 3.000 | 90° | 90° | .125 | .125 | .125 | .250 | .030 | 0 |

REQUIREMENTS:

1. MATERIAL. ALUMINUM ALLOY 2024, (UNS A92024) AS SPECIFIED IN QQ-A-200/3.
2. FORMING PROCESS. EXTRUDED (CODE E).
3. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS14377/EE001

- DASH NUMBER FROM TABLE I
- EXTRUDED (SEE REQUIREMENT 2)
- BASIC MS NUMBER

4. MARKING. ALUMINUM AND ALUMINUM ALLOYS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-184 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. STANDARD LENGTH OF TEE IS 10' MINIMUM, 12' MAXIMUM.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
4. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES:
NAVY - MC, OS, SH

REVIEWER ACTIVITIES:
AIR FORCE - 84
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use should be made from this document.

APPROVED 22 May 1984 REVISED

| P. A. | AS | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|---|
| Other Cost | MR 99 | | TEE, STYLE III ALUMINUM ALLOY 2024 | MS14377 |
| PROCUREMENT SPECIFICATION QQ-A-200 | | SUPERSEDES | | PAGE 1 OF 1 |

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 9540-0108

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:41Z
Check the source to verify that this is the current version before use.