FED. SUP CLASS
5935

User activities: Army ME, AM, WC
Navy MC, OS
Air Force

Reviewer activities: Army MI, MU, AT
Navy AS, SH,
Air Force 11

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 20 Dec. 1965 REVISED (A) 20 May 1970 (B) 23 June 1972

(B)

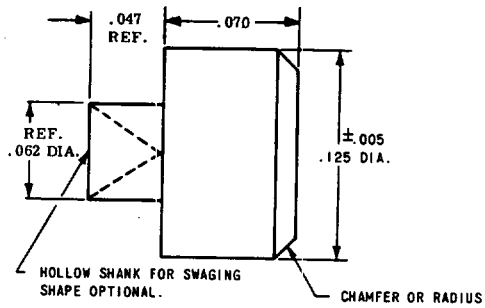

INCHES	MM
.005	.13
.047	1.19
.062	1.57
.070	1.78
.125	3.18

(B) DESIGN STANDARD FOR USE WITH MS18203.

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 (.41 mm).
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Material: Corrosion resistant steel per QQ-S-763 or QQ-S-764, class 302, 303, 303Se, 304 or 316.
5. Finish: Passivated per QQ-P-35.
6. Referenced documents shall be of the issue in effect on date of invitation for bid.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(B) denotes changes

P.A. Navy - EC Other Cust AF-80 Army - EL	International interest	TITLE Pin, straight headed	MILITARY STANDARD MS 18205
Procurement Specification MIL-C-28748		SUPERSEDES:	PAGE 1 OF 1

DD FORM 1 Sep 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-1822-52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:17Z
Check the source to verify that this is the current version before use.