FED. SUP CLASS
1730

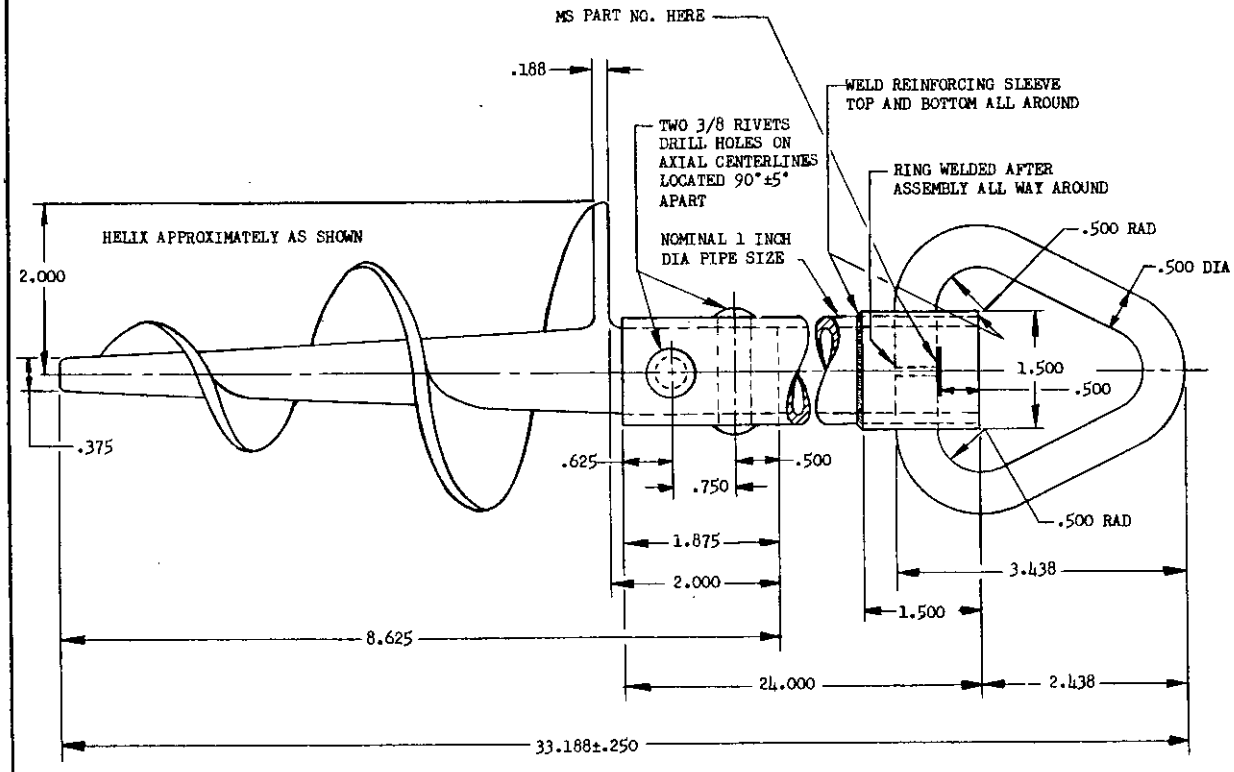

DASH NO.
-1

ANCHOR SHALL WITHSTAND 3000 POUND PULL APPLIED THRU MOORING RING.

MATERIAL: AUGER POINT - MALLEABLE CAST IRON.
PIPE - STANDARD COMMERCIAL STEEL.
RING - COMMERCIAL COLD ROLLED STEEL.
RIVET - STEEL, MS20613-12C24.
DO NOT USE BESSEMER STEEL FOR ANY PART OF THE ANCHOR ASSEMBLY.
FINISH: HOT DIP ZINC COATED (GALVANIZE) 2 OZ PER SQUARE FOOT MIN WEIGHT OF COATING. STRESS RELIEVE PIPE AND RING PRIOR TO COATING
FIT: THERE SHALL BE A SHRINK FIT BETWEEN AUGER SHANK AND PIPE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.062.

DESIGN TORQUE VALUE: 300 FOOT POUND.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 8 Jul 63 REVISED

P.A. USAF-AFSC Other Cust Navy-Wep Army-MO	TITLE ANCHOR - SEMI-PERMANENT MOORING	MILITARY STANDARD MS21300
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AN8014	SHEET 1 OF 1

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:31Z
Check the source to verify that this is the current version before use.