This standard has been approved by the Directorate of Electronic Support (AFALD/PTS), Department of the AF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Review Activity:
AF - 99

FED. SUP CLASS
5950

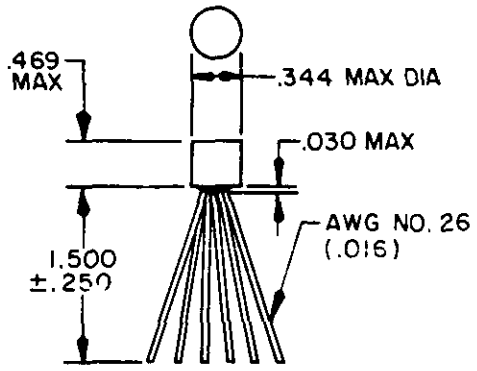

INCHES	MM
.016	.41
.030	.76
.250	6.35
.344	8.74
.469	11.91
1.500	38.10

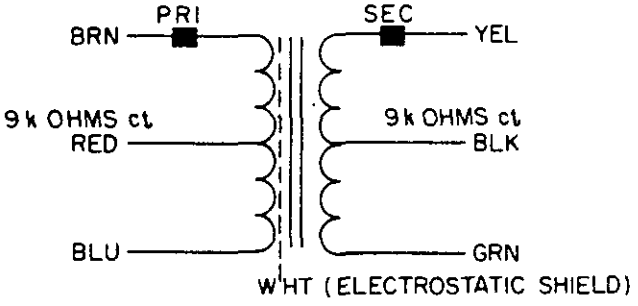

ALTITUDE: 150,000 FT
WORKING VOLTAGE: 49 V PEAK
FREQUENCY RANGE: 300 Hz TO 20 kHz
POWER LEVEL: 100 mW
BRN - RED - BLU = 9 k OHMS ct
YEL - BLK - GRN = 9 k OHMS ct
WHT = ES SHIELD

CIRCUIT DIAGRAM AND MARKING

Ⓑ CANCELED AFTER 14 AUG 79
NO SUPERSEDING STANDARD

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. The number of terminals shall be as shown in schematic.
4. Referenced document shall be of the issue in effect on date of invitation for bids.
5. This standard takes precedence over document referenced herein.
6. For vibration and shock test the specimen shall be rigidly mounted on a printed circuit board.
7. The elevated temperature for thermal shock (step 3, method 107C, MIL-STD-202) shall be 85°C.

Ⓑ DENOTES CHANGE

APPROVED 15 DEC 1972 REVISED Ⓐ 1 JUN 1977 Ⓑ 14 AUG 79

P.A. Air Force-85 Other Cust	International Interest	TITLE	MILITARY STANDARD
		TRANSFORMER, AUDIO FREQUENCY, SUB-MINIATURE, TF5RX13ZZ	MS 21377(USAF)
Procurement Specification MIL-T-27		SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 63 672 (LIMITED COORDINATION) 5950-F188-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:37Z
Check the source to verify that this is the current version before use.