FED. SUP CLASS
6240

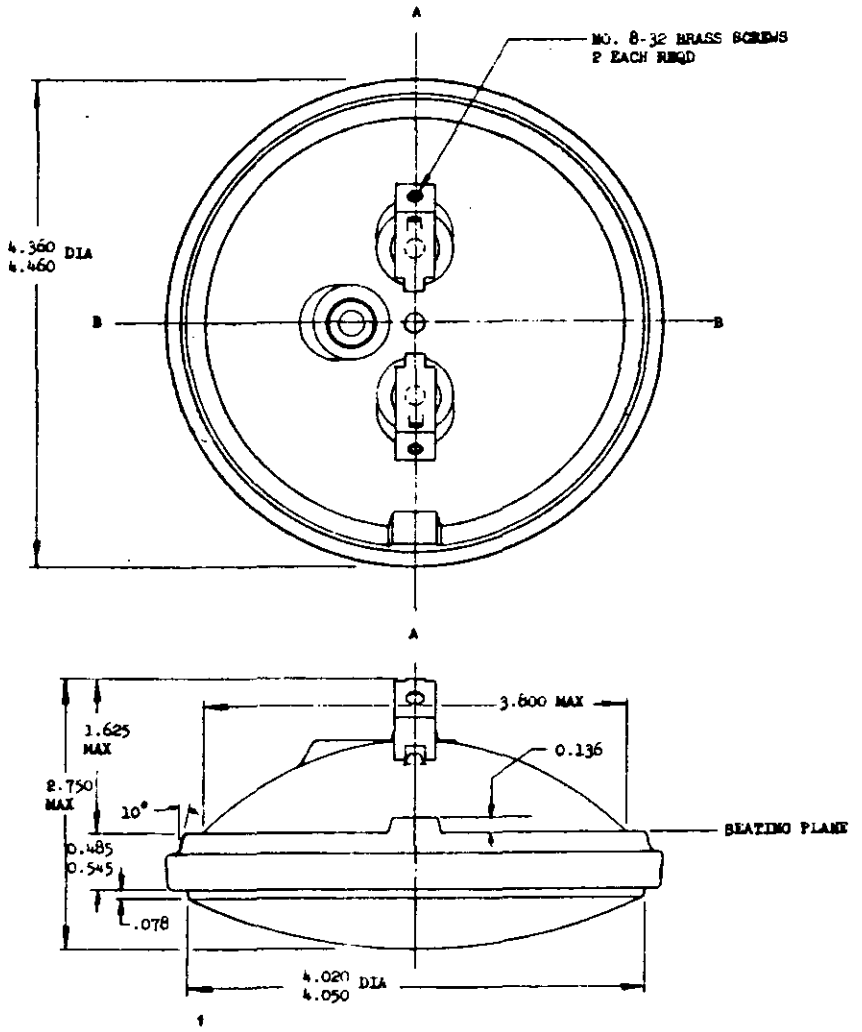

DASH NO.	INITIAL WATTS	RATED AMPERES	RATED AVERAGE LIFE HOURS	MINIMUM BEAM DIMENSIONS			MAXIMUM DEVIATION OF BEAM AXIS FROM MECHANICAL AXIS	MINIMUM PEAK INTENSITY (CANDELAS)	FILAMENT	COVER GLASS
				INTENSITY (CANDELAS)	HORIZONTAL SPREAD (PLANE A-A)	VERTICAL SPREAD (PLANE B-B)				
-1	100±4	20	100	35,000	5°	4°	±1°	80,000	C-6	PLAIN

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.

CANCELLED AFTER 3 AUG 82. NO SUPERSEDING DOCUMENT.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 15 Jun 65 (A) REVISED 3 AUG 82

Review activities: USAF - 11 Navy - WP

This standard is approved by the Department of the Air Force (11) and the Department of the Navy (WP) and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF - 99 Other Cust Navy - WP	TITLE LAMP, INCANDESCENT, PAR 36 AIRPORT LIGHTING, SCREW TERMINAL	MILITARY STANDARD MS21999(ASG)
PROCUREMENT SPECIFICATION MIL-L-0363	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:43Z
Check the source to verify that this is the current version before use.