FED. SUP CLASS
6210

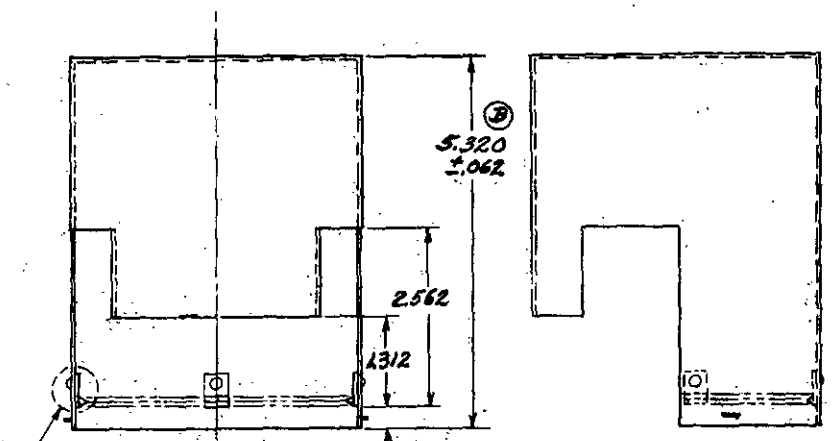

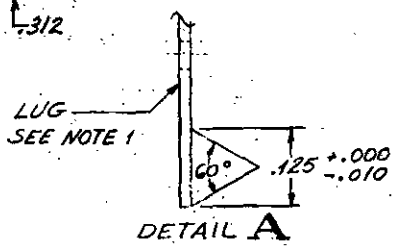

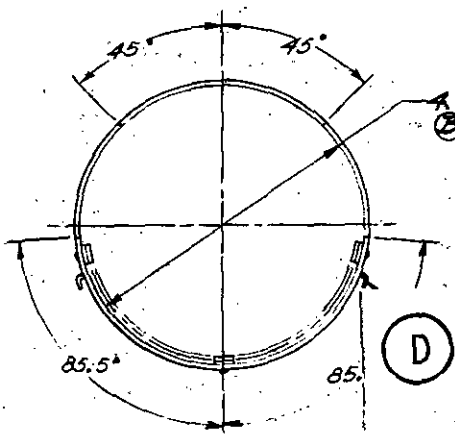

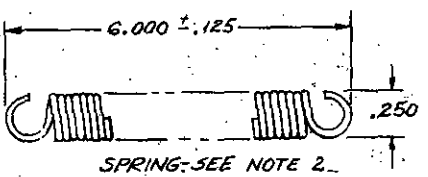

D CANCELLED after 1 May 1975
NO SUPERSEDING STANDARD

NOTE 1. 3 LUGS, OR A CONTINUOUS INSIDE LIP RI

NOTE 2. SPRING, CORROSIVE RESISTANT. PULL OF 4 1/4 ± 1/4 POUNDS REQUIRED TO STRETCH SPRING 1 INCH. HOOKS SHALL ENGAGE ON HOOD HOOKS.

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMAL ±0.016, ANGLES ±1°.

MATERIAL: SHEET ALUMINUM NOT LESS THAN 0.035 INCH THICK.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

MS PART NO.
MS27038-1

APPROVED 8 Jun 61 — REVISED (A) 13 OCT. 61 (B) 1 FEB 62 (C) 25 FEB 69 (D) 1 MAY 1975

P.A. AIR FORCE Other Cust	TITLE: HOOD, BLACKOUT - MEDIUM INTENSITY RUNWAY LIGHT	MILITARY STANDARD MS27038 (USAF)
PROCUREMENT SPECIFICATION MIL-L-7082	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination) — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-518/A-5563

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Department of the Air Force and is mandatory for use by all Air Force military activities as required to employ standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:13Z
Check the source to verify that this is the current version before use.