FED. SUP CLASS
5930





CIRCUIT DIAGRAM

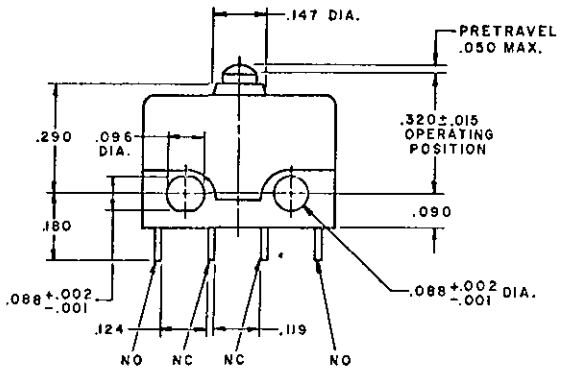

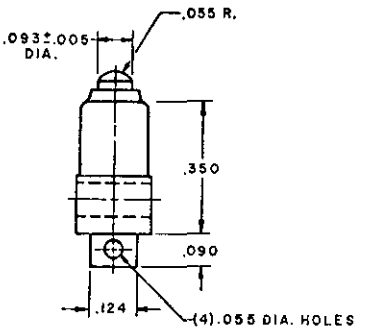

DETAIL REQUIREMENTS:

(A)	CONTACT ARRANGEMENT	SPDT
(B)	ACTUATING FORCE	8 OZ. MAX.
(C)	RELEASE FORCE	1.5 OZ. MIN.
(D)	PRETRAVEL	.050 MAX.
(E)	MOVEMENT DIFFERENTIAL	.010 MIN.
(F)	OVERTRAVEL	.004 MIN.
(G)	MINIMUM OPERATING CYCLES	25,000 CYCLES
(H)	MAXIMUM WEIGHT	.003 LB.
(I)	STRENGTH OF PUSHBUTTON AND PUSHBUTTON STOP	25 LB.
(J)	STRENGTH OF TERMINALS	9 LB.

(K)

RATED LOAD	CURRENT CAPACITY 28 VOLTS DC
RESISTIVE	8 AMP.
INDUCTIVE (50,000 FT.)	3 AMP.
MOTOR	5 AMP.

Ⓐ CANCELLED
FOR PROCUREMENT
USE MIL-S-8805/76

DIMENSIONS: IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 7 DEC 1964 REVISED Ⓐ 11 OCT 1968

Custodian: Air Force - 85
Reviewer: Air Force - 85
"Reviewer/User Information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS"

This standard has been approved by the AFLC, Department of the Air Force and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. AIR FORCE 85 Other Cust	TITLE SWITCH, SENSITIVE, SUB-SUB-MINIATURE	MILITARY STANDARD MS27257(USAF)
PROCUREMENT SPECIFICATION MIL-S-6743	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5930-F230-17

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-513/A-2400

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:20Z
Check the source to verify that this is the current version before use.