FED. SUP CLASS
5935

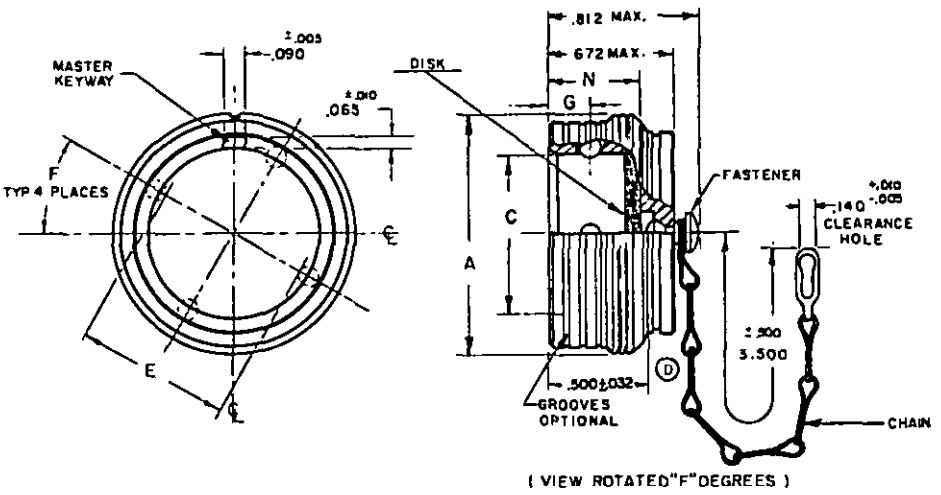

COVER WITH CHAIN

FOR USE WITH PIN OR SOCKET
CONTACT RECEPTACLES

SHELL SIZE	A MAX DIA. COUPLING RING	C MIN I.D. SHELL	E MIN. DIA. BALL SPACING	F BALL LOCATION (ANGULAR)	G ±.001 -.005 BALL LOCATION DEPTH	N ±.010 DEPTH OF VOID
- 3	.796	.438	.391	30°	.202	.500
- 7	.933	.577	.526	22 1/2°	.124	.422
-12	1.140	.713	.661		.202	.500
-19	1.228	.852	.799		.124	.422
-27	1.383	1.007	.954		.202	.500
-37	1.513	1.127	1.076		.124	.422

MATERIAL: COVER - ALUMINUM ALLOY CONFORMING TO MIL-C-26482.
(D) CHAIN - STAINLESS STEEL SASH CHAIN, RR-C-271, TYPE II, CLASS 3, GRADE NO. 8, PASSIVATED.
DISK - CLOSED CELL NEOPRENE SPONGE - MIL-C-3133 CLASS S.B. OR S.C.

EXAMPLE OF PART NO. MS3183 E 19
MS NUMBER — CLASS — SIZE

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS ±.016, ANGLES ±1/2°.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

APPROVED 25 Apr 63 — REVISED (A) 10 Sep 62 (B) 25 Jan 66 (C) 24 May 1967 (D) 20 JAN 1969 (E) 21 JULY 1971

P.A. NAVY-AS Other Cust ARMY-EL	International Interest	TITLE COVER, PROTECTIVE, ELECTRIC CONNECTOR, RECEPTACLE, PUSH-PULL COUPLING	MILITARY STANDARD MS 3183
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 1 OF 1

DD FORM 10 APR 64 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-1761-12

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Distribution for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.