FED. SUP CLASS
2995

MS9134

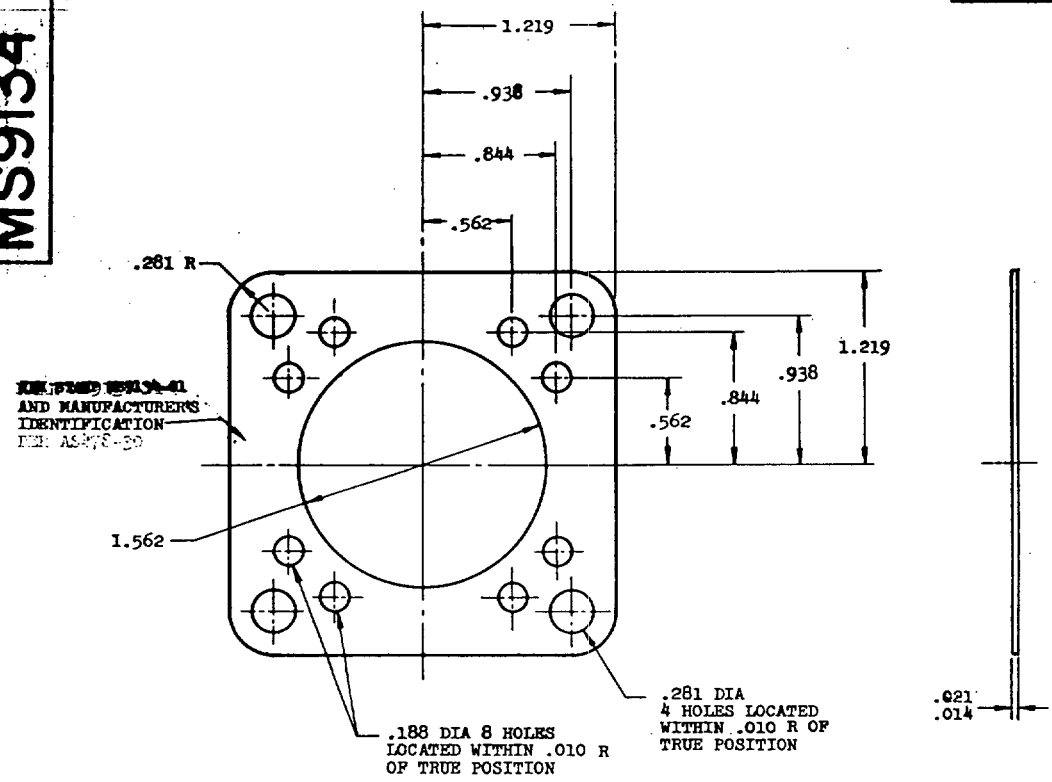

AND MANUFACTURER'S IDENTIFICATION
PER: AS478-30

PART NO.	APPROX WT LB EA
MS9134-01	.005

1. MATERIAL: ASBESTOS AND SYNTHETIC RUBBER SHEET AMS 3232
2. EDGES SHALL BE CLEAN CUT.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010, DIMENSIONS LOCATING TRUE POSITION ARE BASIC.
4. TRUE POSITION TOLERANCES SPECIFIED ARE FOR MAXIMUM MATERIAL CONDITION.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

Review activities: USAF - 11, 71
Navy - WP
Army - MD

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 22 Jun 65 REVISED

P.A. USAF - 11 Other Cust Navy - WP Army - MD	TITLE GASKET - TYPE X OR XV ENGINE ACCESSORY DRIVE	MILITARY STANDARD MS9134
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: AN4045	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 2995-0003-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:10Z
Check the source to verify that this is the current version before use.