MIL-C-3643/8A
14 August 1972
SUPERSEDING
MIL-C-3643/8
21 February 1961

MILITARY SPECIFICATION

CONNECTOR, PLUG, ELECTRICAL, SERIES HN, TYPE UG–495D/U

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

INACTIVE FOR NEW DESIGN.
NO SUPERSEDING DOCUMENT.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for type UG–495D/U, series HN, electrical plug connector.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATION

MILITARY

MIL–C–3643 — Connectors, Coaxial, Radio Frequency, Series HN, and Associated Fittings, General Specification for.

DRAWINGS

BUREAU OF SHIPS

REB10018 — Gasket.
REA10020 — Retainer.
REB10021 — Gasket.
REB10026 — Coupling Nut.
REB10031 — Nut.
REA10035 — Spring.
REB10036 — Washer.
REB10065 — Clamp.
REB10528 — Insulator.
REB10536 — Contact.
REB10839 — Contact.
REB10869 — Body.

(Copies of specifications and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)


3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with Specification MIL–C–3643, and as specified herein.

3.2 Design and construction. The electrical plug connector shall be of the design, construction, and physical dimensions specified on figure 1.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:37Z
Check the source to verify that this is the current version before use.

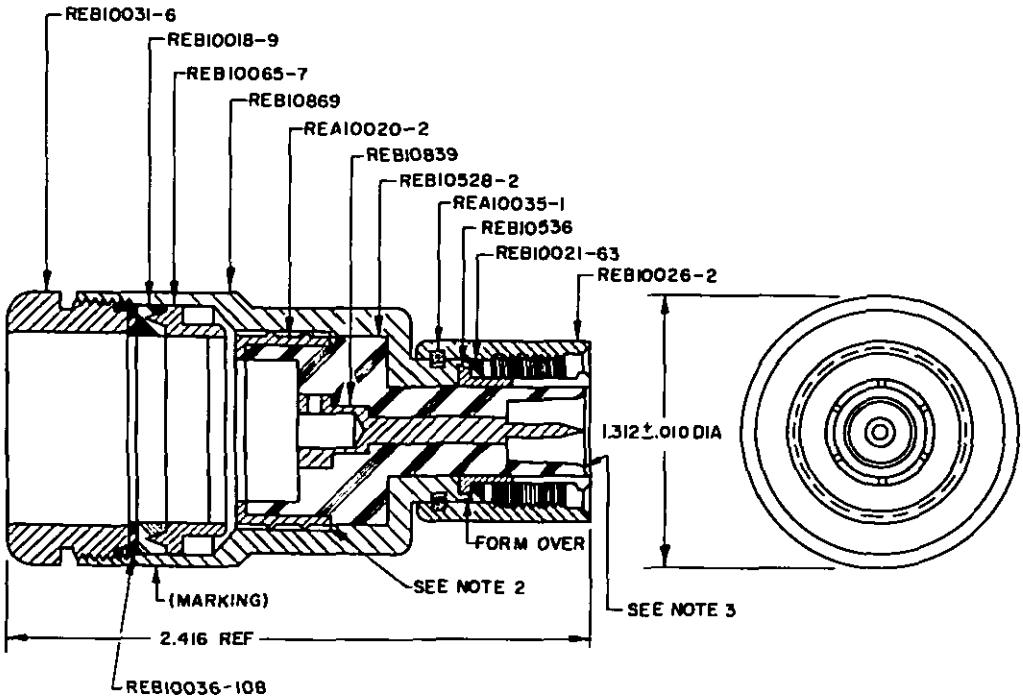

1 All dimensions in inches
2 Contact shall be made all around between surfaces indicated
3 Insulator, REB10528-2, shall be 0.008 min and 0.020 max under flush with end of outer contact, REB10536

FIGURE 1. *Type UG-495D/U electrical plug connector.*

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with Specification MIL-C-3643.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with Specification MIL-C-3643.

6. NOTES

6.1 Notes. In addition to the notes specified herein, the notes specified in Specification MIL-C-3643 are applicable to this specification.

6.2 Intended use. Electrical Plug Connector UG-495D/U is designed for use with Radio Frequency Cable RG-17/U.

6.3 Design data. This electrical plug connector should not be used for new design.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:37Z
Check the source to verify that this is the current version before use.

drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - MI, EL, SL
Navy - AS
Air Force - 80
DSA - ES

User activities:
Army - AT, MU, WC
Navy - SH
Air Force - None

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5935-1835-8)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1972 -714-536/995

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:37Z
Check the source to verify that this is the current version before use.