NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/302(IH)
18 November 2024

DETAIL SPECIFICATION SHEET


BADGE, QUALIFICATION, MASTER COMBAT INFANTRYMAN, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

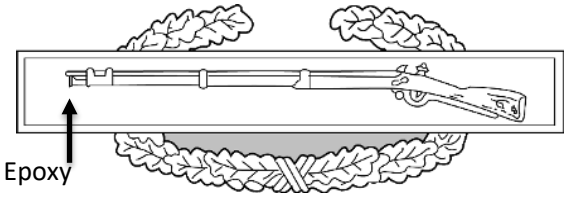


First Award

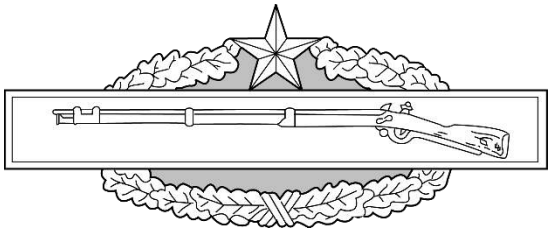

Second Award

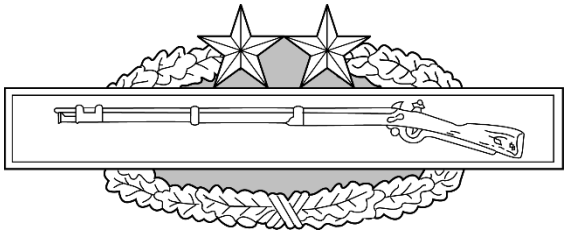

Third Award

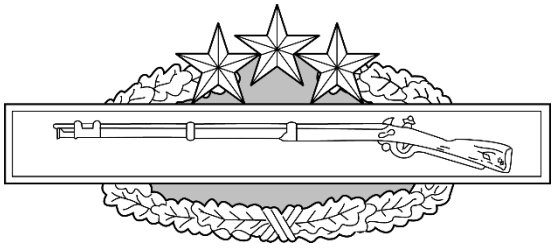

Fourth Award

DASH NO.
-1: 1st Award, Silver-Gold, Regular Size
-2: 2nd Award, Silver-Gold, Regular Size
-3: 3rd Award, Silver-Gold, Regular Size
-4: 4th Award, Silver-Gold, Regular Size
-5: 1st Award, Silver-Gold, Miniature Size
-6: 2nd Award, Silver-Gold, Miniature Size

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:32Z
Check the source to verify that this is the current version before use.

-7: 3rd Award, Silver-Gold, Miniature Size
-8: 4th Award, Silver-Gold, Miniature Size
-9: 1st Award, Silver-Gold, Dress Miniature
-10: 2nd Award, Silver-Gold, Dress Miniature
-11: 3rd Award, Silver-Gold, Dress Miniature
-12: 4th Award, Silver-Gold, Dress Miniature
-13: 1st Award, Subdued, Regular Size
-14: 2nd Award, Subdued, Regular Size
-15: 3rd Award, Subdued, Regular Size
-16: 4th Award, Subdued, Regular Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1 thru -12:
FRAME MUSKET AND STAR(S): Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
WREATH: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
-13 thru -16:
FRAME MUSKET AND STAR(S): Dull, Flat Black Enamel Finish and shall match TIOH metal Finish Chip Number 21.
WREATH: Dull, Flat Brown Enamel Finish and shall match TIOH metal Finish Chip Number 22.

DIMENSIONS:
HEIGHT (Overall):
-1, -13: 1 inch (REF)
-2, -14: 1-3/16 inch (REF)
-3, -15: 1-5/16 inches (REF)
-4, -16: 1-1/64 inches (REF)
-5: 13/16 inch (REF)
-6, -7: 61/64 inch (REF)
-8: 1-1/64 inches (REF)
-9: 7/16 inch (REF)
-10, -11: 1/2 inch (REF)
-12: 9/16 inch (REF)
WIDTH: (Overall):
-1 thru -4, -13 thru -16: 3 inches (REF)
-5 thru -8: 1-3/4 inch (REF)
-9 thru -12: 1-1/4 inch (REF)
THICKNESS (At edge): 0.060 inch $\pm$ 0.005 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:32Z
Check the source to verify that this is the current version before use.

ATTACHING DEVICE:
1: The attaching device shall be prong and wing type clutch.

2: Prongs shall be located on the horizontal center line and equidistant from each end. For regular size, the prongs shall be 2 inches ± 1/64 inch apart. For miniature size and dress miniatures, the prongs shall be 1 inch ± 1/64 inch apart.

PIERCING:
1: Piercing shall be a s indicated in shaded areas.

2: Pierced areas for the dress miniatures shall be as indicated below:
-9: As indicated.
-10: As indicated except no piercing under star.
-11: Bottom wreath and between the two stars only (center area).
-12: Bottom wreath and between the three stars only (center area).

EPOXY: Epoxy shall be light blue TIOH Color Chip No. 30. Epoxy resin shall be smooth and flush with the bottom of the rifle,

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A forcer may be used to bring up the musket only.

3. For commercial sale, Frame and Star(s)Silver Plated Oxidized Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14 and Wreath, Gold Plated, Matte Finish Chip Number 7 may be used for commercial sale.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2025-031)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:32Z
Check the source to verify that this is the current version before use.