
NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/304(IH)
18 November 2024


DETAIL SPECIFICATION SHEET
BADGE, QUALIFICATION, MASTER COMBAT ACTION, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3628.

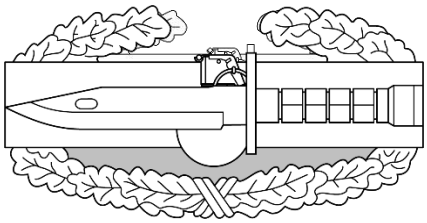

First Award

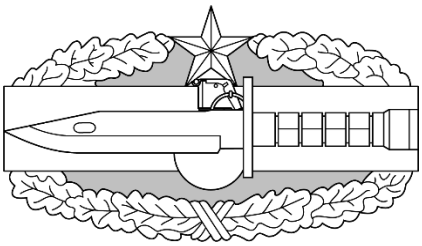

Second Award

DASH NO.

-1: 1st Award Regular Size
-2: 2nd Award Regular Size
-3: 1st Award Miniature Size
-4: 2nd Award Miniature Size
-5: 1st Award Dress Miniature
-6: 2nd Award Dress Miniature
-7: 1st Award Regular Size Subdued
-8: 2nd Award Regular Size Subdued

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
-1 thru -6: Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
WREATH: 24K Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
-7 and -8: Dull, Flat Black Enamel Finish TIOH Metal Finish Chip Number 21.
WREATH: Dull, Flat Brown Enamel Finish and shall match TIOH Metal Finish Chip Number 22.

DIMENSIONS:

HEIGHT (Overall):
-1, and -7: 1 inch (REF)
-2, and -8: 1-1/8 inch (REF)
-3: 5/8 inch (REF)
-4: 11/16 inch (REF)
-5: 7/16 inch (REF)
-6: 15/32 inch REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:32Z
Check the source to verify that this is the current version before use.

WIDTH (Overall):
-1, -2, -7, -8: 2 inches (REF)
-3, -4: 1-3/16 inches (REF)
-5, -6: 13/16 inch (REF)
THICKNESS (at thickest point):
-1, -2, -7, -8: 0.100 ± 0.010
-3, -4: 0.082 ± 0.05
-5, -6: 0.065 ± 0.05

ATTACHING DEVICE:
1. Attaching device shall be prong and wing type clutch.

2. Two prongs shall be located on the reverse on the horizontal center line, equidistant from each end and the following distance apart. For -1, -2, -7, -8: 1-1/4 inches ± 1/64 inch apart. For -3, -4: 1 inch ± 1/64 inch apart, For -5, -6: 3/4 inch ± 1/64 inch apart.

PIERCING: Piercing shall be as indicated with gray shading

FORCER: A forcer shall e used to bring up the design of the bayonet.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. -1 thru -6 Silver Plated, Oxidized, Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14 and Wreath 24K Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7. May be used for commercial sale.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2025-033)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:32Z
Check the source to verify that this is the current version before use.