NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/306A(IH)
30 March 2026
SUPERSEDING
MIL-DTL-3628/306(IH)
17 December 2025

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, MARINER, BASIC, SENIOR AND MASTER, U. S. ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.



BASIC



SENIOR



MASTER

DASH NO.
-1: Basic, Regular Size
-2: Basic, Miniature Size
-3: Senior, Regular Size
-4: Senior, Miniature Size
-5: Master, Regular Size
-6: Master, Miniature Size
-7: Basic, Regular Size, Subdued
-8: Senior, Regular Size, Subdued
-9: Master, Regular Size, Subdued

MATERIAL (-1 through -9) Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:

1. -1 through -6: Nickel plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 16.
2. -1 through -6 Silver Plated, Oxidized, Buffed Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.
3. -7 through -9: Dull Flat Black Enamel and shall match TIOH Metal Finish Chip Number 21.

DIMENSIONS:
BASIC:
HEIGHT:
-1: 2-inches (REF)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:32Z
Check the source to verify that this is the current version before use.

-2: 1-1/2 inches (REF)
WIDTH:
-1: 1-29/32 inches (REF)
-2: 1-7/16 inches (REF)
THICKNESS (at outer rim of helm):
-1: 0.121 inch ± 0.010 inch
-2: 0.105 inch ± 0.010 inch

SENIOR:
HEIGHT:
-3: 2-inches (REF)
-4: 1-1/2 inches (REF)
WIDTH:
-3: 2-1/32 inches (REF)
-4: 1-17/32 inches (REF)
THICKNESS (at outer rim of helm):
-3: 0.121 inch ± 0.010 inch
-4: 0.105 inch ± 0.010 inch


MASTER:
HEIGHT:
-5: 2-inches (REF)
-6: 1-1/2 inches (REF)
WIDTH:
-5: 2-1/32 inches (REF)
-6: 1-17/32 inches (REF)
THICKNESS (at outer rim of helm):
-5: 0.121 inch ± 0.010 inch
-6: 0.110 inch ± 0.010 inch

ATTACHING DEVICE:

1. The attaching device shall be prong and wing type clutch.

2. Prongs for -1 and -2, shall be located on the reverse on a 1-3/8” diameter circle, the bottom prong located on the vertical center line 1/8” from the bottom, the left and right prongs placed 45° on either side of the center line from the top.

3. Prongs for -3 shall be located on the reverse on a 1-3/4” diameter circle placed 120° apart, the bottom prong located on the vertical center line 1/8” from the bottom.

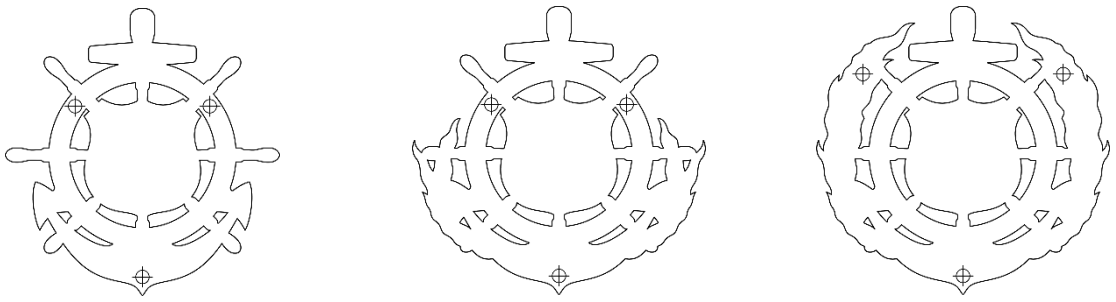

BASIC **SENIOR** **MASTER**

Prong Placement Indicators

OBVERSE: The shield with helm and wing shall be modeled. Shaded areas to be pierced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:32Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercings shall be as indicated above in the shaded areas.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-238)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:32Z
Check the source to verify that this is the current version before use.