MIL-C-3636C
15 November 1969
SUPERSEDING
MIL-C-3636B
30 December 1963

MILITARY SPECIFICATION

CORDS AND TASSELS, FLAG

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers the requirements for cords and tassels to be used with flags (see 6.1).

1.2 Classification.- Cords and tassels shall be of the following classes, as specified (see 6.2):

Class 1	-	Old Glory Red, White and National Flag Blue
Class 2	-	Defense Blue and White
Class 3	-	Scarlet and White
Class 4	-	Old Glory Blue and White
Class 5	-	Ultramarine Blue and Air Force Yellow
Class 6	-	Silver Gray, Black and Golden Yellow
Class 7	-	Golden Yellow
Class 8	-	Scarlet and Golden Yellow

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

MMM-A-125	-	Adhesive, Casein-Type, Water and Mold Resistant
PPP-B-601	-	Boxes, Wood, Cleated-Plywood
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	-	Box, Fiberboard
PPP-B-676	-	Boxes, Set-Up, Paperboard

/FSC 8345/

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:34Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

Fed. Std. No. 191 - Textile, Test Methods

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications, standards and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

U.S. Army Color Card, The Official Colors for Arms and Services
Standard Color Card of America, 9th Edition
Spring Silk Card of 1924

(Application for copies of the above color cards should be addressed to The Color Association of the United States, Inc., 200 Madison Ave., NYC, NY 10016)

3. REQUIREMENTS

3.1 Guide sample.- Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample in which case this specification shall govern.

3.2 First article sample.- Unless otherwise specified (see 6.2), before production is commenced, the contractor shall submit one sample of each class of the finished item to the contracting officer or his authorized representative for inspection as specified in 4.2. The approval of the first article sample authorizes the commencement of production but does not relieve the contractor for compliance with all applicable provisions of this specification. The first article sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:34Z
Check the source to verify that this is the current version before use.

3.3 Material.-

3.3.1 Rayon yarn.- The yarn shall be continuous multifilament bright regenerated cellulose rayon. If the cord is machine twisted there shall be a minimum of 15 ends of 300 denier, 44 filaments per end; if hand twisted there shall be a minimum of 6 ends of 300 denier, 44 filaments per end.

3.3.2 Cotton yarn.- The cotton used in the manufacture of the yarn shall be cleaned, carded, drawn, spun and twisted into a ply yarn. The yarn size shall be not coarser than 12/2.

3.3.3 Wood.- The wood used for the mould shall be clear, straight grained hardwood of a species listed below. The wood shall be free from checks or other defects which might affect serviceability.

Ash, white	Locust, black
Birch, sweet or yellow	Maple, sugar or black (hard)
Beech	Oak, red or white
Elm, rock	Pecan

3.3.4 Wire.- Wire used for interlocking the skirt heading shall be a suitable nonferrous metal wire, number 36.

3.4 Design.- Design shall be a twisted cord with a tassel at each end (see figure 1).

3.5 Color.- The colors of the component parts shall be as specified in table I. The rayon or cotton yarns used in component parts of the cord and tassels shall be dyed. When cotton yarn is used as a core for rayon yarns, the cotton and rayon yarns shall match for color. Each color shall match the cable number as specified in table I. The use of sulfur dyes and dyes containing elementary sulfur or compounds capable of oxidation to sulfuric acid is prohibited. The dyestuffs shall be chosen and applied so that the dyed yarn shall show no more free or sulfide sulfur than the standard sample when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 20261-16T20:34Z
Check the source to verify that this is the current version before use.

TABLE I Colors of cords and tassels components.-

Class	Cord	Cable No.	Braid over wood mould	Skirt	Crouse and bezer cord
1	Old Glory Red White National Flag Blue	70180 65005 70077	Old Glory Red White National Flag Blue	Old Glory Red White National Flag Blue	Old Glory Red - -
2	Defense Blue White	1120 65005	Defense Blue -	Defense Blue -	Defense Blue -
3	Scarlet White	65006 65005	Scarlet White	Scarlet White	Scarlet -
4	Old Glory Blue White	70075 65005	Old Glory Blue White	Old Glory Blue White	Old Glory Blue -
5	Ultramarine Blue Air Force Yellow	65010 70068	Ultramarine Blue Air Force Yellow	Ultramarine Blue Air Force Yellow	Ultramarine Blue -
6	Silver Gray Black Golden Yellow	65008 65018 65001	Silver Gray Black Golden Yellow	Silver Gray Black Golden Yellow	- Black -
7	Golden Yellow	65001	Golden Yellow	Golden Yellow	Golden Yellow
8	Scarlet Golden Yellow	65006 65001	- Golden Yellow	Scarlet Golden Yellow	Scarlet -

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:34Z
Check the source to verify that this is the current version before use.

3.5.1 Matching.- The color shall match the approved standard shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin and shall be good approximation to the standard shade under incandescent lamplight at 2800 degrees Kelvin.

3.5.2 Colorfastness.- The dyed material shall show fastness to wet-dry cleaning, crocking and light equal to or better than the standard sample. When standard color samples have not been established the dyed material shall show good fastness to wet-dry cleaning, crocking and light.

3.6 Construction.-

3.6.1 Cords.- The finished cord shall be not less than 1/4 inch nor greater than 5/16 inch in diameter, and shall have a minimum of one turn of twist per inch. The cord shall be constructed of 3 strands twisted together. Each strand shall have 40 ends of 12/2 cotton thread as a core and machine wound with 15 ends or hand wound with 6 ends of 300 denier rayon. When 2 colors are used there shall be 2 strands of first named color and 1 strand of second named color.

3.6.2 Tassels.- The tassels for the various classes shall be composed of rayon yarn. The tassels shall consist of a braided covered wood mould with a fringe or skirt attached to the bottom of the mould. The color effect for a braided cover which contains two or more colors (see table I) shall be achieved by alternating each color in series of three carriers on a 72-carrier machine with a two over and two under plain stitch. This braiding shall be accomplished by the use of 3 ends of 300 denier rayon yarn per carrier.

3.6.2.1 Wood mould (for tassels).- A wood mould of the dimensions and shape shown in figure 1, shall be turned from a type of wood specified in 3.3.3 and shall be covered with braid.

3.6.2.2 Fringe or skirt bullion.- The fringe shall consist of a skirt with a bullion length of 4 $\pm$ 1/4 inches containing 69 $\pm$ 2 pieces of bullion in colors specified in table I. When two or more colors are specified, they shall be alternated around the skirt. In addition, there shall be attached to the bullion 4 lengths of Bezer cord (a twisted braid) 4 $\pm$ 1/4 inches in length and of the color specified in table I. The Bezer cords shall be spaced evenly around the circumference of the skirt. The bullion shall be composed of five ends of 12/2 cotton as a core and wound with 4 ends of 300 denier rayon with a minimum of three turns per inch. The Bezer cord shall consist of a core composed of not less than 9 ends nor more than 20 ends of 12/2 cotton wound with sufficient ends of 300 denier rayon for a covering and twisted in a corkscrew fashion around one end of 12/2 cotton yarn. The heading of the skirt shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:34Z
Check the source to verify that this is the current version before use.

flush against the head end and the skirt shall be lashed together by 4 ends of interlocking wire (see 3.3.4). Two ends of cotton thread and 4 ends of interlocking wire shall lash the twisted braid to the skirt bullion.

3.6.2.3 Crouse cord.- The crouse cord shall consist of eight (8) strands divided into 4 groups or sections, evenly spaced around the mould. Each strand shall be composed of a core consisting of 2 ends of 12/2 cotton wound with 3 ends of 300 denier rayon and twisted in a corkscrew fashion around one end of crimped 300 denier rayon yarn. Each group or section shall consist of 2 strands with the ends tucked securely on the inside of the mould and securely bound at both necks of the mould with 300 denier rayon yarn as shown on figure 1. The color of the crouse cord shall be as specified in table I, and the rayon bands around each neck shall match the color of the crouse cord.

3.7 Assembly.- The cord and tassels shall be assembled in the following manner. All excessive braid at both ends of the wood mould shall be neatly tucked inside the center hole of the mould and glued securely. Care shall be taken to insure this braid will not impede the passage of the cord. The crouse cord shall then be attached to the braid cover mould, the ends of the crouse cord shall be tucked inside the centerhole of the mould and the crouse cord shall be bound to the mould by rayon bands as shown on figure 1. The bullion skirt shall then be securely tucked in the head of the mould and glued to the braid. Finally the finished cord shall be threaded through the centerhole of each tassel and the ends tightly knotted and glued to the base of the mould. The glue used in the assembly shall conform to MMM-A-125.

3.8 Length.- The finished overall length of the cord and tassels (tassel end to tassel end) shall be 8 feet, 6 inches, $\pm$ 1 inch.

3.9 Workmanship.- The finished cords and tassels shall be clean, well made and shall conform to the quality and grade of product established by this specification. Occurrences of defects shall be limited by the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the perscribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-16T20:34Z
Check the source to verify that this is the current version before use.

4.2 First article sample inspection.- When a first article sample is required, inspection and testing of the first article shall be made for all provisions of this specification applicable to the end product examination and tests.

4.3 Sampling for inspection and acceptance.- Sampling for inspection and acceptance shall be made in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.3.1 Testing of components.- In addition to the quality assurance provisions of subsidiary specifications and drawings, components shall be tested as specified in table II. When the data in the "#determ per sample unit" and "Results reported as" columns are not specified in table II, they shall be as required by the referenced test method. All requirements are applicable for the individual sample unit. The inspection level shall be S-1 and the acceptable quality level for sample unit requirements shall be 6.5 defects per hundred units. The sample unit for test in table II shall be one cone, spool or tube for each component.

Source: https://assist.dla.mil -- Downloaded: 20261-16T20:34Z
Check the source to verify that this is the current version before use.

TABLE II Component testing.-

Component	Characteristic	Rqm't paragraph	Test 1/ method	#determ per s/u	Results reported as
Rayon yarn for cord, fringe or skirt, crouse cord and bezer cord	Material identification	3.3.1 and 3.6.2.3	1500 or 1520	1	Pass or fail
	Size of yarn	3.3.1 and 3.6.2.3	4021	1	Nearest whole number
	Number of filaments	3.3.1 and 3.6.2.3	Visual	1	Nearest number
	Sulfur content	3.5	4.4.1	1	Pass or fail
	Colorfastness to:				
	Light	3.5.2	4660	1	
	Crocking	3.5.2	4650	1	
	Wet-dry cleaning	3.5.2	4622	1	
Cotton stuffer yarn for core of cord, bezer cord and crouse cord	Material identification	3.3.2 and 3.6.2.2	1200	1	Pass or fail
	Size of yarn	3.3.2 and 3.6.2.2	4020	1	Nearest whole number
	Ply of yarn	3.3.2 and 3.6.2.2	Visual		Nearest number
	Sulfur content	3.5	4.4.1	1	Pass or fail
	Colorfastness to:				
	Light	3.5.2	4660	1	
	Crocking	3.5.2	4650	1	
	Wet-dry cleaning	3.5.2	4622	1	

1/ Test methods referenced are from Fed. Std. 191.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:34Z
Check the source to verify that this is the current version before use.

4.3.1.1 Certification of compliance.- Components and materials listed below may be accepted on the basis of a contractor's certification of compliance for characteristics indicated.

Component	Characteristic	Rqm't para
Wire	Material identification	3.3.4
Wood	Species identification	3.3.3

4.3.2 In-process inspection.- Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance. In-process inspection shall be conducted to see that accomplishment of the following is in accordance with the specification requirements.

Assembly and operation	Rqm't para.
Assembly of excessive braid at both ends of wood mould.	3.7
Assembly of crouse cord to mould.	3.7
Assembly of bullion skirt to head end of the mould.	3.7
Assemlby of finished cord to tassel component.	3.7

4.3.3 Inspection of end item.-

4.3.3.1 Visual examination of cord and tassels.- The defects found during examination shall be classified in accordance with 4.3.1.1 and 4.3.1.2. The lots shall be inspected in accordance with 4.3.1.3. The unit of product for these examinations shall be one completely fabricated cord and tassels.

4.3.3.1.1 Examination of cord and tassels, for defects in design, material, construction, and workmanship.- Defect designated by an asterisk (*) shall be classified as major when seriously affecting appearance or serviceability and minor when affecting appearance or serviceability but not seriously.

Examine	Defect	Major	(*)	Minor
Cords	Class other than specified	X	-	-
	Color or color combination not as specified.....	X	-	-
	Not fabricated from specified material.....	X	-	-
	Spot, stain or soiled.....	-	*	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:34Z
Check the source to verify that this is the current version before use.

Examine	Defect	Major	(*)	Minor
	Has objectionable odor	-	-	X
	Core not completely covered	-	*	-
	Cut, tear or other imperfection	-	*	-
	Frayed edges	-	*	-
	Cord other than required construction	X	-	-
	Pulled thread(s)	-	*	-
	Cord not continuous length, i.e., pieced	-	-	X
Tassels	Wood mould not covered with specified material	X	-	-
	Not fabricated from specified material	X	-	-
	Wood mould not completely covered with braiding	-	*	-
	Wood mould loosely or unevenly covered	-	*	-
	Evidence that contour of wood mould is not as specified	-	*	-
	Covering or fringe cord frayed or damaged	-	*	-
	Pulled thread(s)	-	*	-
	Braid ends not securely glued as required	-	*	-
	Spot, stain or soiled	-	*	-
	Any component missing	X	-	-
	Cut, tear or other imperfection	-	*	-
	Crouse cord not banded as required	X	-	-
	Crouse cord not corkscrew twist effect	-	-	X
	Fringe not fabricated from specified material	X	-	-
	Fringe insecurely or not neatly attached	-	*	-
	Fringe not attached as specified	-	*	-
	Fringe not in alternating colors (when 2 or more colors are used)	-	-	X
	Ends of fringe uneven	-	*	-
	Bezer cord not positioned equidistant around the circumference of the skirt	-	*	-
	Bezer cord not twisted as required	-	-	X

Source: https://assist.dla.mil -- Downloaded: 20261-16T20:34Z
Check the source to verify that this is the current version before use.

4.3.3.1.2 Examination of cord and tassels, for defects in dimensions.- Any dimension that is not within the specified tolerances shall be classified as a defect.

4.3.3.1.3 Inspection levels and AQL's.- The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

	Inspection level	AQL	
		Major	Total
For defects applicable to 4.3.3.1.1	I	2.5	6.5
For defects applicable to 4.3.3.1.2	S-3	one class	4.0

4.3.3.2 Testing of the end item.- Testing of the completely fabricated cord and tassels, flag shall be performed in accordance with table III below for the characteristics shown herein. The sample unit shall be three completely fabricated cord and tassels, flag. The inspection level shall be S-1 and the acceptable quality level shall be 6.5. Requirements are applicable to the individual unit.

Source: https://assist.dla.mil -- Downloaded: 20261-16T20:34Z
Check the source to verify that this is the current version before use.

TABLE III

Characteristic	Rqm't para	1/ Test method	#determs per s/u	Results reported as
Cords:				
Color of rayon and cotton yarns	3.5, 3.6.1 & table I	Visual	1	Pass or fail
Color combination	3.6.1 & table I	Visual	1	Pass or fail
Diameter	3.6.1	Std. Com'l	2	Average of 2 determ to nearest 1/32 in.
Turns per inch	3.6.1	4054	1	Nearest number
Number of strands	3.6.1	Visual	1	Nearest number
Number of rayon wound ends	3.6.1	Visual	1	Nearest whole number
Tassels:				
Color of rayon yarns in braided covers	3.5, 3.6.2 & table I	Visual	1	Pass or fail
Color combination of braided covers	3.6.2 & table I	Visual	1	Pass or fail
Braiding stitch of covers	3.6.2	Std. Com'l	1	Pass or fail
Number of braiding ends per carrier in covers	3.6.2 2/	Visual	1	Nearest number
Number of carriers	3.6.2 2/	Visual	1	Nearest number
Fringe or skirt				
Bullion of Tassels:				
Color of rayon and cotton yarns	3.5, 3.6.2.2 table I	Visual Visual	1 1	Pass or fail Pass or fail
Color combination	3.6.2.2 & table I	Visual	1	Pass or fail
Bullion length	3.6.2.2	Std Com'l	2	Average of 2 determined to the nearest 1/16 inch
Number of shots per bullion length	3.6.2.2	Std Com'l	1	Nearest whole number
Number of lengths of twisted braid (Bezer cord)	3.6.2.2	Visual	1	Nearest number
Length of twisted braid (Bezer cord)	3.6.2.2	Std Com'l	2	Average of 2 determined to the nearest 1/16 inch
Number of bullion ends	3.6.2.2	Std Com'l	1	Nearest number

Source: https://assist.dla.mil -- Downloaded: 20261-16T20:34Z
Check the source to verify that this is the current version before use.

Characteristic	Rqm't para	1/ Test method	#determs per s/u	Results reported as
Number of rayon wound ends for bullion	3.6.2.2	Visual	1	Nearest number
Turns per inch	3.6.2.2	4054	1	Nearest whole number
Number of twisted braid ends (Bezer cord)	3.6.2.2	Std Com'l	1	Nearest number
Size of twisted braid core yarn	3.6.2.2 2/	4020	1	Nearest whole number
Ply of twisted braid core yarn	3.6.2.2	Visual	1	Nearest number
Number of cotton thread ends	3.6.2.2	Visual	1	Nearest number
Wire of Tassels:				
Number of inter-locking wire ends	3.6.2.2	Visual	1	Nearest number
Crouse Cord of Tassels:				
Color of rayon and cotton yarns	3.5, 3.6.2.3 table I	Visual	1	Pass or fail
Number of strands	3.6.2.3	Visual	1	Nearest number
Number of core ends	3.6.2.3	Visual	1	Nearest whole number
Number of rayon wound ends	3.6.2.3	Visual	1	Nearest number
Number of crimped rayon yarn ends	3.6.2.3	Visual	1	Nearest number
Color of crouse cord rayon bands	3.6.2.3 & table I	Visual	1	Pass or fail

[1]Test Method referenced are from Fed Std 191.
[2]Contractor may submit a certificate of compliance for this characteristic.

4.3.3.3 Examination for count of cord and tassels, flag in intermediate containers.- Cord and tassels, flag packaged for shipment shall be examined to determine conformance with package markings and specified quantity. The sample unit for this examination shall be one box (interior package). Any box containing less than the specified or marked quantity of cord and tassels, flag shall be classified as a defect. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units. The lot size shall be the number of intermediate containers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:34Z
Check the source to verify that this is the current version before use.

4.3.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that applicable packaging, packing, and marking requirements are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, or improper size, location, sequence, or method of application.
Materials	Any component missing.
	Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liner, container, flaps, loose strapping, inadequate stapling.
	Bulging or distortion of containers.
	Unit packages not heat sealed.
Weight	Gross/net weight exceeds requirements.
Content	Number of intermediate packages is more or less than required.

4.4 Test methods.-

4.4.1 Test for sulfur content.-

4.4.1.1 Solution (acid stannous chloride).- Dissolve 100 grams of stannous crystals in 100 ml. of hydrochloric acid (35 percent concentration) and add 50 ml. of distilled water.

4.4.1.2 Procedure.- One to 1.5 grams of the finished yarn, cut into small lengths, shall be used for the test. Place the sample in a test tube of suitable size and cover with stannous chloride solution. Place a filter paper which has been moistened with one drop of 5.0 percent lead acetate solution (made by dissolving 5 grams of reagent grade lead acetate to 100 ml. of distilled water; add a drop of glacial acetic acid to clear up if cloudy) over the mouth of the tube (punch needle hole in paper). Heat the tube slowly over a low flame until the solution is boiling. The solution shall not be boiled for more than 10 to 15 seconds as prolonged boiling will reduce the sensitivity of the test. A brown to black stain appearing on the paper indicates the presence of sulfur.

Source: https://assist.dla.mil -- Downloaded: 20261-16T20:34Z
Check the source to verify that this is the current version before use.

4.4.1.3 Evaluation.- The stained filter paper shall be compared with that obtained from the standard. If the stained area is equal to or lighter than the standard in degree of staining, the sample shall be considered satisfactory. If the degree of staining by the sample is in excess of the standard, the sample shall be considered unsatisfactory.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.-

5.1.1.1 Unit packaging.- Each cord and tassel shall be folded to approximately 8 ½ inches in length and placed in a snug-fitting transparent polyethylene bag with a film thickness of not less than 0.002 inch. All seams and closures shall be affected by heat sealing. Prior to or during the heat sealing operation all excess air shall be removed.

5.1.1.2 Intermediate packaging.- Ten cords and tassels of one class only packaged as specified in 5.1.1.1 shall be packaged in a set-up paperboard box conforming to type I, variety 2, class A, style 4 of PPP-B-676. Box closure shall be in accordance with the appendix of the container specification.

5.1.2 Level C.- Cords and tassels shall be packaged to afford adequate protection against deterioration and damage during shipment from the supply source to the first receiving station. The suppliers commercial method may be used provided it meets these requirements.

5.2 Packing.- Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.- Cords and tassels of one class only packaged as specified in 5.1 shall be packed in a snug-fitting shipping container conforming to class 2 of PPP-B-621 or overseas type, Style A, B, I or J of PPP-B-601. Closure shall be in accordance with the appendix of the appliable specification.

5.2.2 Level B.- Cords and tassels of one class only packaged as specified in 5.1 shall be packaged in a snug-fitting fiberboard shipping container conforming to type CF, or SF, class domestic, Grade 27 of PPP-B-636. Closure shall be in accordance with the appendix of the container specification. Toward the end of a contract or where there are less than the required amount of one class to fill a shipping container, mixed classes may be packed within a shipping container.

Source: https://assist.dla.mil -- Downloaded: 20261-16T20:34Z
Check the source to verify that this is the currentversion before use.

5.2.3 Level C.- Cords and tassels packaged as specified in 5.1 shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. Shipping containers shall be in accordance with the rules and regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages.- Polyethylene bagged packages shall have the required information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

MANUFACTURER'S NAME
STOCK NUMBER
NOMENCLATURE
CLASS
CONTRACT NUMBER

5.3.2 Labels, mixed classes.- Each shipping container packed with mixed classes shall have securely attached to the end and side, directly under the printing or stencilling, a white paper label 5 by 4 inches with the words "MIXED CLASSES" plainly printed thereon and under these words shall be legibly printed the correct quantity and classes contained therein.

6. NOTES

6.1 Intended use.- The cords with tassels covered by this specification are to be used with flags as indicated:

Class 1 - Old Glory red, white, and National Flag Blue
- (a) National colors.
- (b) President of the United States of America.

Class 2 - Defense blue and white
- (a) Chairman Joint Chiefs of Staff.
- (b) Secretary of Defense.
- (c) Deputy Secretary of Defense.
- (d) Director of Defense Research and Engineering.

Class 3 - Scarlet and white
- (a) Assistant Secretaries of Defense.
- (b) Secretary of the Army.
- (c) Under Secretary of the Army.
- (d) Chief of Staff.
- (e) Vice Chief of Staff.
- (f) General of the Army.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:34Z
Check the source to verify that this is the current version before use.

Class 4 - Old Glory blue and white.
(a) Vice President of the United States of America.
(b) Assistant Secretaries of the Army.
(c) Coast Guard Standard.
Class 5 - Ultramarine blue and Air Force yellow.
(a) Secretary of the Air Force.
(b) Under Secretary and Assistant Secretaries of the Air Force.
(c) Chief of Staff - Air Force.
(d) High Commissioner of the Ryukyu Islands.
Class 6 - Silver gray, black and golden yellow.
(a) United States Corps of Cadets.
Class 7 - Golden yellow.
(a) Secretary of the Navy.
(b) Under Secretary of the Navy.
(c) Assistant Secretaries of the Navy.
(d) NCO and Staff Officers.
Class 8 - Scarlet and golden yellow.
(a) Marine Corps Standard.

6.2 Ordering data.- Procurement documents should specify the following:
(a) Title, number, and date of this specification
(b) Class required (see 1.2)
(c) When a first article sample is not required (see 3.2)
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2)

6.3 Sample.- For access to samples, address the procuring office issuing the invitation for bids.

6.4 Color cable numbers.- The origin of the cable numbers included in this specification are as follows:
The 65000 series is from the U.S. Army Color Card for the Official Colors for Arms and Services; the 70000 series is from the 9th Edition of the Standard Color Card of America; and Cable No. 1120 is from the Spring Silk Card of 1924 (see 2.2).

Custodians:
Army - IH
Navy - SH
Air Force - 82


Review activities:
Air Force - 82, 85
Navy - SH
Other - DP


User activities:
Army - SM
Navy - MC

Preparing activity:
The Institute of Heraldry,
United States Army

Project Number 8345 - 0070

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:34Z
Check the source to verify that this is the current version before use.

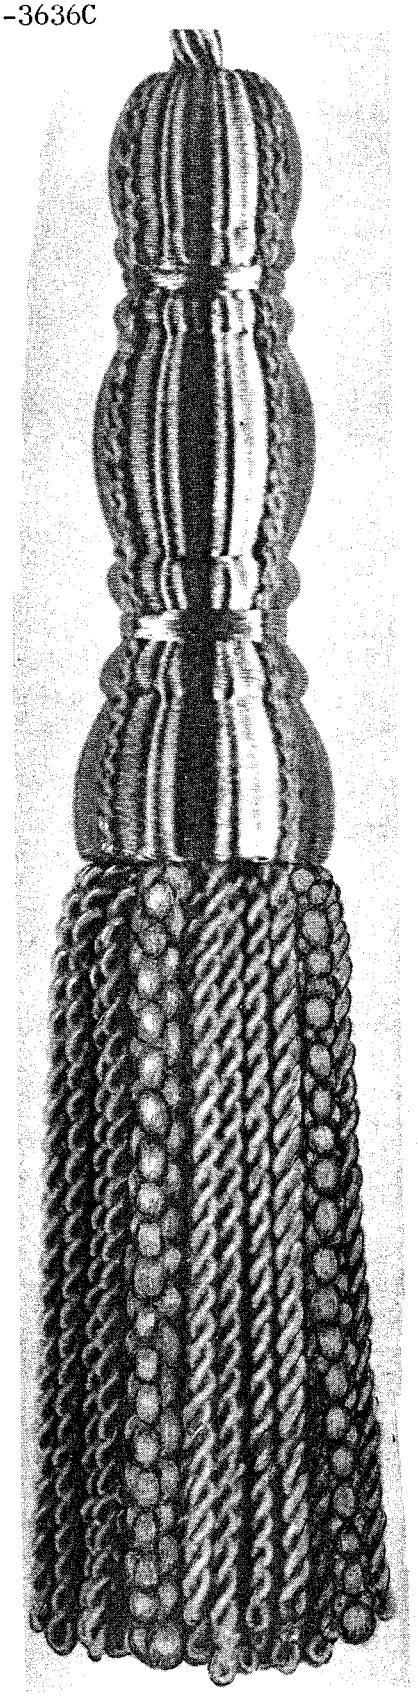

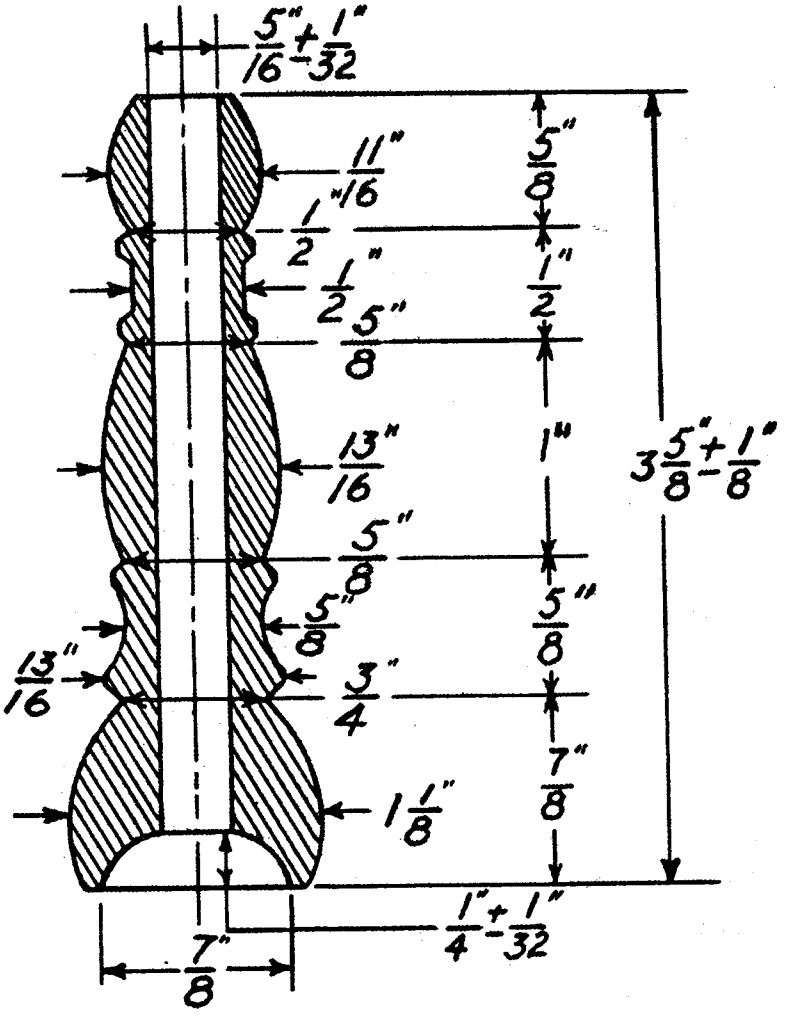

UNLESS OTEHRWISE SPECIFIED
TOLERANCES ARE ± 1/16

FIGURE 1

☆U.S. GOVERNMENT PRINTING OFFICE: 1970-393-094/S8236

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:34Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

MIL-C-3636C Cords and Tassels, Flag

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:34Z
Check the source to verify that this is the current version before use.