INCH-POUND

MIL-S-3649G(MC)
12 October 1989
SUPERSEDING
MIL-S-3649F(MC)
16 September 1983

MILITARY SPECIFICATION

SHIRT, MEN'S: LONG SLEEVE

This specification is approved for use by the U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for polyester/wool tropical shirts with long sleeves.

1.2 Classification. The shirt shall be of one type in the following classes and sizes as specified (see 6.2):

Class 1 - Shirt, Polyester/Wool, Plain Cuffs (Standard)
Class 2 - Shirt, Polyester/Wool, Plain Cuffs (Optional)
Class 3 - Shirt, Polyester/Wool, French Cuffs (Optional)

Schedule of Sizes

Neck Size (inches)	Sleeve length (inches)									
13	29	30	31	32	33	34				
13-1/2	29	30	31	32	33	34	35	36	37	
14	29	30	31	32	33	34	35	36	37	38
14-1/2	29	30	31	32	33	34	35	36	37	38
15	29	30	31	32	33	34	35	36	37	38
15-1/2	29	30	31	32	33	34	35	36	37	38
16	29	30	31	32	33	34	35	36	37	38
16-1/2		30	31	32	33	34	35	36	37	38
17				32	33	34	35	36	37	
17-1/2				32	33	34	35	36		
18					33	34	35	36		

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development and Acquisition Command, Washington, D.C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, and Button, Staple, (Plastic)
CCC-C-438	- Cloth, Cotton, Buckram
DDD-L-20	- Label, for Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-P-15011	- Pallet, Material Handling, Wood, Post Construction, 4 Way Entry
MIL-C-368	- Cloth, Satin, Rayon and Cloth, Twill, Rayon
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-21115	- Cloth, Tropical, Wool, Polyester/Wool
MIL-C-29404	- Cloth, Tropical, Polyester and Wool
MIL-T-43548	- Thread, Polyester, Cotton Covered and Rayon Covered
MIL-C-43594	- Cloth, Interlining, Polyester
MIL-P-55010	- Plastic Sheet, Polyethylene Terephthalate

STANDARDS

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipping and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-1492	- Provisions for Evaluating Quality of Men's Shirts

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center (Attn: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS

U.S. Postal Service Manual

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

Department of Defense (DoD) Standard Shades for Buttons 1966

Department of Defense (DoD) Standard Color Card of
Official Standardized shades for Sewing Threads 1968

(Application for copies should be addressed to the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016.)

2.2 Non-Government Publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of this document which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in DODISS are the issues of the documents cited in the solicitation (see 6.2).

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, ATTN: Order Section, 1616 P Street, N.W., Washington, D.C. 20026.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this document takes precedent. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard sample. Standard samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection (see 6.5) in accordance with 4.4.

3.3 Materials.

3.3.1 Basic material. The basic material for each class of shirt shall be as follows:

3.3.1.1 Class 1. Cloth, tropical, polyester and wool, khaki shade 2122 (see 6.3) conforming to MIL-C-29404.

3.3.1.2 Classes 2 and 3. The Cloth, tropical, polyester/wool, 10 ounce shrunk, khaki shade M-1 see 6.3), conforming to type III, class 3 of MIL-C-21115.

3.3.2 Lining, classes 2 and 3. The material for lining the collar stand shall be cloth, rayon, twill, 3.7 ounce, conforming to class 1 of MIL-C-368, khaki shade 2102 (see 6.3).

3.3.3 Interlining. The interlining for each class of shirt shall be as follows:

3.3.3.1 Class 1. The material for interlining the collar, collar stand, cuffs, left facing and flaps shall be polyester fiber cloth conforming to MIL-C-43594.

3.3.3.2 Classes 2 and 3. The material for interlining the collar, collar stand, cuffs, flaps and left facing shall be cloth, cotton, buckram, 4.5 ounce, conforming to type II, class 1 of CCC-C-438 and the shade shall be natural.

As an alternate to the interlining for classes 1, 2 and 3, a nonwoven fusible may be used. The fusible shall be 1.25 to 1.75 ounces per square yard, 80 to 85% polyester, 15 to 20% nylon with a thermal bonded polyester adhesive paste dot and the collar shall be white. The fusing conditions shall be as follows:

Temperature	280° - 290° F
	140° - 145° CE
Time	12 - 15 sec.
Pressure	4 to 6 PSI

The fusible interlining shall be Pellon S/8322 or equal to or better.

3.3.4 Thread. The thread shall be cotton covered for seaming and stitching the shirt and shall conform to MIL-T-43548 (see below).

Use	Ticket No.	Ply
General seaming and overedging	70	2 or 3
Button and buttonhole	40	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

3.3.4.1 Color and colorfastness. The thread shall be dyed khaki shade P-1, cable No. 66019. The dyed thread shall show good fastness to laundering, perspiration, and light when tested as specified in MIL-T-43548 (See DoD Standard Color Card of Official Standardized Shades for Sewing Threads).

3.3.5 Buttons. The buttons shall be melamine formaldehyde composition, glossy finish, conforming to Type II, Class D, style 24, 20 line of V-B-871. The color of the buttons shall be khaki shade AL, cable No. 62026. (See DoD Standard Shades for Buttons 1966.)

3.3.6 Collar stays. The collar stays shall be made from polyethylene terephthalate plastic sheet conforming to MIL-P-55010, except the thickness shall be 0.010 (±0.001) inch, the color shall be natural (clear or opaque), and the transparency and optical properties shall not apply. The stay shall measure not less than 1/4 inch or more than 3/8 inch wide and 2-1/4 to 2-5/16 inches long. Either both ends shall be rounded or one end rounded and one end cut at an angle with the point rounded.

3.3.7 Labels. Each shirt shall have an identification/instruction label and a size label conforming to DDD-L-20 as follows. The shirts are intended to be laundered or dry cleaned.

3.3.7.1 Identification/instruction label, cloth, printed. The identification/instruction label shall be type VI, class 15 and shall measure not less than 2-1/2 inches by 1-1/2 inches. The content and format of the identification information shall be as follows:

Nomenclature (item identification)
Contract Number
Name of Contractor
Wool Products Act Information
Do not starch, use bleach or
fabric softner
Dry clean or launder by hand
Caution: Bleach, fabric softner, starch
and/or hot water (excluding 100°F) will
harm the fabric of the shirt.

3.3.7.2 Identification/instruction marking. In lieu of the printed cloth label, the required identification/instruction information may be marked on the shirts by heat transfer (decalcomania), direct printing, or stamping. The markings shall conform to type III or type IV, class 1 of DDD-L-20.

3.3.7.3 Size label, cloth, printed. The size label shall be type VI, class 2 and shall measure not less than 1-1/4 inches by 1-1/2 inches. The size designation, consisting of the neck size and sleeve length (see 1.2), and stock number shall be indicated on the label as shown in the following sample:

$$\frac{14\text{-}32}{\text{Stock Number}}$$

The stock number may be omitted from the size label, but when omitted it shall be included in the identification label.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

3.3.7.4 Size marking. In lieu of the printed cloth label, the size designation and the stock number may be marked on the shirts by heat transfer (decalcomania), direct printing, or stamping. The markings shall conform to type III or type IV, class 2 of DDD-L-20.

3.4 Design. The shirts shall be the U.S. Marine Corps design shown on Figures 1, 2, 3 and 4, six button, semiformfitting at the waist, two patch-type breast pocket with flaps to button, two-piece back yoke, long sleeves with plain cuffs with sleeve binding for class 1, plain cuffs and placket to button class 2 and french cuffs and placket for class 3, turned down collar with "V" shaped opening and rayon lined collar stand for classes 2 and 3.

3.5 Patterns. Standard patterns will be furnished by the Government (see 6.3). The standard patterns shall not be altered in any way and shall be used for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns except that additional notches for use during construction are permitted on the working patterns. Also, minor modifications are permitted where necessary when using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in this specification. For class 1, the standard pattern provides 1/4-inch seam allowance for safety stitch construction; for class 2, the standard pattern provides 1/2-inch seam allowance for double-lapped and double-stitched seams. All other seam allowances are 1/4-inch except as otherwise specified in Table I. Standard patterns show size, seam allowance, directional lines for cutting and are marked or notched for proper placement and assembly of the component parts. Unless otherwise indicated in Table I, seams shall be in accordance with thes seam allowances.

3.5.1 Pattern parts. Shirts shall be cut from the specified materials in accordance with the pattern parts indicated below:

Item	Pattern Nomenclature	No of cut parts
	Material: Basic material	
1.	Back	1
2.	Yoke	2
3.	Fronts	2
4.	Sleeves	2
5.	Sleeve cuff (classes 1 & 2)	4
6.	Sleeve cuff (class 3)	4
7.	Collar	2
8.	Collar stand (class 1)	2
9.	Collar stand (classes 2 & 3)	1
10.	Collar stay holder	2
11.	Pockets	2
12.	Pocket flaps	4
13.	Sleeve plackets (classes 2 & 3)	2
14.	Sleeve binding (class 1)	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

Item	Pattern Nomenclature	No of cut parts
	Material: Interlining	
15.	Collar interlining	1
16.	Collar stand interlining	1
17.	Pocket flap interlining (class 1)	2
18.	Sleeve cuff interlining (classes 1 & 2)	2
19.	Front strip interlining	1
	Material: Cloth Rayon lining	
20.	Collar stand lining (classes 2 & 3)	1
	Markers	
21.	Pocket and buttonhole	
	Shapers	
22.	Finished pocket	
23.	Finished pocket flap	

3.6 Construction. The shirts shall be manufactured in accordance with the operation and stitch, seam and stitching types specified in Table I. The contractor is not required to follow the exact sequence of operations as listed in Table I. Stitch, seam, and stitching types shall conform to FED-STD-751. The stitches per inch specified in Table I shall be interpreted to be the minimum and the maximum permitted. Wherever two or more methods of seams or stitchings are given for the same operation, any one of them may be used. The looper (under thread) of stitch type 401 shall be on the inside of the shirt. Double rows of stitches shall be uniformly 1/4-inch gage. Seam allowances shall be maintained. Seams shall be sewn so that there will be not raw edges, runoffs, twists, pleats, or puckers. Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitching, shall be backtacked not less than 1/4-inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2-inch. When stitch type 401 is used, ends of seams and stitching shall be caught in other seams or stitching, and skipped stitches and thread may be repaired using stitch type 301 backstitched not less than 1/2-inch on each side of the skip or break.

3.6.1 Automatic equipment. Minor modifications are permitted where necessary using automatic equipment. These modifications shall not alter the dimensional, serviceability or appearance requirements cited in this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut the shirt in strict accordance with patterns furnished by the Government. b. Cut materials in the direction indicated by directional lines on the pattern. c. Cut all parts from one piece of basic material except the following which may be cut from ends: Bindings for raw edge of sleeve openings, under ply of collar, under ply plain cuffs, and under ply of pocket flaps. All parts cut from ends shall harmonize with the shade of the shirt. Binding for the raw edge of sleeve openings shall be 1-1/2 inches wide. d. Cut the buckram interlining for collar and collar stand on the straight (warp or filling direction) in accordance with the pattern. e. Cut the rayon lining for collar stand in accordance with the pattern. f. Cut stripping for left front interlining from polyester fiber (see 3.3.3) 2 inches wide. g. The use of drill holes is prohibited.					
2.	Replacement of damaged parts. a. Replace, at time of cutting, all parts containing damages such as holes or serious weakening defects such as smashes, multiple floats, and slubs likely to develop into a hole. b. Replace all parts damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissor or knife cuts, tears, holes, mends or burns.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
3.	Shade marking.					
	a. Mark or ticket all component parts, except those parts cut from ends (see 1.c.) in order to insure proper assembly and a uniform shade and size throughout the garment.					
	b. The use of tickets with metal fastening devices is prohibited on the rayon lining.					
4.	Make pockets.					
	Finished appearance. The hem of the pocket shall be uniformly stitched and shall finish smooth and flat. The breast pocket shall be uniform in shape and size in accordance with patterns.					
	a. The pocket shall be made of one ply of basic material.					
	b. Hem the top edge of pocket, in accordance with notches indicated by the pattern, with two rows of stitching 1/4-inch gage and with the outer row 1/6-inch from the folded edge.	301 or 401	EFa-2	12-16	70	70
	c. Turn under and crease the side and bottom edges of the pocket in an edge creasing machine.					
5.	Make pocket flaps.					
	Finished appearance. The pocket flaps shall be uniformly stitched with seams worked out to the edges. The flaps shall finish smooth and flat without twists, pleats, puckers or raw edges. The flaps shall be uniform in shape and size in accordance with the patterns. The buttonholes shall be securely tacked at each end.					
	a. The flaps shall be made of two plies of basic material and one ply of interlining.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
5.	Make pocket flaps. (cont'd)					
	b. Seam the respective plies together 1/4 inch from side and bottom edges. Trim the corners and points for proper turning.	301	SSe-2 (a)	12-16	70	70
	c. Turn flap, working the corners and points out completely and working the seams out to the edges. Edgestitch the flaps uniformly 1/8 inch from seamed edges. The seam shall finish at the edges of the flaps.	301	SSe-2 (b)	12-16	70	70
	d. Trim top edge of flaps evenly.					
	e. Make a vertical straight-type buttonhole, cut 9/16 inch long, through the center of each flap, securely tacking each end. The lower end of the buttonhole shall be 3/8 to 1/2 inch above the center point. The buttonhole shall have the purling on the outside of flap, and shall fit a 20-line button.	Buttonhole		55 per buttonhole including tack	40/6	40/6
6.	Make cuffs.					
	Finished appearance. The cuffs shall be uniformly stitched and shall finish smooth and flat without twists, puckers, or pleats. The cuffs shall be uniform in shape with rounded corners.					
	Classes 1 and 2					
	a. Fold the top edge of outer ply of cuff over the top edge of interlining 3/8 inch and single stitch 1/4 inch from folded edge, catching the interlining in the stitching.	301	EFa-1	12-16	70	70
	b. Seam the respective plies together along the bottom and side edges with a 1/4 inch seam.	301	SSe-2 (a)	12-16	70	70
	c. Turn and edgestitch 1/8 inch from folded edge. The edge stitching shall finish 1/2 inch from top	301	SSe-2 (b)	12-16	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6.	Make cuffs. (con't)					
	edge of finished cuff. The edge-stitching may taper to edge of cuffs at ends of stitching and is not required to be backstitched.					
	Class 3					
	d. Position top and bottom ply of cuffs with all edges even and seam together 1/4 inch from side and bottom edges. Trim corners for better turning.	301	SSe-2 (a)	12-16	70	70
	e. Turn cuffs, working out the seamed edges and rounded corners completely and edge stitch 1/8 inch from seamed edges.	301	SSe-2 (b)	12-16	70	70
7.	Make collar and collar stand.					
	Finished appearance. The collar shall be uniformly stitched and shall finish smooth and flat without twists, puckers, pleats, or other distortions. The points shall be worked out completely and shall be uniform in length. The seam shall be worked to the edge of the collar. The hem of the collar stand shall be uniformly stitched and shall finish smooth and flat.					
	a. The collar shall consist of two plies of basic material, a single ply of interlining and two collar stay holder pieces with collar stays attached.					
	b. Sew collar stays to stay holder pieces in accordance with marks on pattern. As an alternate method, collar stays may be spot laminated, not less than 2/3 of stay length, to collar stay holder pieces, ensuring the collar stay is properly positioned according to marks on pattern. Note: Collar stays must be placed in the position designated on pattern part to accommodate the required insignia of grade position.	301	SSa-1	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7.	Make collar and collar stand (cont'd)					
	c. Properly position the undercollar, interlining, stay holder piece assembly and topcollar together and seam with a 1/4 inch seam from top and side edges. The stay holder piece assembly shall be between the undercollar and the interlining on the finished collar.	301	SSe-2 (a)	12-16	70	70
	d. Trim the points and turn collar on a heated collar point turning and pressing machine, working the points out completely and working the seams to the edges.					
	e. Edgestitch the collar uniformly 1/8 inch from seamed edge.	301	SSe-2 (b)	12-16	70	70
	f. Trim the collar even at the lower edge.					
	Class 1					
	g. Stitch interlining to topcollar stand 1/8 inch around edges.	201 or 301	SSa-1	10-14	70	70
	h. Position collar between the top and undercollar stand as indicated by notches. Stitch 1/4 inch from the raw edge from end to end along top edge of collar stand.	301	SSq-2 (a)	12-16	70	70
	i. Turn top and undercollar stand to finished position and topstitch 1/16 inch from folded edge. The stitching may continue around the end of the collar stand.	301	SSq-2	12-16	70	70
	Classes 2 and 3					
	1. Position interlining and outer ply of collar stand with notches matching. Quilt the two plies together from end-to-end with four horizontal rows of stitching, evenly distributing the fullness of the interlining between the rows of stitching. The top and bottom row	301	OSa-4	12-16	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
7.	Make collar and collar stand (cont'd)					
	of quilting stitches shall be made 1/2 to 5/8 inch from top and bottom raw edges of stand respectively, and the remaining two rows shall be evenly spaced between the top and bottom rows.					
8.	Join collar stand and lining to collar (Classes 2 & 3)					
	Finished appearance. The collar stand and lining shall be joined to the collar without pleats, twists, puckers, or other distortions. The ends of the collar stand shall be rounded and well formed.					
	a. Position the collar stand interlining assembly on the outside of undercollar, and the collar stand lining on outside of top-collar, with notches matching, and seam all plies together 1/4 inch from lower edges; continue the stitching to the ends of the collar stand, seaming together the collar stand and lining.	301	SSa-1	12-16	70	70
	b. Turn down collar stand pieces and stitch 1/16 inch from raised edge.	301	SSq-2 (raised edge shows finished seam)	12-16	70	70
9.	Bind sleeve opening					
	Class 1					
	a. Turn raw edges of binding to the inside, insert the edges of sleeve opening and stitch 1/16 to 1/8 inch from the folded edge. The binding shall finish 1/2 inch wide.	301	BSc-1	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

...DE — PHOTOGRAPHIC REPRODUCTION

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9.	Bind sleeve opening (cont'd)					
	b. Turn binding to inside of sleeve and stitch or bartack through binding and sleeve 1/8 to 1/4 inch below top of opening, the full width of the binding.	301		10-14	70	70
		or		28 per	70	70
		Bar-tack		bar-tack		
		or		28 per	70	70
		301		tack		
	or					
	c. Turn binding to inside of sleeve and stitch or bartack diagonally through binding only. An automatic straight tack may be used.	301		10-14	70	70
		or		28 per	70	70
		Bar-tack		bar-tack		
		or		28 per	70	70
		301		tack		
	Classes 2 and 3					
	d. The binding shall be seamed to the back edge of the sleeve opening without twists, pleats, puckers, or raw edges, and shall finish smooth, flat, and uniform in appearance. The bindings shall finish 1/2 inch wide.					
	e. Bind the raw edge of the sleeve at the back opening with the 1-1/2-inch-wide strip of the basic material, with the raw edge of the binding turned under and caught in the stitching 1/16 inch from the inner folded edge.	301	BSc-1	12-16	70	70
10	Seam placket to sleeve (classes 2 and 3).					
	Finished appearance. The placket shall be seamed to the front edge of the sleeve opening without twists, pleats, or puckers, and shall finish smooth, flat, and uniform in appearance. The placket shall finish 1-1/4 + 1/8 inches wide on the outside.					
	a. Turn under and crease the side edges and upper end of placket pieces on a placket folding and pressing machine, forming a point at the upper end.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
10.	Seam placket to sleeve (classes 2 and 3). (cont'd)					
	b. Position the placket piece on the inside of the sleeve at the front edge of the opening with raw edges even and seam 1/4 inch from the raw edge. The stitching shall extend from bottom to top end of opening.	301	LSq-2 (a)	12-16	70	70
	c. Turn the placket at the seam and top stitch the placket 1/16 inch from the raised edge.	301	LSq-2 (b)	12-16	70	70
	d. Tack the placket, the binding, and the tongue notch together at top end of sleeve opening.	301	SSa-1	12-16	70	70
	e. Turn the placket to the outside of the back folded edge and stitch the placket to the body of the sleeve 1/16 inch from the folded front and slanted top edges, and continue stitching along the back edge from a distance of 1-1/2 ± 1/8 inches from the point, lapping the placket on the bound edge of the sleeve opening.	301	LSd-1	12-16	70	70
	f. Stitch and backstitch across the width of the placket from the end of the stitching at the back edge to the row of stitching at the front edge. The stitching shall be through the placket and bound edge of the sleeve opening.	301	SSa-1	12-16	70	70
11.	Join yoke to back.					
	Finished appearance. The yoke shall be seamed to the back without pleats, puckers, twists, raw edges, or other distortions, and shall be uniform in appearance and placement.					
	Class 1					
	a. Position the top edge of back between the two lower plies of yoke, with edges even and stitch	301	SSa-1	12-16	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
11	Join yoke to back. (cont'd)					
	together with a 1/4-inch seam. Safety stitch shall not be permitted for this operation. Turn the top ply of yoke and topstitch 1/16 inch from the turned edge. (Do not catch the underply of yoke in the topstitching).					
	Classes 2 & 3					
	b. Position the top edge of back between the two lower plies of yoke, with edges even and stitch together with a 1/2-inch seam. The yoke shall be topstitched with 1/4-inch gage. The outer row of stitching shall be 1/16 inch from the folded edge.	301	SS1-3 (a) and SSq-3 (b)	12-16	70	70
12	Make fronts.					
	a. Cut left front interlining to required length, from top to bottom of shirt.					
	b. Turn in raw edge of left front 3/16 to 1/4 inch and with outer edge of interlining turned in, stitch front to interlining with two rows of stitching 1-1/4 to 1-3/8 inches apart. The facing shall finish 1-1/2 to 1-3/4 inches wide.	301 or 401	LSk-2	10-14	70	70
	c. Turn in raw edge of right front 7/8 inch and fold to inside of shirt to form a 1 + 1/16 inch facing from folded edge to folded edge. Topstitch 1/16 inch from each folded edge.	301 or 401	EFt-2 (inverted)	12-16	70	70
13	Make button stand and buttonhole plait (classes 2 and 3).					
	Finished appearance. The button stand and buttonhole plait shall be uniformly stitched and shall finish smooth and flat without pleats, puckers, twists, or other distortions.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
13	Make button stand and buttonhole plait (classes 2 and 3). (cont'd)					
	a. Form the button stand by folding the right front edge 2 ± 1/8 inches to the outside, turning under the raw edge 3/4 inch and stitching 1/16 inch from the inner folded edge. The button stand shall finish 1-1/4 ± 1/8 inches wide.	301 or 401	EFt-2	12-16	70	70
	b. Form the buttonhole plait by folding the left front edge to the outside 1-7/8 ± 1/8 inches, turning under the raw edge 5/16 to 3/8 inch and stitching 3/16 inch from each folded edge. The buttonhole plait shall finish 1-1/2 ± 1/8 inches wide.	301 or 401	EFt-2	12-16	70	70
14	Sew on label.					
	Finished appearance. When cloth identification/instruction label is used, it shall be positioned so that in finished shirt the label shall be midway between the folded front edge of shirt and back edge of facing. The bottom edge of label shall be toward the back edge of facing, and the lower end of label shall be approximately 3 inches from finished bottom edge of shirt and parallel to the facing.					
	a. Position the identification/ instruction label lengthwise on outside of left facing and stitch label 1/8 inch from each edge (see oper 24).	301	LSbj-1	8-12	70	70
15	Set pockets and pocket flaps.					
	Finished appearance. The pockets and pocket flaps shall be uniform in appearance and placement and shall lie smooth and flat without pleats, puckers, twists, or raw edges. The pockets and pocket flaps shall be parallel to the front edge of shirt when buttoned.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
15.	Set pockets and pocket flaps. (cont'd)					
	The pocket and flap, on left and right sides, respectively, shall be in alignment with each other. The pockets and flaps shall conform to the measurements shown in Table III.					
	a. Mark fronts for position of pockets and pocket flaps, as indicated by patterns.					
	b. Position the raw edge of pocket flaps in line with the mark on the front. Seam pocket flaps to the fronts 1/8 inch from raw edge.	301	LSb1-2 (a)	12-16	70	70
	c. Turn down the flaps at seam and top stitch 1/4 inch from raised edge.	301	LSb1-2 (b)	12-16	70	70
	d. Position pockets at the marks on front. Seam pocket to fronts uniformly 1/16 inch from side and bottom turned edges, securely tacking the top corners.	301	LSd-1	12-16	70	70
16.	Seam shoulders.					
	Finished appearance. The shoulder seam shall be uniformly stitched and shall finish evenly without pleats, puckers, twists, or raw edges. The back shall be lapped on the fronts.					
	Class 1					
	a. Position the respective fronts between the yoke pieces and stitch together with a 1/4-inch seam. Turn and topstitch front yoke 1/16 inch from the folded edge.	301	SSq-3 (a) and SSq-3 (b)	12-16	70	70
	-or-					
	This operation may be performed using a double folder for top and bottom ply of yoke.	301	LSe-1	12-16	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
16.	Seam shoulders. (cont'd)					
	Classes 2 and 3					
	b. Join the yoke and front together at the shoulders with a double-lapped and double-stitched seam, 1/4-inch gage, with the outer row 1/16 inch from the folded edge.	301 or 401	LSc-2	12-16	70	70
17.	Set collar with size label.					
	Finished appearance. The collar shall be uniformly stitched to the shirt without pleats, puckers, twists, or raw edges. On the finished shirt, the ends of collar shall be 3-3/8 ± 1/8 inches long when collar is turned up and measured from juncture point of collar and collar stand to collar point. The seam joining collar to body of shirt shall not be visible below the finished edge of collar when collar is properly folded and pressed at the breakline. The cloth size label, when used, shall be properly positioned and caught in seam joining collar stand lining to shirt.					
	a. Seam collar stand to neck of shirt on the outside, catching the interlining in the stitching.	301	SSa-1	12-16	70	70
	b. Turn in the bottom edge of the collar stand and single stitch through stand and shirt, catching top edge of label. Continue stitching around ends of stand with the stitching superimposed on raised stitching of collar stand (Oper 8b).	301 and 301	LSd-1 SSe-2 (b)	12-16 12-16	70 70	70 70
18.	Set sleeves.					
	Finished appearance. The sleeve shall be properly set and uniformly stitched without pleats, puckers, twists, or raw edges.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
18.	Set sleeves. (cont'd)					
	a. Trim yoke even with back part at armhole if necessary.	515 or 516 or 517 or 518 or 519	SSa-2	10-14	70	70
	Class 1					
	b. Set sleeves by overedging and seaming the raw edges together in one operation.	301 or	LSc-2	12-16	70	70
		401	LSc-2	12-16	70	70
	Classes 2 and 3					
	c. Join sleeves to shirt around the armhole with a double-lapped and double-stitched seam, 1/4-inch gage, with the outer row 1/16 inch from folded edge. The fronts, yoke and back shall be lapped on the sleeve.					
19.	Close sides and sleeves.					
	Finished appearance. The sleeve and side seams shall be uniformly stitched without pleats, puckers, twists or raw edges. The seams shall start and finish evenly. The ends of armhole seams shall not be staggered more than 3/8 inch. The back may be lapped on the fronts or the fronts on the back, but not on both.					
	Class 1					
	a. Join side and underarm seams by overedging and seaming the raw edges together in one operation.	515 or 516 or 517 or 518	SSa-2	10-14	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
19.	Close sides and sleeves. (cont'd)					
	Classes 2 and 3					
	b. Join fronts and back part at the sides and close the sleeve underarm with a double-stitched seam staggering the ends of the armhole seam. The double row of stitching shall be 1/4-inch gage with the outer row 1/16 inch from the folded edge.	301 or 401	LSc-2	12-16	70	70
20.	Hem bottom of shirts.					
	Finished appearance. The sleeve hems shall be uniformly stitched without twists, puckers, pleats, or other distortions, and shall finish 3/16 to 1/4 inch wide.					
	a. Turn bottom of fronts and back of shirt with the raw edge turned in and single stitched through the shirt 1/16 inch from the upper folded edge, forming the hem.	301	EFb-1	12-16	70	70
21.	Join cuffs to sleeve.					
	Finished appearance. On the finished shirts, the plain cuff (classes 1 and 2) shall be 2-1/2 to 2-5/8 inches wide and the french cuff (class 3) shall be 5 ± 1/8 inches wide.					
	Classes 1 and 2					
	a. Position the cuff on the lower inside end of sleeve with raw edges even. Join underply of cuff and end of sleeve together with a 1/4-inch seam.	301	LSq-2 (a)	12-16	70	70
	b. Turn cuff to the outside with the hemmed edge lapped on the outside of the sleeve. Stitch the top-ply to the sleeve 1/16 inch from the finished top edge.	301	LSb-1	12-16	70	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
21.	Join cuffs to sleeve. (cont'd)					
	Class 3					
	c. Position the cuff on the lower inside end of sleeve with raw edges even. Join the underply of cuff and end of sleeve together with a 3/8 inch seam, turning the bound edge of sleeve opening flat against the inside of the sleeve and catching the end in stitching.	301	LSq-2 (a)	12-16	70	70
	d. Raise the cuff and topstitched underply 1/16 inch from the raised seam.	301	LSb-1	12-16	70	70
	e. Turn the cuff to the outside, lapping the top ply on the outside of the sleeve. Stitch the top-ply to the sleeve with the upper edge turned under and caught in the stitching 1/16 inch from the upper folded edge.	301	LSb-1	12-16	70	70
	f. Edgestitch the cuffs 3/16 inch from side and bottom seamed edges.	301	SSe-2 (b) (shows finished seam)	12-16	70	70
22.	Make buttonholes.					
	Finished appearance. The buttonholes shall be clean cut, well made and correctly positioned. The buttonholes shall be straight type, cut 5/8 inch long, and shall fit a 20-line sewing hole button. The purling shall be on the outside of the shirt.					
	Class 1					
	a. The location for the front buttonholes shall be 3/4 ± 1/16 inch from the front edge and equally spaced 3-3/4 ± 1/4 inches from center to center. The front end of collar stand buttonhole shall ex-					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
22.	Make buttonholes. (cont'd)					
	tend 1/8 inch ahead of line of front buttonholes. The buttonhole on the cuff shall be centered between top and bottom edges of cuff with end of buttonhole 3/8 to 1/2 inch from end of cuff.					
	b. Make a vertical straight-type buttonhole at each mark on the front, securely tacking each end of buttonhole.	Buttonhole or 101 (zigzag)	55 per buttonhole including tack	40/6	40/6	
	c. Make a horizontal buttonhole at the mark on the collarstand with the front edge of buttonhole extending 1/8 inch beyond the line of vertical front buttonholes, securely tacking each end of buttonhole.	Buttonhole or 101 (zigzag)	55 per buttonhole including tack	40/6	40/6	
	d. Make a horizontal buttonhole at the mark on each cuff, securely tacking each end of buttonhole.	Buttonhole or 101 (zigzag)	55 per buttonhole including tack	40/6	40/6	
	Classes 2 and 3					
	e. The front buttonholes shall be midway between folded edges of the buttonhole plait and equally spaced 3-3.4 ± 1/4 inches from center to center. The front end of collar stand buttonhole shall extend 1/8 inch ahead of line of center plait buttonholes. The class 2 shirt cuff buttonholes shall be midway between top and bottom edges of cuff with back end of buttonhole 3/8 to 1/2 inch from end of cuff. The class 3 shirt cuff buttonholes shall be spaced 3/4 ± 1/8 inches apart with the bottom buttonhole 1-3/8 to 1-1/2 inches above the bottom folded edge of cuff and the outer end of buttonholes 3/8 to 1/2					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
22.	Make buttonholes. (cont'd)					
	inch from end of cuff at opening. The buttonhole for the sleeve placket shall be centered between the folded edges of placket and midway between top edge of cuff and horizontal stitching at upper end of placket.					
	f. Make a vertical straight-type buttonhole at each mark on the buttonhole plait, collar stand, cuffs and sleeve placket, securely tacking each end of buttonhole.	Buttonhole or 101 (zigzag)	55 per buttonhole including tack	40/6	40/6	
23.	Sew on buttons.					
	Finished appearance. The buttons shall be securely sewn and shall properly engage buttonholes in buttonhole plait, collar stand, sleeve placket and cuffs (classes 1 and 2 only) and pocket flaps.					
	a. Sew five 20-line sewing hole buttons to the buttonstand through the right front, with center of buttons 5/8 to 3/4 inch from front edge of buttonstand.	101		21-24 per button	40/6	
		or				
		301		16-18 per button	40/6	40/6
	b. Sew one 20-line sewing hole button to the right end of the collar stand, with the center of the button aligned with center of front buttons.	101		21-24 per button	40/6	
		or				
		301		16-18 per button	40/6	40/6
	c. Sew one 20-line sewing hole button to the bound edge of each sleeve placket (classes 2 and 3).	101		21-24 per button	40/6	
		or				
		301		16-18 per button	40/6	40/6

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO.	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
23.	Sew on buttons. (cont'd)					
	d. Sew one 20-line sewing hole button to the back end of each cuff (classes 1 and 2).	101		21-24 per button	40/6	40/
		or				40/
		301		16-18 per button	40/6	
		101			40/6	
	e. Sew one 20-line sewing hole button to each pocket through the hem.	or 301		21-24 per button	40/6	
				16-18 per button		
24.	Identification and size markings.					
	a. When marking is used in lieu of cloth identification or size labels, the identification marking shall be applied to the shirt at the location specified for the cloth label (see 14.a) and the size shall be marked on the collar stand lining at the center back.					
25.	Cleaning.					
	a. Trim all ends of stitching and remove the loose ends from the shirt.					
	b. Remove without injury to the material all spots, stains, shade tickets or markings.					
26.	Pressing.					
	Finished appearance. The entire shirt shall be well pressed. Pressing shall be accomplished with a heated pressing iron or pressing machine of a type suitable to obtain the desired appearance in accordance with good manufacturing practice. Use of a steam-inflated bag-type machine is prohibited.					
	a. Press collar on a collar machine, creasing on the breakline and shaping to obtain the proper contour while pressing.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
26.	Pressing. (cont'd) b. Press buttonhole plait and buttonstand smooth and flat. c. Press entire shirt (fronts, back, sleeves, pocket flaps, and pockets). Button the fronts, pocket flaps, sleeve plackets and cuffs.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished shirts shall conform to the measurements shown in Tables II and III.

Table II. Shirt measurements

Neck Size	Collar length inches 1/	Breast inches 2/	Back length inches 3/	Sleeve length inches 4/
13	13-1/2	36	30-3/4	see 1.2
13-1/2	14	37	30-3/4	see 1.2
14	14-1/2	39	30-3/4	see 1.2
14-1/2	15	41	30-3/4	see 1.2
15	15-1/2	43	31-1/4	see 1.2
15-1/2	16	45	31-1/4	see 1.2
16	16-1/2	47	31-1/4	see 1.2
16-1/2	17	49	31-1/4	see 1.2
17	17-1/2	51	31-3/4	see 1.2
17-1/2	18	53	31-3/4	see 1.2
18	18-1/2	55	31-3/4	see 1.2
Tolerances:	+1/4 -1/8	±1/2	±1/2	+1/4 -1/2

1/ Collar length measurement taken from front cut end to center of button.

2/ Twice the breast measurement taken from folded edge to folded edge in line with pit of armhole with shirt buttoned.

3/ Back length measurement taken at center back from lower edge of undercollar to bottom edge of shirt.

4/ Sleeve length measurement taken, with sleeve extended, from center back at lower edge of undercollar to lower edge of cuff; except on class 3 shirt, the cuff shall be folded with the buttonholes matching and the measurement taken to the lower folded edge.

Table III. Pocket and flap measurement 1/

Neck Size	13 to 14-1/2 (inclusive) inches	15 to 18 (inclusive) inches
Pockets		
Width, side edge to side edge	4-1/2	5-1/8
Length, top edge to bottom edge	5-3/4	6
Flaps		
Width, at top edge	4-3/4	5-3/8
Length, at sides	1-5/8	1-7/8
Length, at center	2-1/2	2-7/8
Overall length of pocket and flaps	6-1/4	6-1/2

1/ Tolerance: ± 1/8 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

3.8 Workmanship. The finished shirt shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable point value of defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such conform to the prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Certificate of compliance. Where certificates of compliance is submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105, except where otherwise indicated in MIL-STD-1492.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated shirt for all provisions of this specification. The contracting officer should specify the type of first article and the number of units to be tested.

4.5 Quality conformance inspection.

4.5.1 Testing of components. Testing of components shall be in accordance with the applicable subsidiary specification and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing will be as specified in FED-STD-191, wherever applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

4.5.1 In-process inspection. Inspection will be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are performed as specified. The Government reserves the right to exclude from consideration for acceptance any material or services for which in-process inspection has indicated nonconformance.

4.5.2 Sampling for testing. Testing shall be in accordance with sampling provisions tables cited in MIL-STD-1492.

4.5.3 Examination of the end item. As a final step in the contractor's production control plan before formation of a lot, each shirt shall be buttoned and examined on an inspection table. A shirt containing a selected defect shall not be included in the end item lot. Selected defects are those defects listed in MIL-STD-1492 indicated by an asterisk (*). The end item examination provisions for the finished shirt shall be as specified for Dress ("D") shirts in MIL-STD-1492.

4.5.4 Dimensional examination. The dimensional examination provisions for the finished shirts shall be as listed in 3.7 and as specified in MIL-STD-1492.

4.5.5 Examination of packaging. The examination for compliance with packaging, packing, and marking requirements shall be as specified in MIL-STD-1492.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each fully-buttoned shirt be folded in accordance with standard practice to approximate dimensions of 14 by 10-1/2 inches. The folded shirt shall be secured with noncorrosive pins or clips, and placed in a polyethylene bag approximately 14-1/2 inches long by 11 inches wide, with a 1 inch lip along the open 11-inch dimension. The polyethylene flexible film shall be 0.0015 inch thick. The final closure of the bag shall be heat-sealed with the heat seal made as close as possible to the open end. A 1/4-inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the bag may be accomplished by means of a tuck or reverse flap. Each bag shall contain a label (see 5.3.1).

5.1.2 Commercial. Shirts shall be packaged to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The packaging and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

5.2.1.1 Method 1. Sixty (60) shirts of one class and size shall be packed in a fiberboard shipping container with liner, conforming to class-weather resistant, size No. 3A of MIL-B-17757. Each shipping container shall be assembled, closed, and reinforced as specified in the appendix thereto.

5.2.1.2 Method 2. When specified (see 6.2), three level B shipping containers, 180 shirts of one class and size only, shall be overpacked in a fiberboard shipping container conforming to class-weather resistant, size No. 4 of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto.

5.2.2 Level B. Sixty (60) shirts of one class and size only shall be packed in a fiberboard shipping container with liner, conforming to class domestic, size No. 3A of MIL-B-17757. The fiberboard used in fabricating the box shall be grade 275. Each shipping container shall be assembled, closed, and reinforced as specified in the appendix thereto.

5.2.3 Commercial. Shirts, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification and U. S. Postal Service Manual or regulations of other carriers applicable to the mode of transportation.

5.3 Palletization. When specified (see 6.2), slacks packed as specified in 5.2 shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K and L or O and P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, Type I, Class 1, Style 1, Size A, Wood Group I, II, III, or IV of MIL-P-15011, or, 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, Wood Group I, II, III or IV, Grade A of NN-P-71. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking. In addition to any special marking required by the contract or order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the following information legibly printed or stamped in black, bold letters 1/4 inch in height directly on the bag across the center face, or on a white paper label inserted within the bag, so as to permit ready identification.

Nomenclature _____
Stock Number _____
Size _____
Contract Number _____
Name of contractor _____

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The shirts are intended for wear by male personnel of the U.S. Marine Corps.

6.2 Acquisition requirements. Acquisition documents must specify the following:

(a) Title, number and date of this specification.

(b) Class and size required (see 1.2).

(c) Whether first article is required (see 3.2).

(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

(e) When level A, method 2, packing is required (see 5.2.1.2).

(f) When palletization is required.

6.3 Standard samples, shade samples, and patterns. For information regarding the availability of samples of the shirt, standard shades, and patterns specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 Figures. Figures are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall control. Figure 2 shows finished collar although the collars shall be furnished unfinished.

6.5 First article. When a first article is required, is shall be inspected and approved under the appropriate provisions of FR 52.209 and the requirements of this specification. The sample(s) presented for inspection may be first article, preproduction samples, first production or sample(s) taken from the first lot depending on the contractors history and will be as directed by the Contracting Officer. The Contracting Officer shall include specific instructions in all acquisition instruments regarding arrangements for selection inspection, and approval of the first article.

6.6 Subject term (keyword) listing.

Man's
Polyester/Wool
Shirt

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

Preparing Activity
Navy - MC
Project No. 8405-N117

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

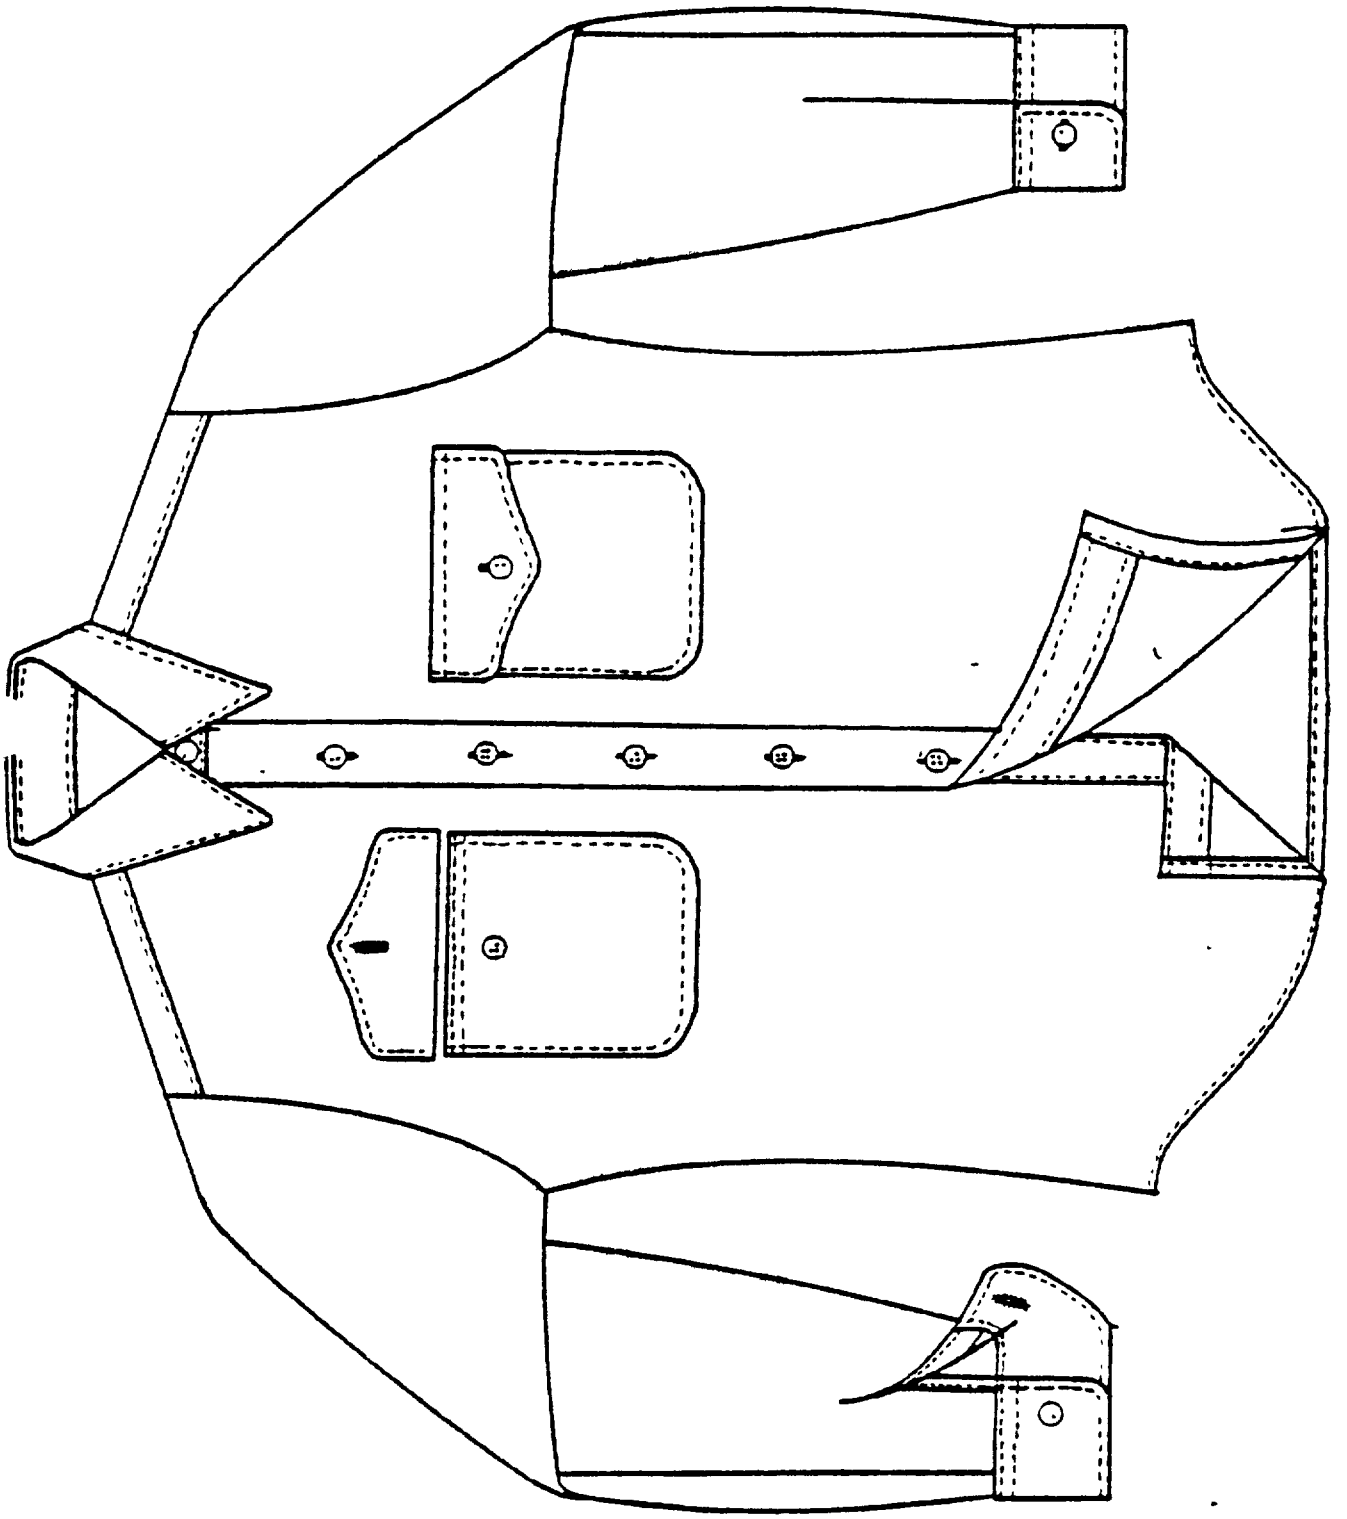


Fig. 1 Shirt, Men's: Long Sleeve–Class 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

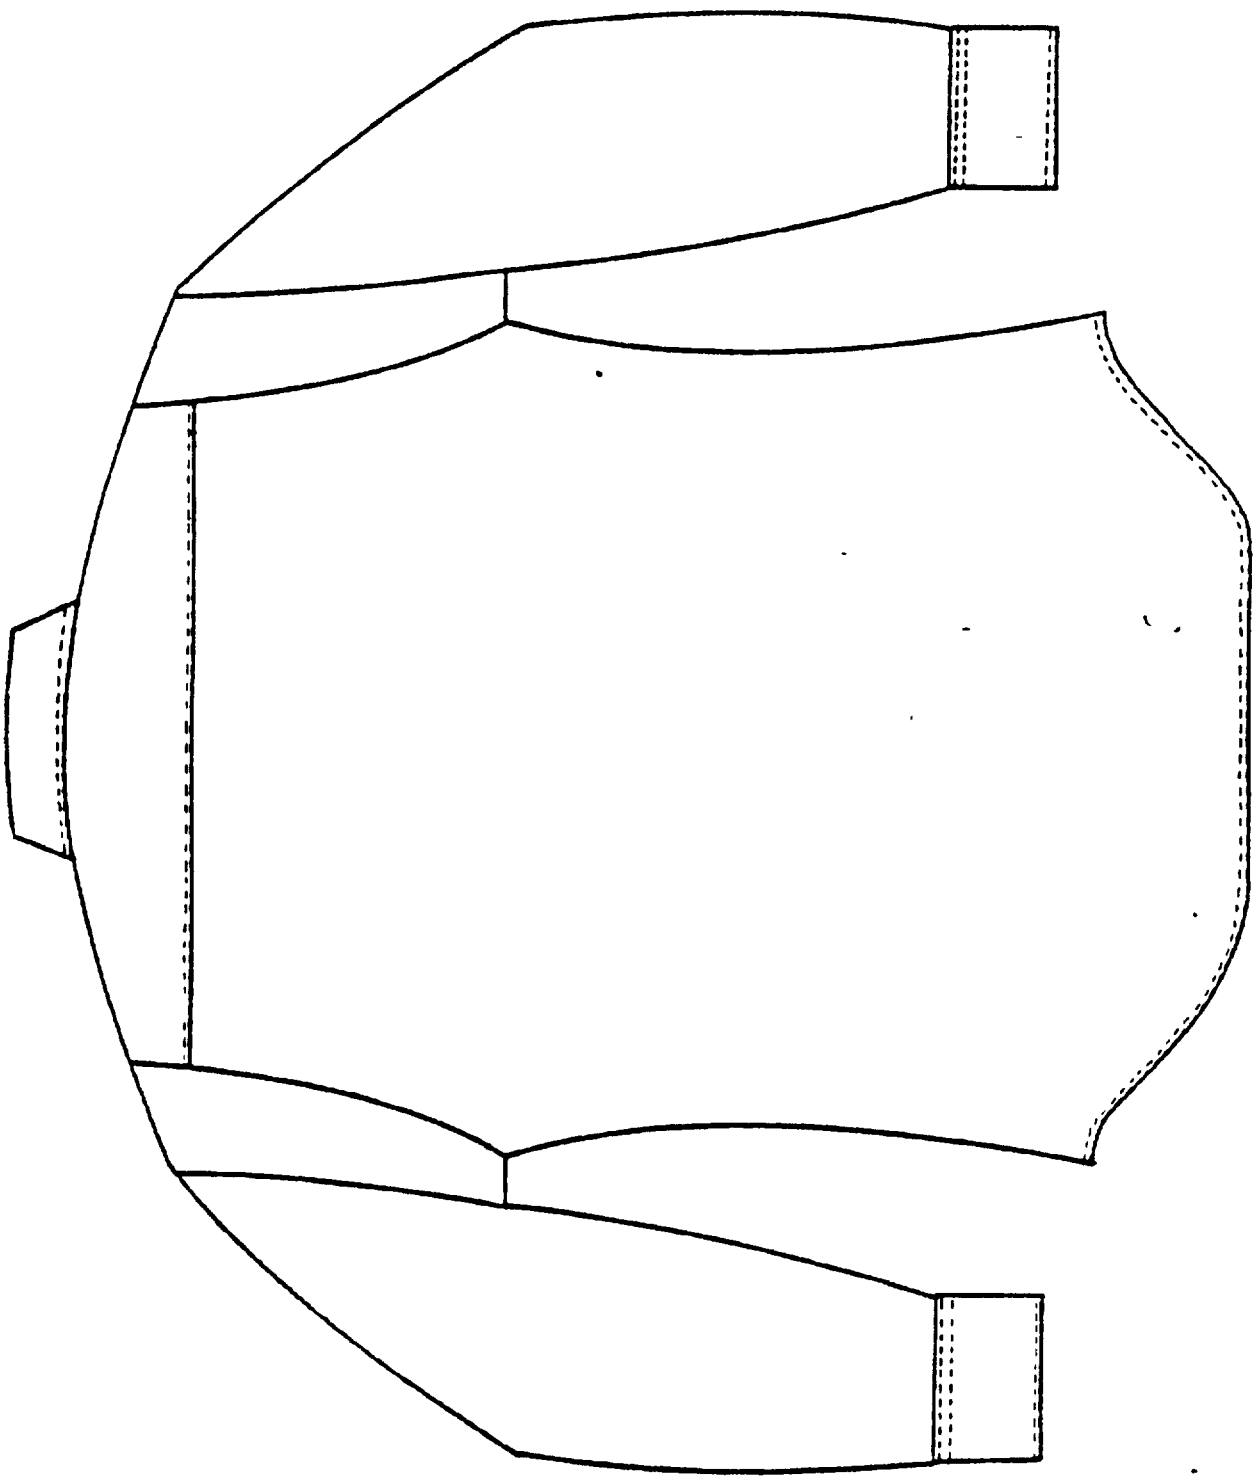


Fig. 2 Shirt, Men's: Long Sleeve-Class 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

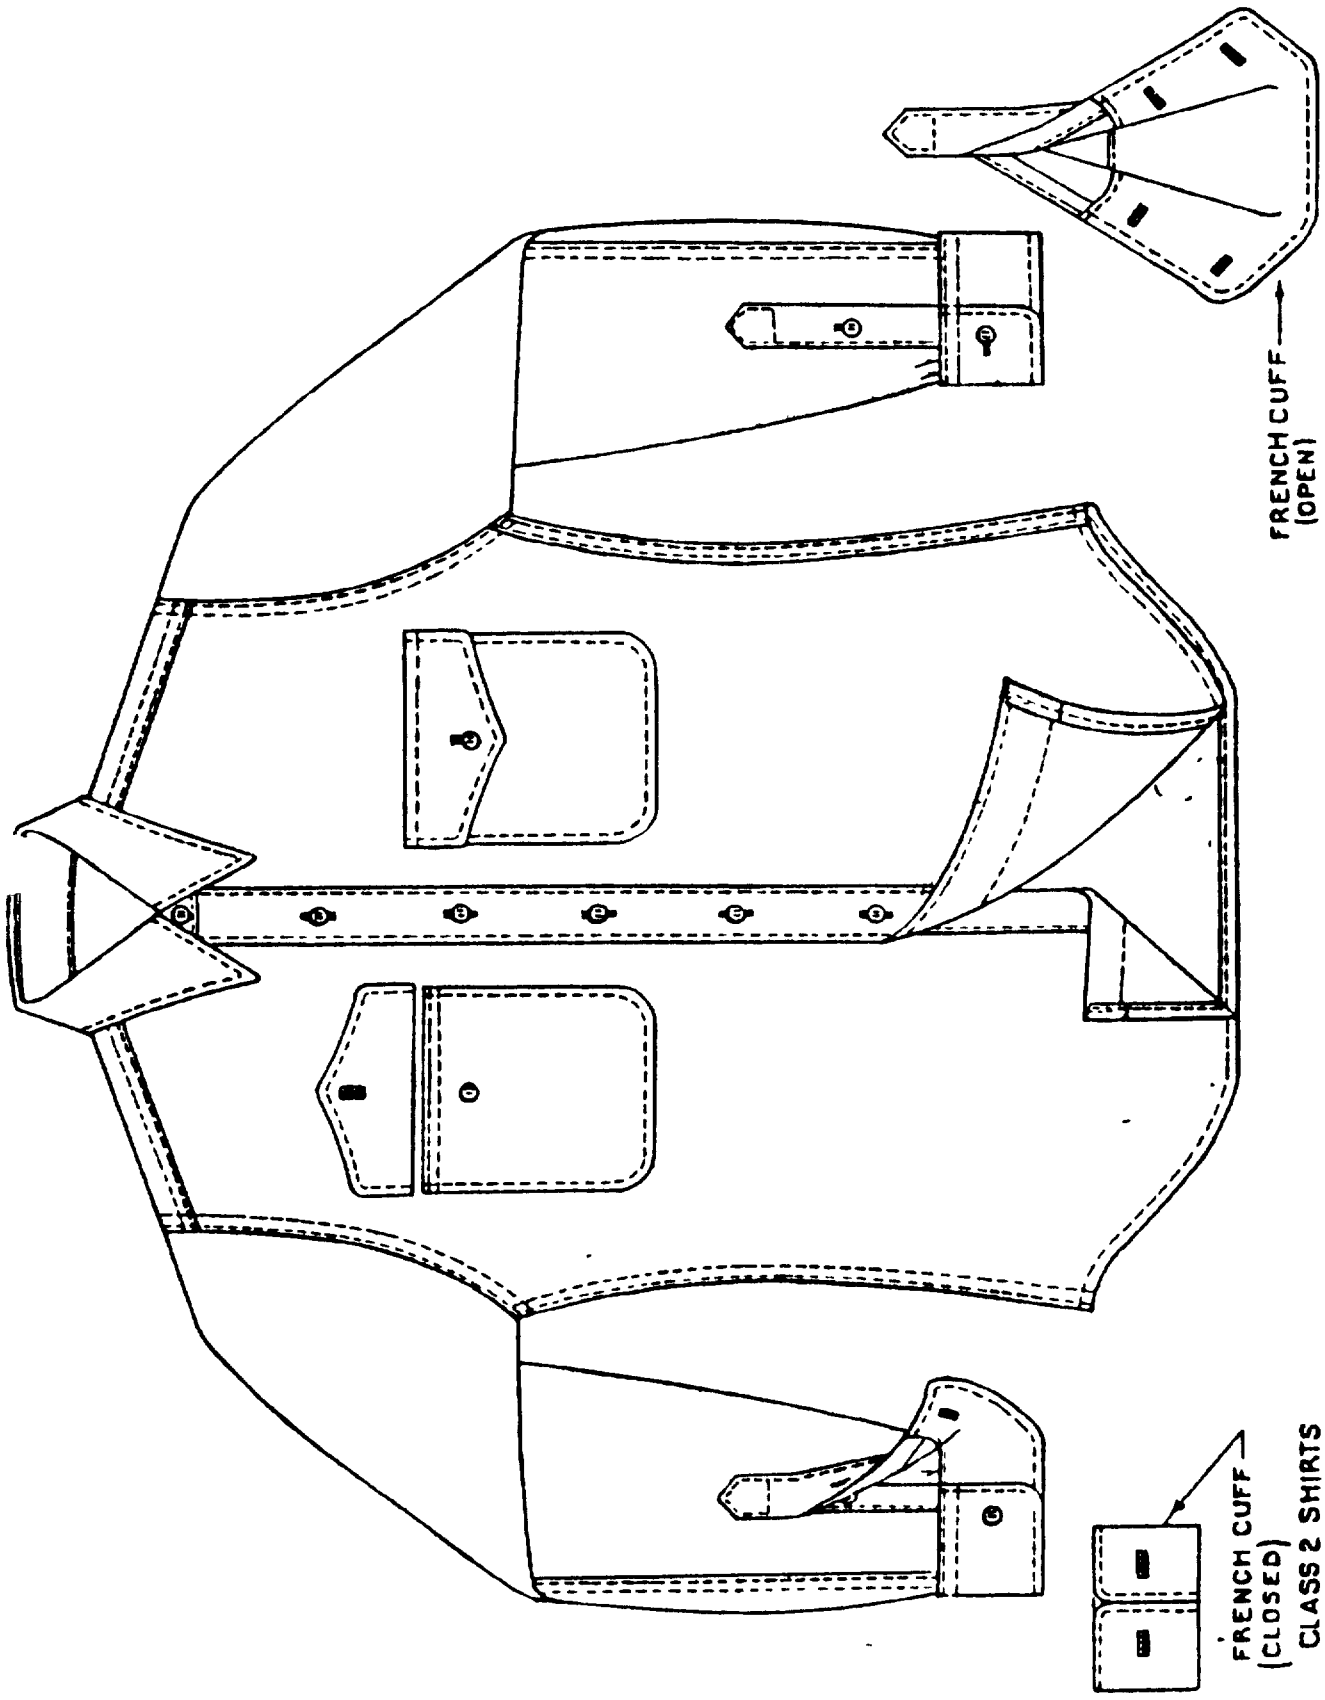


Fig. 3 Shirt, Men's: Long Sleeve–Classes 2 and 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

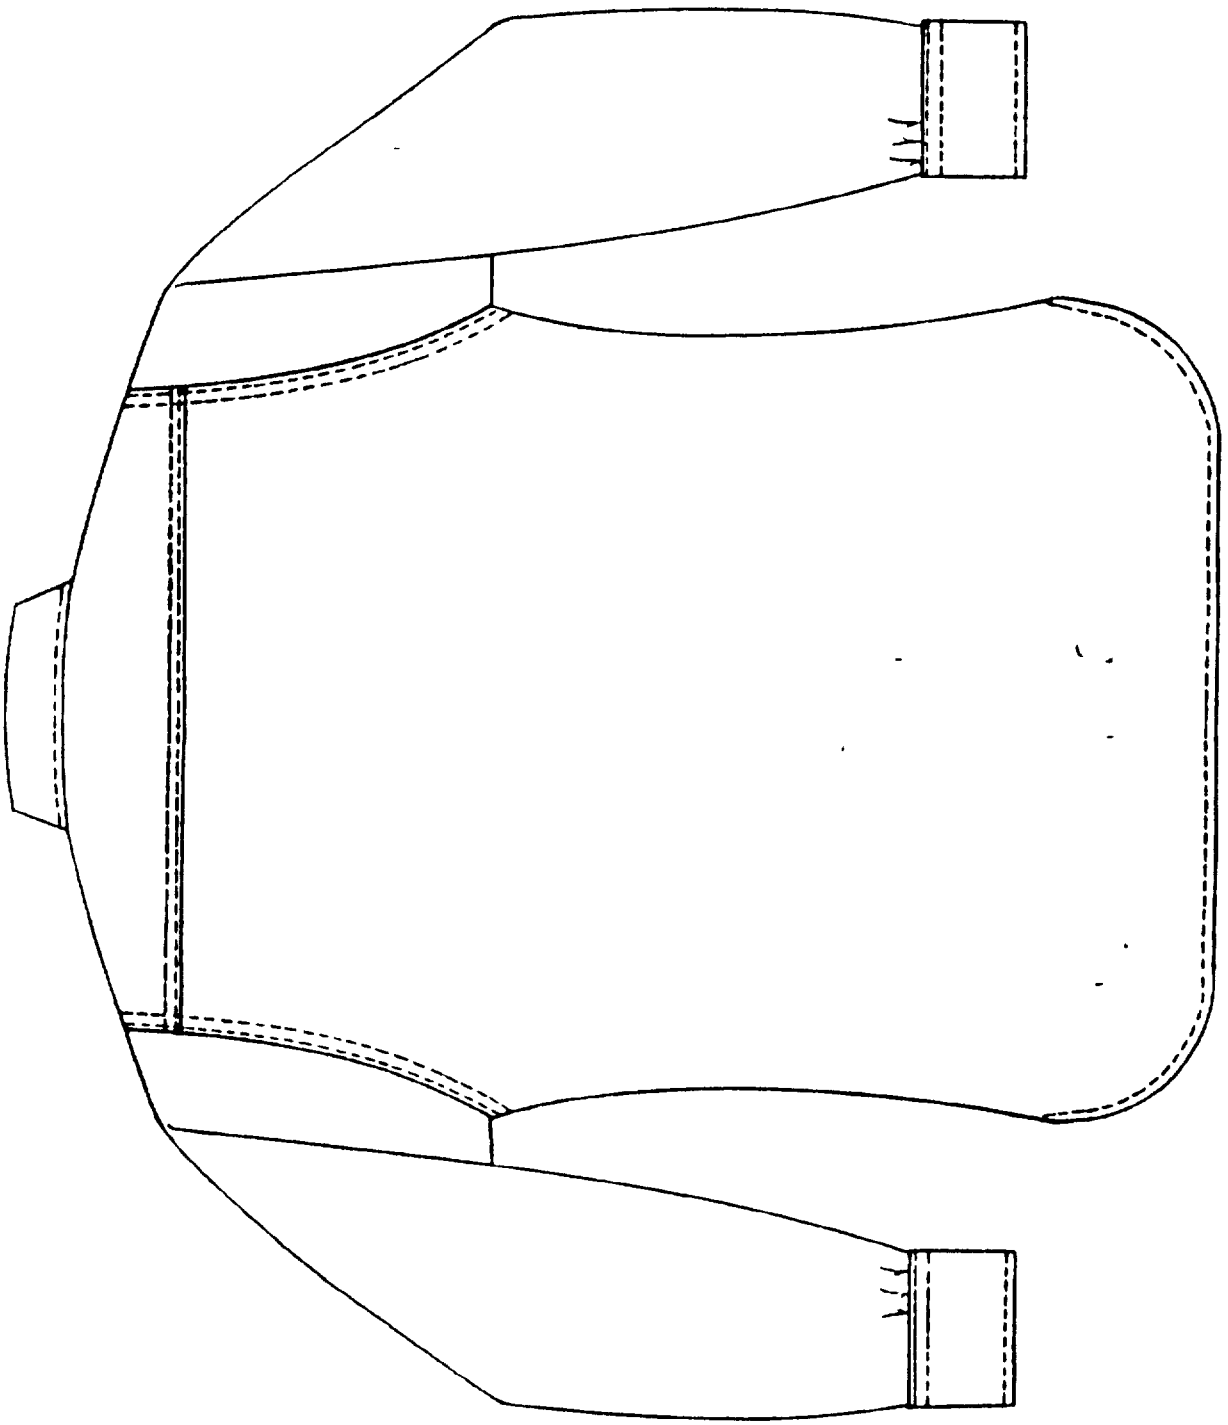


Fig. 4 Shirt, Men's: Long Sleeve–Classes 2 and 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-S-3649G(MC)	SHIRT, MEN'S; LONG SLEEVE

3a NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last First MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street City State ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding General
Marine Corps Research, Development
and Acquisition Command, Code PSE-C
Washington, D.C. 20380-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:38Z
Check the source to verify that this is the current version before use.