FED SUP CLASS
5340

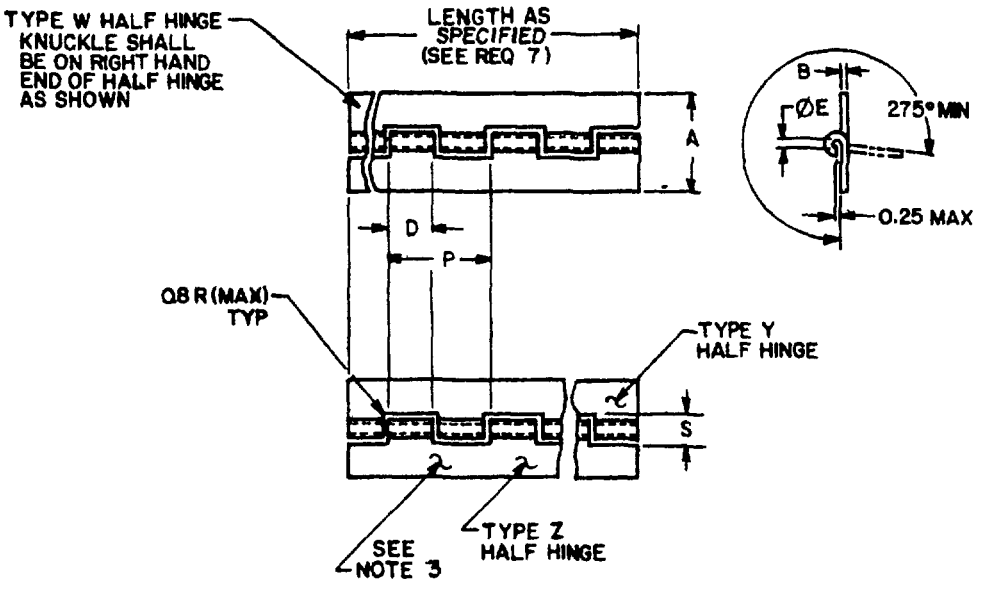



TABLE I DASH NUMBERS AND DIMENSIONS

| DASH NO COMPLETE HINGE | | | A WIDTH OPEN ±0.40 | B 1/ THICKNESS | | ØF HOLE DIA +0.20 -0.03 | | S SLOT DEPTH | | D LOOP +0.03 -0.20 | P PITCH | STOCK LENGTH | | PIN DIA | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AL ALLOY | | CRES | | AL ALLOY | CRES | AL ALLOY | CRES | AL ALLOY | CRES | | | AL ALLOY | CRES | AL ALLOY HINGE | CRES HINGE |
| UN-TREATED | ANO-DIZED | | | | | | | | | | | | | | |
| -1 | -P1 | -C1 | 20 | 0.80 | 0.80 | 1.68 | 1.68 | 4.4 | 4.4 | 14.7 | 30 | 1020 | 1440 | 1.6 | 1.6 |
| -2 | -P2 | -C2 | 25 | 0.80 | 0.80 | 1.68 | 1.68 | 4.4 | 4.4 | 14.7 | 30 | 1020 | 1440 | 1.6 | 1.6 |
| -3 | -P3 | -C3 | 28 | 1.00 | 1.00 | 2.58 | 2.58 | 6.1 | 6.1 | 14.7 | 30 | 2040 | 1440 | 2.5 | 2.5 |
| -4 | -P4 | -C4 | 32 | 1.00 | 1.20 | 2.58 | 3.08 | 6.1 | 7.3 | 14.7 | 30 | 2040 | 1440 | 2.5 | 3.0 |
| -5 | -P5 | -C5 | 40 | 1.00 | 1.60 | 2.58 | 3.08 | 6.1 | 8.4 | 14.7 | 30 | 2040 | 1440 | 2.5 | 3.0 |
| -6 | -P6 | -C6 | 45 | 1.20 | 1.60 | 2.58 | 3.08 | 6.6 | 8.4 | 14.7 | 30 | 2040 | 2040 | 2.5 | 3.0 |
| -7 | -P7 | -C7 | 50 | 1.20 | 1.60 | 2.58 | 5.08 | 6.6 | 11.0 | 14.7 | 30 | 2040 | 2040 | 2.5 | 5.0 |
| -8 | -P8 | -C8 | 60 | 1.60 | 1.60 | 5.08 | 5.08 | 6.6 | 11.0 | 18.7 | 38 | 2280 | 2280 | 5.0 | 5.0 |
| -9 | -P9 | -C9 | 70 | 1.60 | 1.60 | 5.08 | 5.08 | 6.6 | 11.0 | 18.7 | 38 | 2280 | 2280 | 5.0 | 5.0 |

1/ SEE NOTE 4

METRIC

APPROVED 28 OCT 83 REVISED

USER ACTIVITIES

REVIEWER ACTIVITIES
DLA-IS

This military standard is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

| P A AS Other Cust | INTERNATIONAL INTEREST | TITLE HINGE, CONTINUOUS, METRIC | MILITARY STANDARD DS14269(AS) |
|---|---|---|---|
| PROCUREMENT SPECIFICATION NONE | SUPERSEDES: | | PAGE 1 OF 2 |

DD FORM 672-1 (Limited Coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1481

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:38Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

REQUIREMENTS.

1. MATERIAL ALUMINUM ALLOY 5052-H32 IN ACCORDANCE WITH AMS 4016G-78 OR 5052-H34 IN ACCORDANCE WITH AMS 4017G-78, OR CORROSION-RESISTANT STEEL IN ACCORDANCE WITH AMS 5510.

2. FINISH. ALUMINUM ALLOY: UNTREATED OR ANODIZED PER MIL-A-8625, TYPE II AS REQUIRED SEE CODING

3. COMPLETE HINGE SHALL BE FURNISHED WITH A PIN OF THE SAME LENGTH

4. HINGE PINS SHALL BE IN ACCORDANCE WITH DS14270 (AS). CADMIUM PLATED CORROSION-RESISTANT STEEL PINS SHALL BE USED WITH ALUMINUM ALLOY HINGES, AND PASSIVATED CORROSION-RESISTANT STEEL PINS SHALL BE USED WITH CORROSION-RESISTANT STEEL HINGES.

5 TOLERANCE ON PITCH (P) SHALL BE ± 0.2mm AND SHALL BE NON-CUMULATIVE

6. END KNUCKLES AND TANGS MUST BE EQUAL IN LENGTH WITHIN 0.5mm.

7 PART NUMBER. THE BASIC DS SHEET NUMBER IS FOLLOWED BY A CODE LETTER W, Z OR Y INDICATING A HALF-HINGE TYPE, IF REQUIRED, FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE I. THIS IS FOLLOWED BY A STOCK LENGTH NOT TO EXCEED LENGTH SHOWN IN TABLE I.

EXAMPLES: DS14269YC2-1440

- REQUIRED LENGTH (1440 mm)
- HINGE MATERIAL (CRES)
- TYPE Y HALF HINGE
- BASIC DS SHEET NUMBER

DS14269-2-1020 INDICATES COMPLETE HINGE, ALUMINUM ALLOY, UNTREATED, 25 mm WIDE, (OPEN WIDTH OF COMPLETE HINGE) 1020 mm LONG, CADMIUM PLATED CORROSION-RESISTANT STEEL PIN
DS14269W2-1020 INDICATES TYPE "W" HALF HINGE, ALUMINUM ALLOY, UNTREATED, 25 mm WIDE (OPEN WIDTH OF COMPLETE HINGE) 1020 mm LONG, WITHOUT PIN
DS14269-P2-1020 INDICATES COMPLETE HINGE, ALUMINUM ALLOY, ANODIZED, 25 mm WIDE, (OPEN WIDTH OF COMPLETE HINGE) 1020 mm LONG, CADMIUM PLATED CORROSION-RESISTANT STEEL PIN
DS14269-C2-1440 INDICATES COMPLETE HINGE, CORROSION-RESISTANT STEEL, 25 mm WIDE, (OPEN WIDTH OF COMPLETE HINGE) 1440 mm LONG, CORROSION-RESISTANT STEEL PIN
DS14269YC2-1440 INDICATES TYPE "Y" HALF HINGE, CORROSION-RESISTANT STEEL, 25 mm WIDE (OPEN WIDTH OF COMPLETE HINGE), 1440 mm LONG, WITHOUT PIN

NOTES.

1. DIMENSIONS ARE IN MILLIMETERS. UNLESS OTHERWISE SPECIFIED, TOLERANCE SHALL BE ± 0.4 mm

2. REMOVE ALL BURRS AND SHARP EDGES

3 EACH LEAF SHALL BE MARKED WITH THE BASIC NUMBER OF THIS STANDARD AND THE DASH NUMBER FROM TABLE I FOR THE APPROPRIATE WIDTH AND MATERIAL. THE MARKING SHALL BE AT REGULAR INTERVALS ALONG LENGTH OF HINGE SO THAT ANY 76 mm LENGTH WILL HAVE AT LEAST ONE COMPLETE IDENTIFICATION NUMBER THE CHARACTERS SHALL BE STAMPED NOT EXCEEDING 0.25 mm IN DEPTH AND NOT LESS THAN 1.5 mm HIGH. LENGTH MARKING IS NOT REQUIRED IN IDENTIFICATION

4. TOLERANCE ON THICKNESS OF MATERIAL SHALL BE AS FOLLOWS

CRES IN ACCORDANCE WITH ANSI/ASTM A109M-77
ALUMINUM ALLOY. IN ACCORDANCE WITH ANSI/ASTM H35.2M-78

5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED

6 FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

APPROVED 28 OCT 83 REVISED

DLA-IS

This military standard is approved for use by Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

| P A AS Other Cust | INTERNATIONAL INTEREST | TITLE HINGE, CONTINUOUS, METRIC | MILITARY STANDARD DS14269(AS) |
|---|---|---|---|
| PROCUREMENT SPECIFICATION NONE | SUPERSEDES: | | PAGE 2 OF 2 |

DD FORM 1 MAY 73 672-1 (Limited Coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1481

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:38Z
Check the source to verify that this is the current version before use.