
FED SUPPLY CLASS
5935

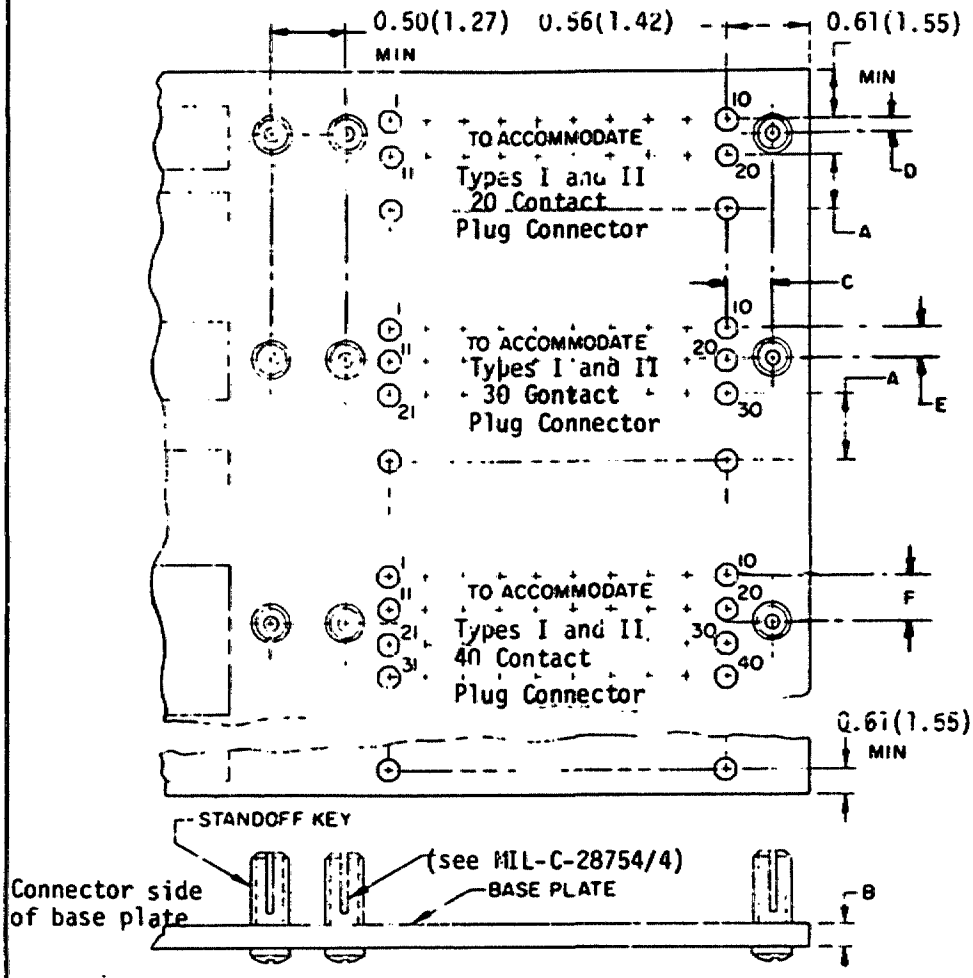

APPROVED 13 Aug 1971 REVISED

User activities: Army MU, MI, Navy YD Air Force NONE

Reviewer activities: Army EL Navy EC, AS, OS, MC Air Force 11, 17,

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A Navy - EC Other Cust AF-17 Army - EL	International interest	TITLE General Contact Layout for Type III Base Plate Connector (.200 Grid)	MILITARY STANDARD MS14034
Procurement Specification MIL-C-28754		SUPERSEDES:	Page 1 of 2

DD FORM 1 Sep 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-1358-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for al new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army EL
Navy EC,AS,OS,MC
Air Force 11,17,

User activities: Army MU,MI,1
Navy YD
Air Force NONE

Dimensions	When used with Grid Pattern 1	When used with Grid Pattern 2	When used with Grid Pattern 3	When used with Grid Pattern 4
A	.400 (10.16) min	.300 (7.62) min	.250 (6.35) min	.200 (5.08) min
B	.125 (3.18) nom	.080 (2.03) nom	.080 (2.03) nom	.080 (2.03) nom
C	.350 (8.89)			
D	.058/.042 (1.47/1.07)			
E	.258/.242 (6.55/6.30)			
F	.258/.242 (6.55/6.30)			

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Millimeters are in parentheses.
4. Exact number and size of the plug connectors which the base plate will accommodate will be left up to the preparing activity.
5. Grid patterns shall be in accordance with MS 14033
6. Standoff keys are to be mounted to properly mate with applicable connector.
7. The axis of the slot of tuning fork contacts or of blade contacts shall be parallel to the centerline joining the applicable standoff keys.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Referenced documents shall be of the issue in effect on date of invitations for bid.

DD FORM 1 Sep 63 672

Procurement Specification: MIL-C-28754

P.A. Navy - EC
Other Cust AF-17 Army - EL
International Interest:

SUPERSEDES:

TITLE: General Contact Layout For Type III Base Plate Connector (.200 Grid)

MILITARY STANDARD

MS14034

Page 2 OF 2

FED. SUP CLASS 5935

APPROVED REVISED

5935-1356-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.